

Cloudera Runtime 7.3.2

Using Hue

Date published: 2020-07-28

Date modified: 2026-03-31

CLOUDERA

<https://docs.cloudera.com/>

Legal Notice

© Cloudera Inc. 2026. All rights reserved.

The documentation is and contains Cloudera proprietary information protected by copyright and other intellectual property rights. No license under copyright or any other intellectual property right is granted herein.

Unless otherwise noted, scripts and sample code are licensed under the Apache License, Version 2.0.

Copyright information for Cloudera software may be found within the documentation accompanying each component in a particular release.

Cloudera software includes software from various open source or other third party projects, and may be released under the Apache Software License 2.0 (“ASLv2”), the Affero General Public License version 3 (AGPLv3), or other license terms. Other software included may be released under the terms of alternative open source licenses. Please review the license and notice files accompanying the software for additional licensing information.

Please visit the Cloudera software product page for more information on Cloudera software. For more information on Cloudera support services, please visit either the Support or Sales page. Feel free to contact us directly to discuss your specific needs.

Cloudera reserves the right to change any products at any time, and without notice. Cloudera assumes no responsibility nor liability arising from the use of products, except as expressly agreed to in writing by Cloudera.

Cloudera, Cloudera Altus, HUE, Impala, Cloudera Impala, and other Cloudera marks are registered or unregistered trademarks in the United States and other countries. All other trademarks are the property of their respective owners.

Disclaimer: EXCEPT AS EXPRESSLY PROVIDED IN A WRITTEN AGREEMENT WITH CLOUDERA, CLOUDERA DOES NOT MAKE NOR GIVE ANY REPRESENTATION, WARRANTY, NOR COVENANT OF ANY KIND, WHETHER EXPRESS OR IMPLIED, IN CONNECTION WITH CLOUDERA TECHNOLOGY OR RELATED SUPPORT PROVIDED IN CONNECTION THEREWITH. CLOUDERA DOES NOT WARRANT THAT CLOUDERA PRODUCTS NOR SOFTWARE WILL OPERATE UNINTERRUPTED NOR THAT IT WILL BE FREE FROM DEFECTS NOR ERRORS, THAT IT WILL PROTECT YOUR DATA FROM LOSS, CORRUPTION NOR UNAVAILABILITY, NOR THAT IT WILL MEET ALL OF CUSTOMER’S BUSINESS REQUIREMENTS. WITHOUT LIMITING THE FOREGOING, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, CLOUDERA EXPRESSLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, QUALITY, NON-INFRINGEMENT, TITLE, AND FITNESS FOR A PARTICULAR PURPOSE AND ANY REPRESENTATION, WARRANTY, OR COVENANT BASED ON COURSE OF DEALING OR USAGE IN TRADE.

Contents

About using Cloudera Data Explorer (Hue).....	4
Accessing and using Cloudera Data Explorer (Hue).....	4
Viewing Hive query details.....	9
Viewing Hive query history.....	9
Viewing Hive query information.....	9
Viewing explain plan for a Hive query.....	10
Viewing Hive query timeline.....	11
Viewing configurations for a Hive query.....	11
Viewing DAG information for a Hive query.....	12
Viewing Impala query details.....	16
Viewing Impala query history.....	16
Viewing Impala query information.....	17
Viewing the Impala query execution plan.....	17
Viewing the Impala query metrics.....	18
Viewing Impala profiles in Cloudera Data Explorer (Hue).....	19
Terminating Hive queries.....	19
Comparing Hive and Impala queries in Cloudera Data Explorer (Hue).....	20
Enable stored procedures in Hue.....	21
Run stored procedure from Hue.....	22
Using SQL to query HBase from Cloudera Data Explorer (Hue).....	23
Querying existing HBase tables.....	24
Enabling the SQL editor autocompleter.....	24
Using governance-based data discovery.....	25
Searching metadata tags.....	25
Creating tables in Cloudera Data Explorer (Hue) by importing files.....	26
Supported non-ASCII and special characters in Cloudera Data Explorer (Hue).....	27
Options to rerun Oozie workflows in Cloudera Data Explorer (Hue).....	30
Creating Iceberg tables using Cloudera Data Explorer (Hue).....	30
Unsupported features in Cloudera Data Explorer (Hue).....	32
Known limitations in Cloudera Data Explorer (Hue).....	32

About using Cloudera Data Explorer (Hue)

Hue provides a one-stop querying experience in Cloudera that leverages Hive and Impala SQL queries.

Accessing and using Cloudera Data Explorer (Hue)


Get started using Hue by analyzing and visualizing your data with Impala and Hive SQL query engines.


About this task

To try Hue without having an account, try running sample queries on <http://demo.gethue.com/>.

Procedure

1. Download and unzip [one year of bike trips](#) from the Bay Area Bike Share program. This file is about 80 MB in size.
2. Create a table from the `~/babs_open_data_year_1/201402_babs_open_data/201402_trip_data.csv` file found in the unzipped `babs_open_data_year_1.zip` file:
 - a) In the Cloudera Manager, select Hue WebUI Hue Load Balanced to launch Hue.
 - b) In the left navigation panel of Hue, make sure the default database is selected, and click the plus sign to create a table as shown in the following image:

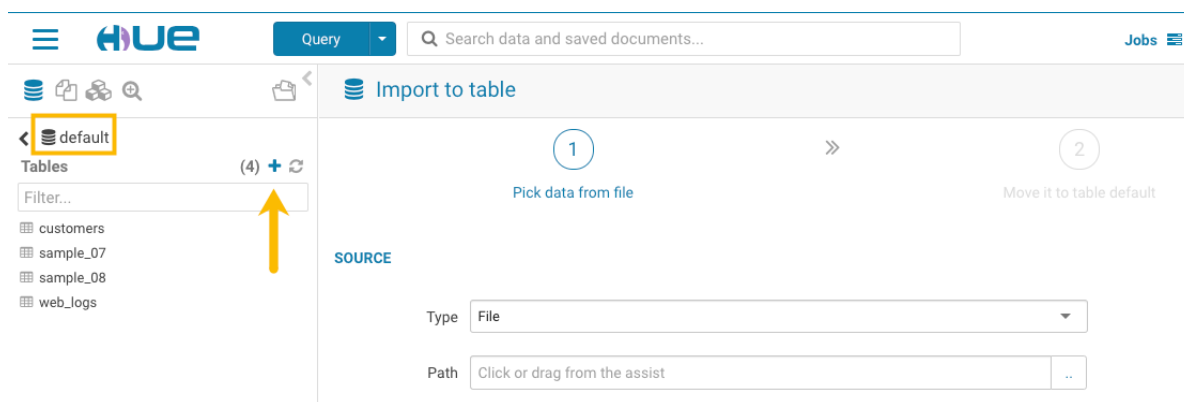

If the default database is not selected, click the "less than" icon  that is next to the database icon in the left panel. This enables you to select the default database.

- c) In the center panel Importer UI, set Type to File.
- d) Drag the `201402_trip_data.csv` file to the Path field as shown in the following image:

e) Set the formats as follows:

- Field Separator = Comma (,)
- Record Separator = New line
- Quote Character = Double Quote

Then click Next at the bottom of the page.

f) Set the properties Format = Text.

g) Edit the FIELDS as follows:

- Rename Bike # to Bike ID
- Change the data type of ZipCode to string.
- Remove all of the spaces in the Name fields.

Then click Submit at the bottom of the page.

3. Click Query at the top of the page and select Editor Hive to open the Hive editor and then create a query.

- Enter the following query into the editor window:

```
SELECT * FROM default.201402_trip_data
LIMIT 10;
```

-

Click the execute icon



to run the query. The following rows are returned:

Query History	Saved Queries	Results (10)	
	201402_trip_data.tripid	201402_trip_data.duration	201402_trip_data
1	4576	63	8/29/2013 14:13
2	4607	70	8/29/2013 14:42
3	4130	71	8/29/2013 10:16
4	4251	77	8/29/2013 11:29
5	4299	83	8/29/2013 12:02
6	4927	103	8/29/2013 18:54
7	4500	109	8/29/2013 13:25
8	4563	111	8/29/2013 14:02
9	4760	113	8/29/2013 17:01
10	4258	114	8/29/2013 11:33

4. Click Query at the top of the page and select Editor Impala to open the Impala SQL editor and then create a query.
 - a. In the left panel, click the refresh icon and select Perform incremental metadata update to make the new table visible to Impala:

The screenshot shows the Hue interface. On the left, a table list for '201402_trip_data' is shown with columns: tripid (bigint), duration (bigint), startdate (string), startstation (string), startterminal (bigint), enddate (string), endstation (string), endterminal (bigint), bikeid (string), subscriptiontype (string), and zipcode (string). A refresh icon (a circular arrow) is next to the table name, with a yellow arrow pointing to it and the text 'refresh icon' below it. A dialog box is open in the center, containing three radio button options: 'Clear cache', 'Perform incremental metadata update.' (which is selected and highlighted with a yellow box), and 'Invalidate all metadata and rebuild index.' The second option has a warning: 'WARNING: This can be both resource and time-intensive.' A 'Refresh' button is at the bottom right of the dialog. The background shows a query editor with a query ID: 'Query 4f4ef726d00ecb36:df8adc6400000000:'.

- b. Enter the following query into the editor window:

```
select 'startstation', 'endstation', count(*) as trips from default.'201402_trip_data'
group by 'startstation', 'endstation' order by trips desc;
```

- c. Click the down arrow just under the execution icon and select Format:

The screenshot shows the Hue Impala query editor interface. On the left, a sidebar lists tables under the 'default' database, including '201402_trip_data', 'customers', 'sample_07', 'sample_08', and 'web_logs'. The main editor area contains the query: `select 'startstation', 'endstation', count(*) as trips from default.'201402_trip_data' group by 'startstation', 'endstation' order by trips desc;`. Below the query, a dropdown menu is open, showing options: 'Explain', 'Format' (highlighted in blue), and 'Clear'. A yellow arrow points to the 'Format' option. Another yellow arrow points to the execution icon (a play button) above the dropdown menu. The results area below the query shows a single row of data: `6448b4d4ca3522f3:831e263800000000`.

This reformats the query:

The screenshot shows the Hue Impala query editor interface with the query reformatted. The query text is: `1 SELECT 'startstation',`
`2 'endstation',`
`3 count(*) AS trips`
`4 FROM default .'201402_trip_data'`
`5 GROUP BY 'startstation',`
`6 'endstation'`
`7 ORDER BY trips DESC;`. A yellow arrow points to the reformatted query text, with the label 'reformatted query' in yellow text next to it. The interface elements are the same as in the previous screenshot.

- d.  Click the save icon, enter a query name, and click Save.

- e.  Click the execute icon to run the query.

5. Create a bar chart that is based on the query results:

- a.  Click the chart icon and then select Bars.


```

1 SELECT `startstation`,
2       `endstation`,
3       count(*) AS trips
4 FROM default.`201402_trip_data`
5 GROUP BY `startstation`,
6          `endstation`
7 ORDER BY trips DESC;
    
```

	startstation	endstation
1	Harry Bridges Plaza (Ferry Building)	Embarcadero at Sansome
2	Townsend at 7th	San Francisco Caltrain (Townsend at 4th)
3	San Francisco Caltrain 2 (330 Townsend)	Townsend at 7th
4	Market at Sansome	2nd at South Park
5	Embarcadero at Sansome	Steuart at Market
6	2nd at South Park	Market at Sansome
7	San Francisco Caltrain (Townsend at 4th)	Harry Bridges Plaza (Ferry Building)
8	2nd at Townsend	Harry Bridges Plaza (Ferry Building)

b. Set the bar chart elements as follows:

- X-AXIS = startstation
- Y-AXIS = trips
- LIMIT = 10

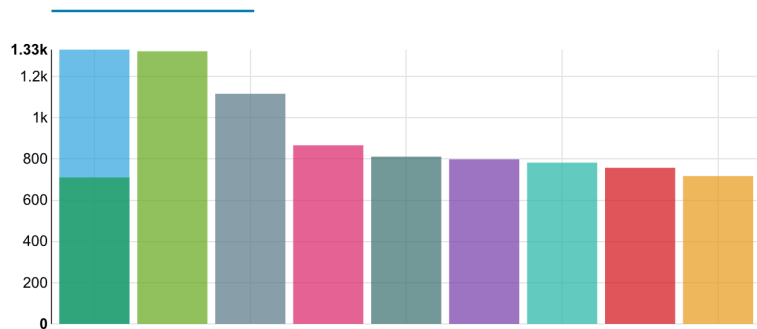


6.



Create a pie chart by clicking the chart icon again and then select Pie.

7.

Download the query results by clicking  and selecting in what format you want to download, copy, or export the results.

Viewing Hive query details

You can search Hive query history, compare two queries, download debug bundles for troubleshooting, and view query details, a graphical representation of the query execution plan, and DAG information on the Job Browser page in Hue.

Viewing Hive query history

The Queries tab on the Job Browser page in Hue displays all the queries that were run from various query interfaces, such as Beeline, Hive Warehouse Connector (HWC), Tableau, Hue, and other JDBC BI clients and tools.

About this task

Only Query Processor Administrators can view historical queries of all users to monitor resource utilization and control costs from the Hue Job Browser. Non-admin users can view only their queries.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.

3. Click Queries.

The Hive queries that were run for the past seven days are displayed. You can select the time period for which you want to view the historical data.

You can also filter queries by their status.

Related Information

[Adding Query Store Administrator users on Cloudera Base on premises clusters](#)

Viewing Hive query information

The Query Info tab provides information such as, the Hive query ID, the user who executed the query, the start time, the end time, the total time taken to execute the query, the tables that were read and written, application ID, Directed Acyclic Graph (DAG) IDs, session ID, LLAP app ID, thread ID, and the queue against which the query was run.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab and click on the query for which you want to view the query details.

The following image shows the **Query Info** tab on the Hue web interface:

The screenshot shows the Hue Job Browser interface. At the top, there are tabs for 'Jobs' and 'Queries'. Below the tabs, there are buttons for 'Queries', 'Kill', and 'Download'. The main content area displays query details for a specific query ID: 'hive_20220509083516_a9d00c94-657a-4d80-9cc2-51851ec711eb'. The query is shown to be successful. Below the query ID, there are tabs for 'Query Info', 'Visual Explain', 'Timeline', 'Query Config', 'DAG Info', 'DAG Flow', 'DAG Swimlane', 'DAG Counters', and 'DAG Configurations'. The 'Query Info' tab is selected, showing the following query text:

```

QUERY
SELECT
*
FROM
customer
WHERE
c_nationkey = 15

```

On the right side of the 'Query Info' tab, there are various metadata fields:

- START TIME: 3 minutes ago
- END TIME: 2 minutes ago
- DURATION: 50s
- TABLES READ: customer (default)
- TABLES WRITTEN: -
- APPLICATION ID: application_1652085158072_0001
- DAG ID: dag_1652085158072_0001_2
- SESSION ID: 76e59bed-40e6-4387-8c35-52606ecacaf4
- LLAP APP ID: -
- THREAD ID: HiveServer2-Background-Pool: Thread-297
- QUEUE: None

Viewing explain plan for a Hive query


The Visual Explain feature provides a graphical representation of the query execution plan. The Explain plan is read from right to left. It provides details about every stage of query execution.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab and click on the query for which you want to view the query details.
4. Click on Visual Explain.

The following image shows the **Visual Explain** tab on the Hue web interface:



5. (Optional) Click  to download the query explain plan in JSON format.

Viewing Hive query timeline

The Timeline tab provides a visual representation of Hive performance logs and shows the time taken by each stage of the query execution.

About this task

Following are the stages in which a query is executed:

- Pre-execution and DAG construction: It is the first phase of query execution and is executed on the Hive engine. It constitutes the time taken to compile, parse, and build the Directed Acyclic Graph (DAG) for the next phase of the query execution.
- DAG submission: It is the second phase in which the DAG that was generated in Hive is submitted to the Tez engine for execution.
- DAG runtime: It shows the time taken by the Tez engine to execute the DAG.
- Post-execution: It is the last phase of query execution in which the files in S3/ABFS are moved or renamed.

Duration data about each phase are distilled into more granular metrics based on query execution logs.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab and click on the query for which you want to view the query details.
4. Click on Timeline.

The following image shows the **Timeline** tab on the Hue web interface:



Viewing configurations for a Hive query

The Query Config tab provides the configuration properties and settings that are used in a Hive query. You can use this tab to verify that configuration property values align with your expectations.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab and click on the query for which you want to view the query details.
4. Click on Query Config.

The following image shows the **Query Config** tab on the Hue web interface:

Query Info	Visual Explain	Timeline	Query Config	DAG Info	DAG Flow	DAG Swimlane
Config Name		Config Value				
hadoop.security.group.mapping.ldap.posix.attr...		uidNumber				
dfs.block.invalidate.limit		1000				
yarn.admin.acl		*				
hive.repl.dump.metadata.only.for.external.table		true				
hive.exec.stagingdir		.hive-staging				
hive.druid.rollup		true				
yarn.federation.enabled		false				
yarn.app.mapreduce.am.job.committer.cancel...		60000				
hive.druid.broker.address.default		localhost:8082				
dfs.disk.balancer.max.disk.throughputInMBper...		10				
dfs.qjournal.select-input-streams.timeout.ms		20000				
hive.llap.io.orc.time.counters		true				
hive.repl.retain.prev.dump.dir		false				
hive.vectorized.execution.mapjoin.native.fast...		true				
dfs.provided.aliasmap.inmemory.leveldb.dir		/tmp				
yarn.nodemanager.process-kill-wait.ms		5000				
yarn.minicluster.use-rpc		false				
io.map.index.interval		128				

Viewing DAG information for a Hive query

Directed Acyclic Graph (DAG) is created by the Hive engine every time you query the Hive Virtual Warehouse. The Hive SQL queries are compiled and converted into a Tez execution graph also known as a DAG. DAG is a collection of vertices where each vertex executes a fragment of the query or script. Hue provides a web interface to view detailed information about DAGs.

About this task

Directed connections between vertices determine the order in which they are executed. For example, the vertex to read a table must be run before a filter can be applied to the rows of that table. As another example, consider a vertex that reads a user table that is very large and distributed across multiple computers and multiple racks. Reading the table is achieved by running many tasks in parallel.



Important: The DAG information tabs (**DAG Info**, **DAG Flow**, **DAG Swimlane**, **DAG Counters**, **DAG Configurations**) are displayed only if the Tez engine is used for query execution. The Tez engine is typically utilized for complex queries.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.

The **Job Browser** page is displayed.

3. Go to the **Queries** tab and click on the query for which you want to view the query details.
4. Click DAG Info to see the DAG ID, DAG name, the status of the query, the time taken to execute the DAG, start time, and end time.

The following image shows the **DAG Info** tab on the Hue web interface:

QUERY ID	USER	STATUS
hive_20220509083516_a9d00c94-657a-4d80-9cc2-51851ec711eb	[REDACTED]	✓ SUCCESS

Query Info Visual Explain Timeline Query Config **DAG Info** DAG Flow DAG Swimlane DAG Counters DAG Configurations

DAG ID	DAG NAME
dag_1652085158072_0001_2	SELECT * FROM customer WHERE c_nationke...15 (Stage-1)
STATUS	DURATION
SUCCEEDED	00:00:50
START TIME	END TIME
3 minutes ago	2 minutes ago


The following table lists and describes the status of the Tez job:

Status	Description
Submitted	The DAG is submitted to Tez but is not running
Running	The DAG is currently running
Succeeded	The DAG was completed successfully
Failed	The DAG failed to complete successfully
Killed	The DAG was stopped manually
Error	An internal error occurred when executing the DAG

5. Click DAG Flow to see the DAG in the form of a flowchart.

You can gain insight into the complexity and the progress of executing jobs, and investigate the vertices that have failures or are taking a long time to complete.

The following image shows the **DAG Flow** tab on the Hue web interface::

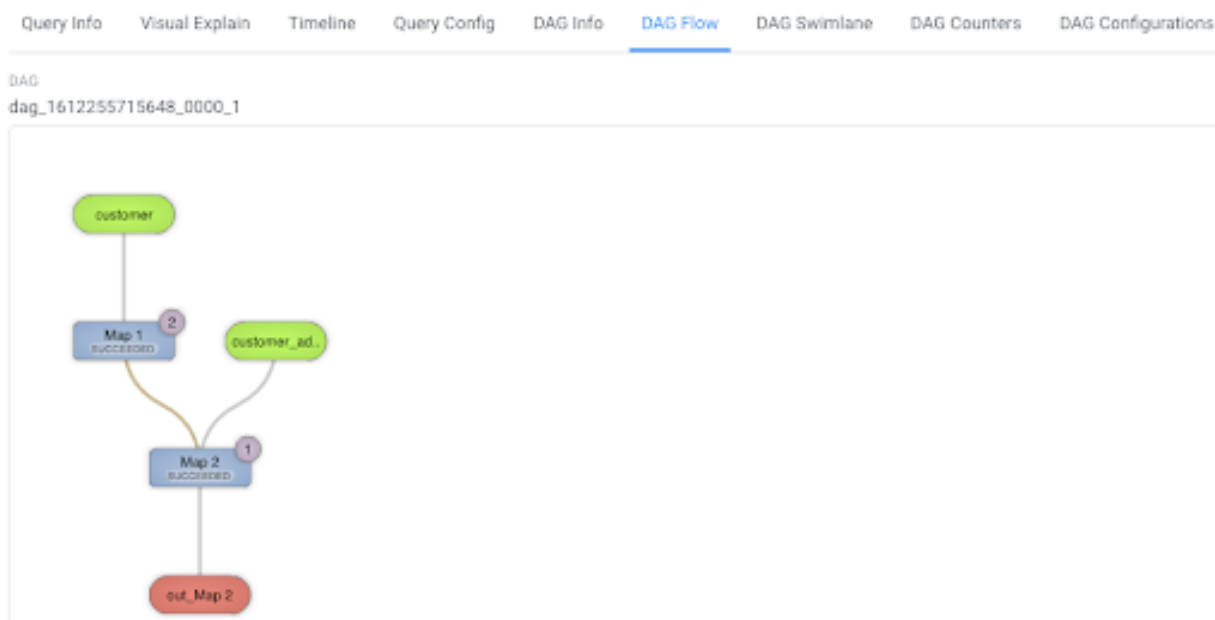


Here, the input to vertices Map 1 and Map 2 are the tables displayed in green boxes. Next, Map 2 depends on the result set generated by Map 1. Map 2 is the last vertex in the DAG flow and after it completes its execution, the query output is written to a file in a filesystem such as S3 or ABFS.

There are a few options to change the layout of the DAG flow. You can hide the input and the output nodes to view only the task vertices by clicking the Toggle source/sink visibility button. You can switch between the horizontal and vertical orientation by clicking the Toggle orientation button.

- Click DAG Swimlane to see the DAG of the vertices against time.

Each mapping and reducing task is a vertex. Each horizontal bar of the swimlane represents the total time taken by the vertex to complete the execution. The vertical lines indicate the time when the vertex was initialized, the time when the vertex started, the time when the first task started, the time when the last task was completed, and the time when the vertex finished its execution. When you mouse over the vertical line, the bubble displays the stage of the vertex execution and provides a timestamp. The vertical lines connecting two vertices denote the dependency of a vertex on another vertex.

The following image shows the **DAG Swimlane** tab on the Hue web interface:

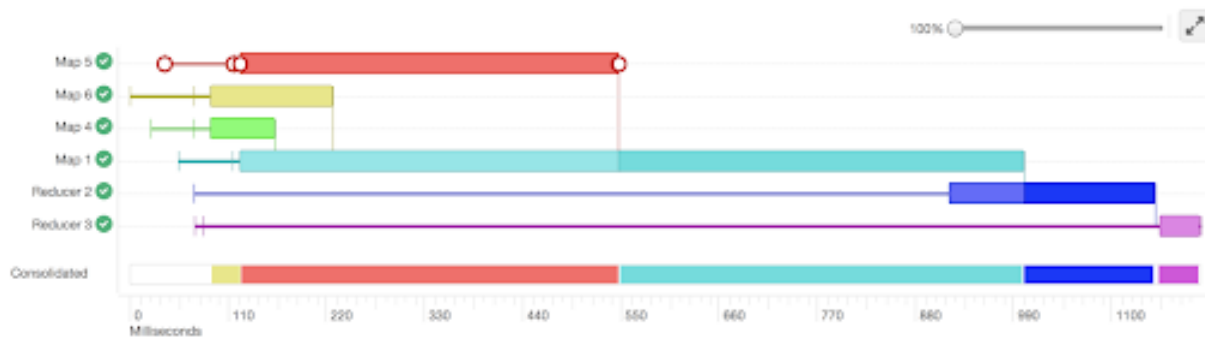

In this example, Map 1 depends on the results of Map 5. Map 1 will finish its execution only when Map 5 finishes its execution successfully. Similarly, Reducer 2 depends on Map 1 to complete its execution.

The consolidated timeline shows the percentage of time each vertex took to complete executing.

- Click DAG Counters to see details such as the number of bytes read and written, number of tasks that initiated and ran successfully, amount of CPU and memory consumed, and so on.

The **DAG Counters** tab provides a way to measure the progress or the number of operations that occur within a generated DAG. Counters are used to gather statistics for quality control purposes or problem diagnosis.

The following image shows the **DAG Counters** tab on the Hue web interface:

Query Info	Visual Explain	Timeline	Query Config	DAG Info	DAG Flow	DAG Swimlane	DAG Counters	DAG Configurations
Group Name			Counter Name		DAG : dag_1652085158072_0001_2			
org.apache.tez.common.counters.DAGCounter			NUM_SUCCEEDED_TASKS		54			
org.apache.tez.common.counters.DAGCounter			TOTAL_LAUNCHED_TASKS		54			
org.apache.tez.common.counters.DAGCounter			DATA_LOCAL_TASKS		54			
org.apache.tez.common.counters.DAGCounter			AM_CPU_MILLISECONDS		5890			
org.apache.tez.common.counters.DAGCounter			AM_GC_TIME_MILLIS		22			
org.apache.tez.common.counters.FileSystem...			FILE_BYTES_WRITTEN		1074416910			
org.apache.tez.common.counters.FileSystem...			S3A_BYTES_READ		6742239795			
org.apache.tez.common.counters.FileSystem...			S3A_READ_OPS		1124			
org.apache.tez.common.counters.TaskCounter			TASK_DURATION_MILLIS		759357			
org.apache.tez.common.counters.TaskCounter			INPUT_RECORDS_PROCESSED		146519			
org.apache.tez.common.counters.TaskCounter			INPUT_SPLIT_LENGTH_BYTES		12387638515			
HIVE			CREATED_FILES		36			
HIVE			RECORDS_IN_Map_1		150000000			
HIVE			RECORDS_OUT_0		6003115			
HIVE			RECORDS_OUT_OPERATOR_FIL_5		6003115			
HIVE			RECORDS_OUT_OPERATOR_FS_7		6003115			
HIVE			RECORDS_OUT_OPERATOR_SEL_6		6003115			
HIVE			RECORDS_OUT_OPERATOR_TS_0		150000000			

8. Click DAG Configurations to see the Tez configuration details for a query that has a DAG associated with it. The following image shows the **DAG Configurations** tab on the Hue web interface:

Query Info	Visual Explain	Timeline	Query Config	DAG Info	DAG Flow	DAG Swimlane	DAG Counters	DAG Configurations
Config Name			DAG : dag_1612255715648_0000_1					
dfs.namenode.fs-limits.max-xattrs-per-inode			32					
dfs.namenode.delegation.token.always-use			false					
yam.nodemanager.runtime.linux.docker.delaye..			false					
yam.timeline-service.handler-thread-count			10					
yam.timeline-service.webapp.rest-csrf.custom..			X-XSRF-Header					
fs.s3a.retry.limit			7					
dfs.client.write.byte-array-manager.count-reset..			10000					
yam.nodemanager.linux-container-executor.cg..			/hadoop-yam					
mapreduce.shuffle.connection-keep-alive.time..			5					
mapreduce.client.libjars.wildcard			true					
hive.zookeeper.kerberos.enabled			false					

Viewing Impala query details

You can view Impala query details, query plan, execution summary, and query metrics on the new Impala Queries tab on the Job Browser page in Hue, and use this information to tune and optimize your queries. You can also view Impala query profiles on the Impala tab.

Viewing Impala query history

The Impala Queries tab on the Job Browser page in Hue displays all the queries that were run from various query interfaces, such as Impala-shell, Impyla, Hue, and other JDBC BI clients and tools.

About this task

Only Query Processor Administrators can view historical queries of all users to access history of queries run in that Impala Virtual Warehouse from the Hue Job Browser. Non-admin users can only view only their own queries.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Click Queries.

The Impala queries that were run for the past seven days are displayed. You can select the time period for which you want to view the historical data.

You can also search using the query ID, sort queries by various parameters such as duration, peak memory, and so on, and filter queries by their status.

Related Information

[Adding Query Store Administrator users on Cloudera Base on premises clusters](#)

Viewing Impala query information

The Query Info tab in Hue provides information such as, the Impala query ID, the user who executed the query, the start time, the end time, the total time taken to execute the query, the coordinator that received the query, CPU time, rows produced, peak memory, and HDFS bytes read.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Impala Queries** tab and click on the query for which you want to view the query details.

The following image shows the **Query Info** tab on the Hue web interface:

The screenshot displays the Hue web interface with the 'Impala Queries' tab selected. The 'Query Info' sub-tab is active, showing the following details:

QUERY ID	USER	STATUS
e140b4f4dff9c2d5:cf78c8f400000000	admin	✓ FINISHED

Below the table, the 'Query Info' section is expanded, showing the query text and various performance metrics:

```

QUERY
SELECT
*
FROM
`DEFAULT`.`sample_08`
LIMIT
105
  
```

START TIME	2 days ago
END TIME	2 days ago
DURATION	3s
QUERY TYPE	QUERY
USER NAME	admin
COORDINATOR	sree-test2-1.sree-test2.root.hwx.site:27000
CPU TIME	1ms
ROWS PRODUCED	105
PEAK MEMORY	4 MB
HDFS BYTES READ	93.9 KB

Viewing the Impala query execution plan

The query execution plan in Hue provides details on how the query will be executed, the operators involved, and other information before the query is submitted to the Impala engine.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Impala Queries** tab and click on the query for which you want to view the execution plan.
The following image shows the **Plan** tab on the Hue web interface:

The screenshot shows the Hue Job Browser interface. At the top, there's a navigation bar with 'Job Browser' and tabs for 'Jobs', 'Impala', 'Hive', 'Workflows', 'Schedules', 'Bundles', 'SLAs', and 'Impala Queries'. Below this, there's a 'Queries' section with a 'Refresh' button. A table lists query details:

QUERY ID	USER	STATUS
e140b4f4dff9c2d5cf78c8f400000000	admin	FINISHED


Below the table, there are tabs for 'Query Info', 'Plan', 'Exec Summary', and 'Metrics'. The 'Plan' tab is selected, showing a detailed execution plan for the query: `SELECT * FROM 'default'.sample_08 LIMIT CAST(105 AS TINYINT)`. The plan includes stages like PLAN FRAGMENT, EXCHANGE, and SCAN HDFS, with resource estimates and statistics for each.

Viewing the Impala query metrics

You can view detailed, aggregated metrics for various counters such as `hdfs_bytes_read`, `memory_per_node_peak`, `thread_cpu_time`, and so on, on the Metrics tab in Hue.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Impala Queries** tab and click on the query for which you want to view the query metrics.
The following image shows the **Metrics** tab on the Hue web interface:

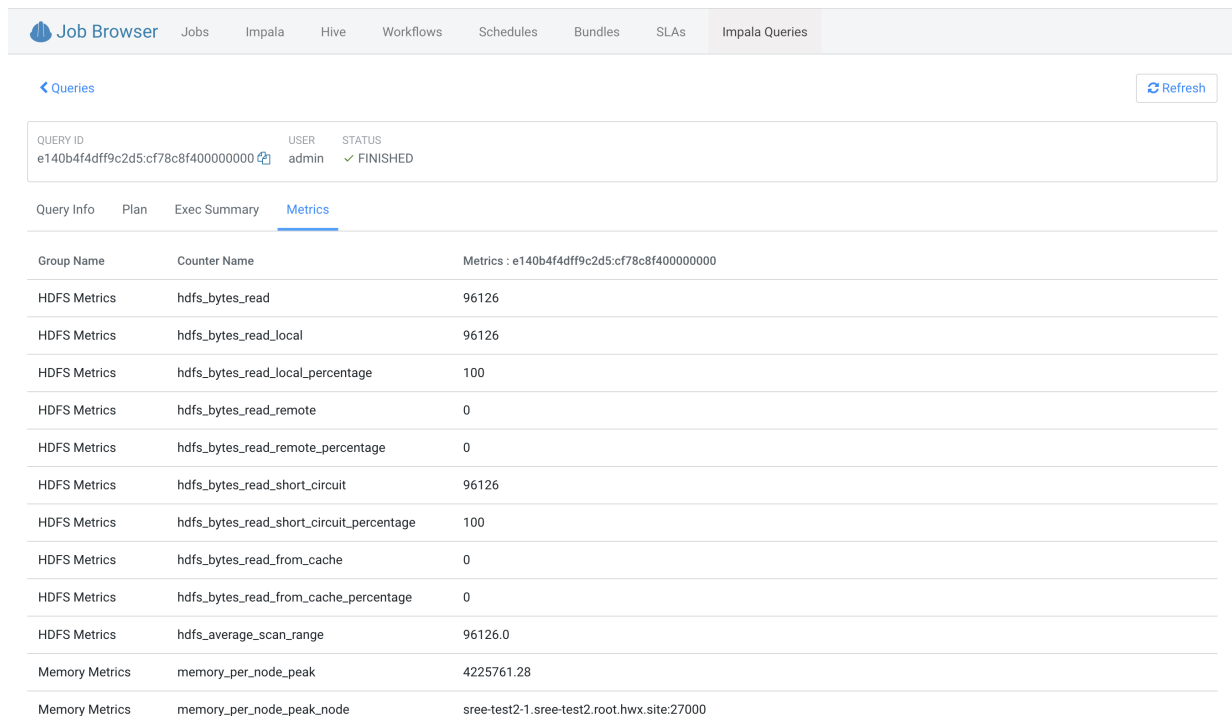

The screenshot shows the Hue Job Browser interface. At the top, there are navigation tabs: Job Browser, Jobs, Impala, Hive, Workflows, Schedules, Bundles, SLAs, and Impala Queries. Below the tabs, there is a 'Queries' section with a 'Refresh' button. A table displays query details for a specific query ID: e140b4f4dff9c2d5:cf78c8f400000000. The user is 'admin' and the status is 'FINISHED'. Below this, there are tabs for 'Query Info', 'Plan', 'Exec Summary', and 'Metrics'. The 'Metrics' tab is active, showing a table of metrics for the query.

Group Name	Counter Name	Metrics : e140b4f4dff9c2d5:cf78c8f400000000
HDFS Metrics	hdfs_bytes_read	96126
HDFS Metrics	hdfs_bytes_read_local	96126
HDFS Metrics	hdfs_bytes_read_local_percentage	100
HDFS Metrics	hdfs_bytes_read_remote	0
HDFS Metrics	hdfs_bytes_read_remote_percentage	0
HDFS Metrics	hdfs_bytes_read_short_circuit	96126
HDFS Metrics	hdfs_bytes_read_short_circuit_percentage	100
HDFS Metrics	hdfs_bytes_read_from_cache	0
HDFS Metrics	hdfs_bytes_read_from_cache_percentage	0
HDFS Metrics	hdfs_average_scan_range	96126.0
Memory Metrics	memory_per_node_peak	4225761.28
Memory Metrics	memory_per_node_peak_node	sree-test2-1.sree-test2.root.hwx.site:27000

Viewing Impala profiles in Cloudera Data Explorer (Hue)

When Impala executes any query, it captures the runtime details of the execution in a query profile. You can now view the Impala query profile from Hue's Job Browser page.

About this task

Query Processor Administrators can view query details of all users unlike the non-admin users who can view query details only for their queries. This enables the Query Processor Administrators to provide a comprehensive report on past queries and running queries.

Procedure

1. Go to the Cloudera Data Warehouse web interface and open Hue from your Impala Virtual Warehouse.
2. Click Jobs on the left-assist panel to go to the **Job Browser** page and then click on the Impala tab.
3. Click on the query for which you want to view the Impala query profile.

The query execution details are displayed.

4. Click on the Profile tab.

Terminating Hive queries

If a query is running for longer than expected, or you have accidentally triggered it, then you can stop the query to free up the resources. Hue also allows you to stop multiple queries at once.

About this task



Note: This feature is available only for Hive queries. Only admin users or Hue superusers can stop running queries.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab.
A list of queries that were run is displayed.
4. Select the queries that you want to stop and click Kill.

Comparing Hive and Impala queries in Cloudera Data Explorer (Hue)

You can compare two queries to know how each query is performing in terms of speed and cost-effectiveness. Hue compares various aspects of the two queries, based on which you can identify what changed between the executions of those two queries, and you can debug performance-related issues between different runs of the same query.

About this task

The query comparison report provides you a detailed side-by-side comparison of your queries.

For Hive queries, it includes recommendations for optimizing each query, metadata about the queries, visual explain for each query, query timeline, query configuration, Directed Acyclic Graph (DAG) information, DAG flows, DAG swimlanes, DAG counters, and DAG configurations.

For Impala queries, the query comparison report includes query details, execution plan details, and the aggregated metrics for both the queries and provides a variance between the two.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab.
A list of queries that were run is displayed.
4. Select the two queries you want to compare and click Compare.
Query comparison report for Hive queries:

Queries

QUERY ID: hive_20220509083516_a9d00c94-657a-4d80-9cc2-51851ec711eb

USER: [redacted]

Query Info | Visual Explain | Timeline | Query Config | DAG Info | DAG Flow | DAG Swimlane | DAG Counters | DAG Configurations

```

QUERY
SELECT
*
FROM
customer
WHERE
c_nationkey = 15
            
```

START TIME: 2 hours ago

END TIME: 2 hours ago

DURATION: 50s

TABLES READ: customer (default)

TABLES WRITTEN: -

APPLICATION ID: application_1652085158072_0001

DAG ID: dag_1652085158072_0001_2

SESSION ID: 76e59bed-40e6-4387-8c35-52606ecacaf4

QUERY ID: hive_20220509083138_56c823bb-c635-4d1e-b5e4-b031b5c0e21e

USER: [redacted]

```

QUERY
SELECT
*
FROM
customer
            
```

START TIME: 2 hours ago

END TIME: 2 hours ago

DURATION: 148ms

TABLES READ: customer (default)

TABLES WRITTEN: -

APPLICATION ID:

DAG ID:

SESSION ID: 1ac06098-d5cb-46ca-8d11-4e19d938871c

LLAP APP ID:

THREAD ID: HiveServer2-Background-Pool: Thread-245

Query comparison report for Impala queries:

Job Browser | Jobs | Impala | Hive | Workflows | Schedules | Bundles | SLAs | Impala Queries

Queries

QUERY ID: e140b4f4dff9c2d5:cf78c8f400000000

USER: admin

STATUS: FINISHED

QUERY ID: cb4137379d658f7a:b9c3488400000000

USER: admin

STATUS: FINISHED

Query Info | Plan | Exec Summary | Metrics

Group Name	Counter Name	Metrics : e140b4f4dff9c2d5:cf78c8f400000000	Metrics : cb4137379d658f7a:b9c3488400000000	Variance
HDFS Metrics	hdfs_bytes_read	96126	96126	1x
HDFS Metrics	hdfs_bytes_read_local	96126	96126	1x
HDFS Metrics	hdfs_bytes_read_local_percentage	100	100	1x
HDFS Metrics	hdfs_bytes_read_remote	0	0	
HDFS Metrics	hdfs_bytes_read_remote_percentage	0	0	
HDFS Metrics	hdfs_bytes_read_short_circuit	96126	96126	1x
HDFS Metrics	hdfs_bytes_read_short_circuit_percentage	100	100	1x
HDFS Metrics	hdfs_bytes_read_from_cache	0	0	
HDFS Metrics	hdfs_bytes_read_from_cache_percentage	0	0	
HDFS Metrics	hdfs_average_scan_range	96126.0	96126.0	1x
Memory Metrics	memory_per_node_peak	4225761.28	4225761.28	1x
Memory Metrics	memory_per_node_peak_node	sree-test2-1.sree-test2.root.hw.x.site:27000	sree-test2-1.sree-test2.root.hw.x.site:27000	
Thread Time Metrics	thread_total_time	9	33	3.67x

Enabling stored procedures for Hive on Cloudera Base on premises

To create, edit, and drop procedures and functions that are written in Hive Hybrid Procedural SQL (HPL/SQL) using the Hue query editor, you must enable the hplsql option in the Hue Advanced Configuration Snippet.

About this task



Note: Hue enables you to switch between Hive and HPL/SQL interpreters. By default, the regular Hive interpreter is enabled when you add the Hue service to your cluster. To enable the HPL/SQL interpreter, you must update Hue's Advanced Configuration Snippet in Cloudera Manager. However, updating Hue's Advanced Configuration Snippet overrides the default configuration. Therefore, to use both Hive and HPL/SQL interpreters, you must enable both by updating Hue's Advanced Configuration Snippet.

Procedure

1. Log in to Cloudera Manager as an administrator.
2. Go to [Clusters Hue Configuration](#) and add the following lines in the Hue Service Advanced Configuration Snippet (Safety Valve) for hue_safety_valve.ini field:

```
[notebook]
  [[interpreters]]
    [[[hive]]]
      name=Hive
      interface=hiveserver2
    [[[hplsql]]]
      name=Hplsql
      interface=hiveserver2
```

3. Click Save Changes.
4. Restart the Hue service.
5. Go to [Clusters Hive on Tez Configuration](#) and add the following property name and its value in the Hive Service Advanced Configuration Snippet (Safety Valve) for hive-site.xml field:

Name: hive.security.authorization.sqlstd.confwhitelist.append

Value: QUERY_EXECUTOR|HPLSQL
6. Click Save Changes.
7. Restart the Hive on Tez service.

How to run a stored procedure from Cloudera Data Explorer (Hue) in Cloudera Base on premises

HPL/SQL allows you to implement business logic using variables, expressions, flow-of-control statements, and iterations. HPL/SQL makes SQL-on-Hadoop more dynamic. You can leverage your existing procedural SQL skills, and use functions and statements to make your typical ETL development more productive. Hue provides a smart interface to run stored procedures.



Note: This feature is available only for Hive queries.

To run stored procedures from Hue, enable the HPL/SQL interpreter by configuring Hue's Advanced Configuration Snippet in Cloudera Manager as described in *Enabling stored procedures for Hive on Cloudera Base on premises*.

The following example creates a procedure and returns records by passing a cursor:

```
print 'Hello world';/
CREATE PROCEDURE greet(name STRING)
BEGIN
  PRINT 'Hello ' || name;
END;/
CREATE PROCEDURE even(cur OUT SYS_REFCURSOR)
BEGIN
  OPEN cur FOR
  SELECT n FROM NUMBERS
```

```

WHERE MOD(n, 2) == 0;
END;/
CREATE PROCEDURE set_message(IN name STRING, OUT result STRING)
BEGIN
  SET result = 'Hello, ' || name || '!';
END;
-- Call the procedure and print the results
DECLARE str STRING;
CALL set_message('world', str);
PRINT str;

```



Attention: In the hpsql mode, you must terminate the commands using the forward slash (/). The semicolon (;) is used throughout procedure declarations and can no longer be relied upon to terminate a query in the editor.



Note: HPL/SQL does not support all types of Hive statements, such as JOIN or EXPLAIN. Refer to the [HPL/SQL Reference](#) for more information.

Related Information

[Enabling stored procedures for Hive on Cloudera Base on premises](#)


Using SQL to query HBase from Cloudera Data Explorer (Hue)

Hue provides a simple SQL interface to create and manipulate SQL tables that are stored in HBase, and define and manipulate views on HBase tables using Apache Phoenix in addition to HBase shell and database API.

Cloudera does not recommend manipulating Phoenix tables from HBase as this can lead to data loss.

The SQL connector is shipped with Hue so that you do not have to download and configure it yourself.

Following are some examples to create and manipulate the Phoenix SQL tables from the Hue editor:

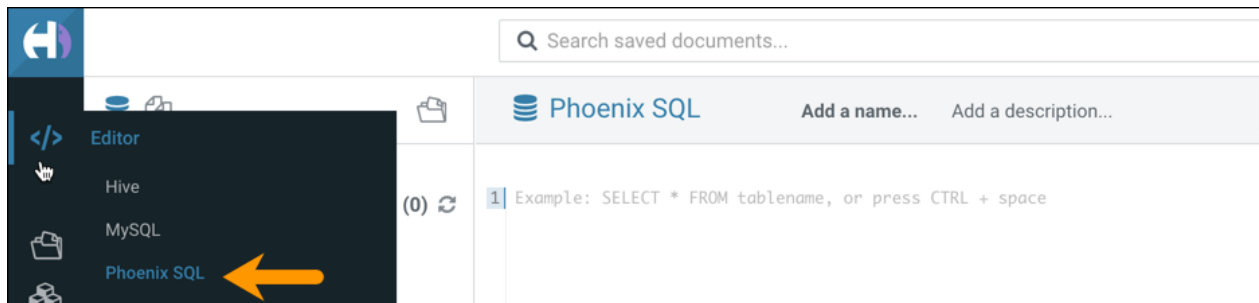

Creating a table

```

CREATE TABLE IF NOT EXISTS Company (company_id INTEGER PRIMARY KEY, name VAR
CHAR(225));

```

Upserting values in the table

```

UPSERT INTO Company VALUES(1, 'Cloudera');
UPSERT INTO Company VALUES(2, 'Apache');

```

Querying the table

```

SELECT * FROM Company;

```

Deleting a record

```
DELETE FROM Company WHERE COMPANY_ID=1;
```

Dropping the table

```
DROP TABLE Company;
```

Querying existing HBase tables

To use SQL for querying data from existing HBase tables, you must create a view in Phoenix pointing to the HBase table.

To map the existing tables to the views, run the following statement using the Phoenix editor on the Hue web interface:

```
CREATE VIEW if not exists "[***HBASE-TABLE-NAME***]" ( pk VARCHAR PRIMARY KEY, val VARCHAR );
```

Enabling the SQL editor autocompleter

Autocompleter provides finely tuned SQL suggestions for Hive and Impala dialects while you enter queries into the editor window. See [Brand new Autocompleter for Hive and Impala](#) in the Hue blog.

About this task

Autocompleter is enabled by default. To manually enable or disable it, open the editor configuration panel and edit settings as follows:


Procedure

1. Log in to Hue and go to either the Hive or Impala editor.
2. Place your cursor in the editor window and then use one of the following keyboard shortcuts to open the editor configuration panel:
 - On a Mac system, use the Command key followed by a hyphen and then a comma:
Command-,
 - On a Windows system, use the Ctrl key followed by a hyphen and then a comma:
Ctrl-,



Tip: Type a question mark (?) anywhere but in the active editor window to open a menu of editor keyboard shortcuts.

3. To enable autocompletion, check the box adjacent to Enable Autocompleter. When you check Enable Autocompleter, Enable Live Autocompletion is automatically enabled as well. Place your cursor in the editor window to close the configuration panel.

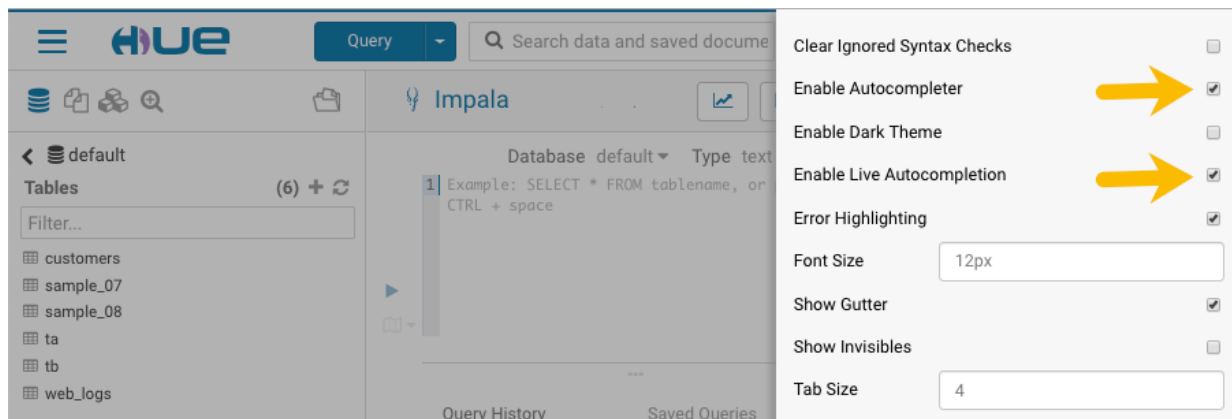

4. To disable autocompletion:

- Uncheck Enable Live Autocompletion but leave Enable Autocompleter checked, and then place your cursor in the editor window to close the configuration panel. This disables live autocompletion, but if you want to use autocompletion while building your queries in the editor, enter the following key stroke sequence to activate autocompletion: Ctrl + Space Key
- Uncheck both Enable Autocompleter and Enable Live Autocompletion, and then click in the editor to close the configuration panel. This disables all autocompletion functionality.

Using governance-based data discovery

Hue can use the metadata tagging, indexing, and search features available in Apache Atlas data management. After integrating Hue with Atlas, classifications and indexed entities can be accessed and viewed in Hue. This topic shows you how to use metadata classifications in Hue.

Integration between Hue and Atlas is enabled by default, but if your administrator has disabled it, it must be re-enabled before you can use governance-based data discovery.

You can create tags to classify your data both from Atlas and Hue.

Searching metadata tags

The SQL Editor in Hue provides a search text box where you can search on the metadata tags or classifications that are associated with your databases, tables, and columns.

About this task


You can search for tags or classifications in either the Hive or the Impala editors.



Note: On clusters that use Apache Ranger for role-based access control, the Search mechanism does not display counts of popular values. Ranger ensures that Hue users can view only entities to which their user role (as configured and managed by Ranger) has been granted specific permissions.

Procedure

1. Go to Query Editor Impala or Hive.
2. To locate the tags or classifications in Apache Atlas, in the metadata search box located just to the right of the Query drop-down menu, type a tag: or classification: facet followed by its name. For example, type classification: wine as shown in the following image:

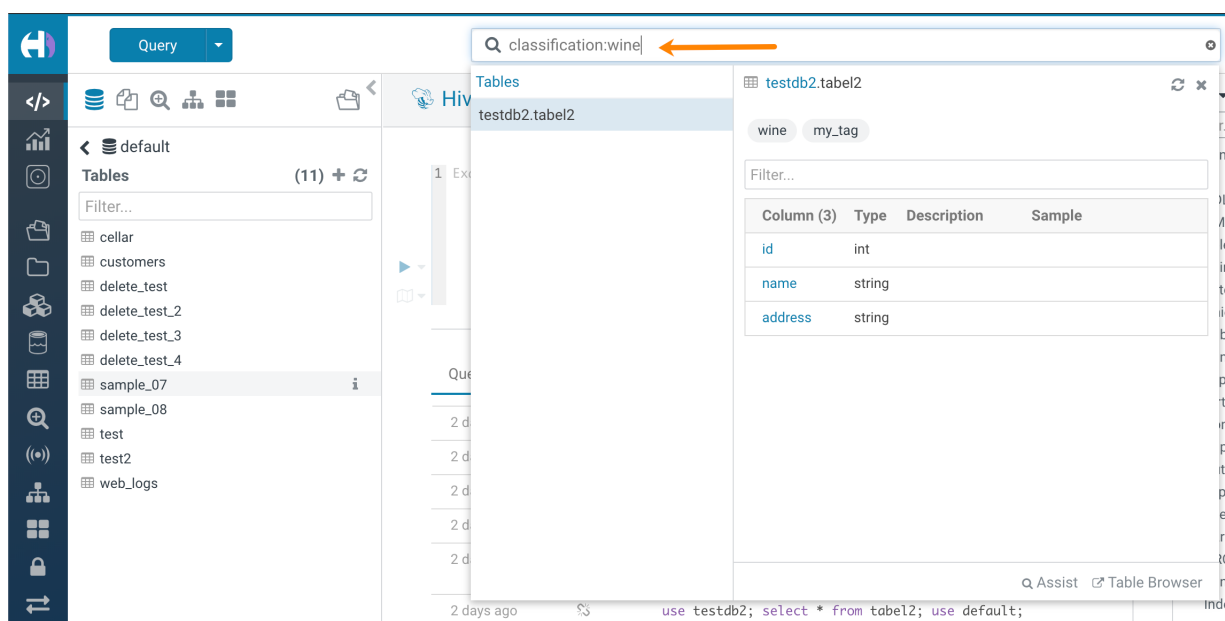

After you type the search facet and the tag or classification name in the search box, the `<DATABASE>.<TABLE>` where the tag or classification is found is returned. Click the `<DATABASE>.<TABLE>` to view the tags and classifications that have been defined for it.

Creating tables in Cloudera Data Explorer (Hue) by importing files

Using Hue Importer, you can create Hive, Impala, and Iceberg tables from CSV and XLSX files. After enabling the File Browser for your cloud provider, you can import the file into Hue to create tables.

About this task

You can upload and import a 200 KB file from your local computer, or import a file up to 3 GB from cloud storage (S3, ADLS Gen2, and Google Cloud Storage (GS) buckets) using the Importer.



Note: To enable uploading a small local file from your computer, you must go to Cloudera Manager Clusters Hue Configuration and add the following lines in the Hue Service Advanced Configuration Snippet (Safety Valve) for `hue_safety_valve.ini` field:

```
[indexer]
# Flag to turn on the direct upload of a small file.
enable_direct_upload=true
```

You can create managed and external tables. When you create managed tables, the data is moved to HDFS in the Cloudera Data Warehouse workspace. When you create external tables, your data remains in its original location.



Note: Superusers can browse all directories up to the root. Other users can only browse and access buckets and directories that they are granted access to.

Before you begin

- Enable user access to cloud storage buckets/containers in Ranger
- Enable the File Browser for your cloud provider

Procedure

1. Log in to the Hue web interface.

- Click Importer from the left-assist panel.

Alternatively, click **+** to create tables under the Databases Tables list view. This opens the Hue Importer.

- Under SOURCE, select Remote File from the Type drop-down menu.

- Click .. at the end of the Path field.

The **Choose a file** modal is displayed.

- (Non-RAZ deployment only) Click on your cloud provider, type the following depending on your cloud provider, and press enter:

(AWS): s3a://[***BUCKET-NAME***]

(Azure): abfs://[***CONTAINER-NAME***]

(GCS): gs://[***BUCKET-NAME***]

- Browse and select the file you want to use to create a table.

Hue displays the preview of the table along with the format.

Hue automatically detects the field separator, record separator, and the quote character from the file. If you want to override a specific setting, then you can change it by selecting a different value from the drop-down menu.

- Click Next.

The table destination and properties are displayed.

- Under Extras, deselect Store in Default location and Transaction table options.

This is required to create external tables.

- Select the Copy file option.

Selecting this option retains the source file in the original location and creates a copy of the file to create a table.

If you do not select this option, then Hue moves the file from the source location to a new folder, making it unavailable in the original location.

- Set the table destination, partitions, and change the column data types.

- Verify the settings and click Submit to create the table.

The CREATE TABLE query is triggered.

Hue displays the logs and opens the Table Browser from which you can view the newly created table when the operation completes successfully.

Supported non-ASCII and special characters in Cloudera Data Explorer (Hue)

Auto-generated files may often introduce non-alphanumeric characters in the file and directory names that Hue does not support. This might cause the files or directories to not appear on the Hue File Browser. Review the list of non-alphanumeric, non-ASCII, diacritics (accents) characters supported in Hue for the following operations: upload, create, list in folder, view, and rename.

Table 1: Supported characters on HDFS

Special character symbol	Description	Filename support	Folder name support
~	Tilde	Fully supported	Fully supported
@	Ampersat	Fully supported	Fully supported
\$	Dollar sign	Fully supported	Fully supported
&	Ampersand	Fully supported	Fully supported
(Left paranthesis	Fully supported	Fully supported
)	Right paranthesis	Fully supported	Fully supported
*	Asterisk	Fully supported	Fully supported

Special character symbol	Description	Filename support	Folder name support
!	Exclamation mark	Fully supported	Fully supported
+	Plus	Fully supported	Fully supported
=	Equal	Fully supported	Fully supported
;	Semicolon	Fully supported	Fully supported
,	Comma	Fully supported	Fully supported
.	Period	Fully supported	Fully supported
?	Question mark Not supported with Knox.	Fully supported	Fully supported
'	Apostrophe or single quote	Fully supported	Fully supported
T#####-ääö	Non-standard alphabets with diacritics and accents.	Fully supported	Fully supported
#	Hash	Partially supported. Not supported for rename operations.	Unsupported
/	Forward slash	Unsupported	Unsupported
\	Backslash	Unsupported	Unsupported
:	Colon	Unsupported	Unsupported

Table 2: Supported characters on S3

Special character symbol	Description	Filename support	Folder name support
(Left parenthesis	Fully supported	Fully supported
)	Right parenthesis	Fully supported	Fully supported
*	Asterisk	Fully supported	Fully supported
!	Exclamation mark	Fully supported	Fully supported
-	Hyphen	Fully supported	Fully supported
_	Underscore	Fully supported	Fully supported
.	Period	Fully supported	Fully supported
'	Apostrophe or single quote	Fully supported	Fully supported
T#####-ääö	Non-standard alphabets with diacritics and accents.	Fully supported	Fully supported
/	Forward slash	Partially supported	Partially supported
&	Ampersand	Partially supported	Partially supported
\$	Dollar sign	Partially supported	Partially supported
=	Equal	Partially supported	Partially supported
@	Ampersat	Partially supported	Partially supported
;	Semicolon	Partially supported	Partially supported
:	Colon	Partially supported	Partially supported
+	Plus	Partially supported. Not supported for create operations on RAZ-enabled environments.	Partially supported
,	Comma	Partially supported	Partially supported

Special character symbol	Description	Filename support	Folder name support
?	Question mark Not supported with Knox.	Partially supported	Partially supported. Not supported for list, upload, and view operations.
\	Backslash	Unsupported	Unsupported
{	Left brace	Unsupported	Unsupported
}	Right brace	Unsupported	Unsupported
^	Caret or circumflex	Unsupported	Unsupported
%	Percentage	Unsupported	Unsupported
~	Tilde	Unsupported	Unsupported
<	Less than sign	Unsupported	Unsupported
>	Greater than sign	Unsupported	Unsupported
#	Hash	Unsupported	Unsupported
"	Quotation mark	Unsupported	Unsupported
`	Grave accent or backtick	Unsupported	Unsupported
]	Right bracket	Unsupported	Unsupported
[Left bracket	Unsupported	Unsupported
	Vertical bar or pipe	Unsupported	Unsupported

Table 3: Supported characters on ABFS

Special character symbol	Description	Filename support	Folder name support
~	Tilde	Fully supported	Fully supported
@	Ampersat	Fully supported	Fully supported
#	Hash	Partially supported. Not supported for view and rename operations.	Unsupported
\$	Dollar sign	Fully supported	Fully supported
&	Ampersand	Fully supported	Fully supported
(Left paranthesis	Fully supported	Fully supported
)	Right paranthesis	Fully supported	Fully supported
*	Asterisk	Fully supported	Fully supported
!	Exclamation mark	Fully supported	Fully supported
+	Plus	Fully supported	Fully supported
=	Equal	Fully supported	Fully supported
:	Colon	Unsupported	Unsupported
;	Semicolon	Fully supported	Fully supported
,	Comma	Fully supported	Fully supported
.	Period	Fully supported	Fully supported
?	Question mark Not supported with Knox.	Partially supported. Not supported for view and rename operations.	Partially supported. Not supported for list, rename, and view operations.
/	Forward slash	Unsupported	Unsupported
\	Backslash	Unsupported	Unsupported
'	Apostrophe or single quote	Fully supported	Fully supported

Special character symbol	Description	Filename support	Folder name support
T#####-ääö	Non-standard alphabets with diacritics and accents.	Fully supported	Fully supported

Options to rerun Oozie workflows in Cloudera Data Explorer (Hue)

Oozie workflows consume time and resources to run. You can optimize the rerun of a failed Oozie workflow by selecting one of the following two options: “All or skip successful” or “Only failed”. These options enable you to select individual actions within your workflow that you want to rerun.



Important: The option to rerun the an Oozie workflow is enabled in the following conditions:

- In case of an external workflow, the rerun button is enabled if the workflow was run by the same user who is logged in, or if the user is a Hue superuser.
- If the workflow is created in Hue, then the rerun button is enabled only for the user who originally ran the workflow, or for the Hue superuser.

The All or skip successful option enables you to either rerun both the successful and failed actions or skip the actions that ran successfully and run only the failed ones. Using this option, you have more control over selecting the actions that you want to rerun from the list of successfully run actions.

If you select the All or skip successful option but do not select any or all of the successfully run actions, then Hue reruns the whole Oozie workflow.

If you select the All or skip successful option and select some of the successfully run actions, then Hue reruns the selected actions and the failed actions.

Select the Only failed option to only rerun the failed actions within your workflow.

The following image shows the available rerun options on the Hue web interface:

Creating Iceberg tables using Cloudera Data Explorer (Hue)

You can create Iceberg tables in Hue by using a CREATE TABLE statement or by importing CSV files using the Hue importer.

About this task



Attention: In the CDP Private Cloud Base 7.1.9 release, Iceberg table format is not supported with Hive. Creating Iceberg table in Hive by importing a CSV or using the CREATE TABLE statement is not supported. The following error is displayed when you try to create Iceberg table in Hive:

```
Error while compiling statement: FAILED: SemanticException Unrecognized
file format in STORED AS clause: 'ICEBERG'
```

Parquet is the only supported data file format for writing to Impala tables. For more information about the supported table formats, sample queries, and syntax, see the *Create table feature*. Following is a sample query to create an Iceberg table in Impala. You can run this query from the Impala editor in Hue:

```
CREATE TABLE ice_t2 (i int, s string, ts timestamp, d date)
STORED BY ICEBERG;
```


Alternatively, you can create an Iceberg table in Impala by importing a CSV file in Hue. You can either use an existing file present on your filesystem or upload a new file into Hue.



Note: When you create an Iceberg table in Impala by importing a CSV file in Hue, the table is created (re-written) in Parquet format. This is because Impala can write data and delete files only in the Parquet format. See [Using Impala with Iceberg Tables](#).

Procedure

1. Log in to the Hue web interface.
2. Select Impala as the SQL editor, and then click **+** on the left-assist panel as shown in the following image:

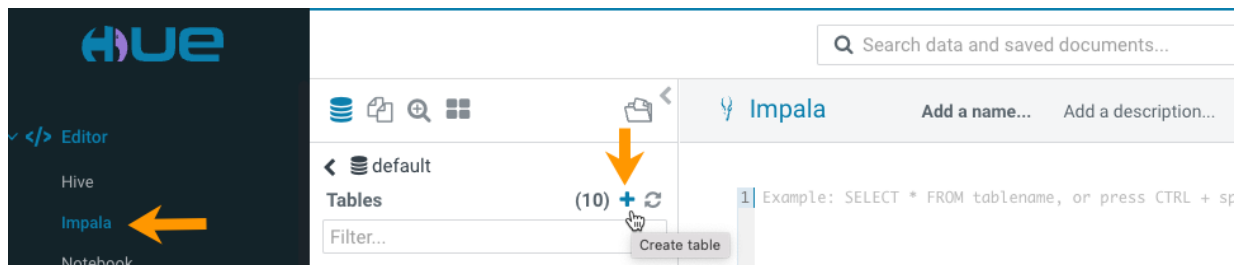

The **Import to table** page is displayed.



Attention: Do not navigate to Importer by clicking Importer on the left-most bar in the Hue web interface. By default, it creates a table in the select source, which could be Hive or Impala. The default source when you launch Hue is Hive. Because Iceberg with Hive is not supported, this can result into an error. Therefore, you must actively select Impala as the SQL engine before importing a file.

3. Select Remote File from the Type drop-down menu.
4. Click .. adjoining to the Path option.
The **Choose a file** modal is displayed.
5. Upload a CSV file or select an available file present on your filesystem.
Format and preview details are displayed.
At this point, you can select the characters that should be used for the field separator, record separator, and quotes.
6. Click Next.
7. Specify the type and name of your table under the DESTINATION section.
8. Expand the Extras section under the PROPERTIES section and select the Iceberg table option.
Verify other entries and make the necessary modifications.
9. Click Submit.
The CREATE TABLE query is submitted with your preferences.

Related Information

[Create table feature \(syntax and sample queries\)](#)

Unsupported features in Cloudera Data Explorer (Hue)

Learn about the Hue features that are not supported by Cloudera.

Unsupported options in Hue Importer

The following options are displayed on the Hue **Importer** page under `SOURCE Path` , but are not supported:

- External Database

Creating an external database using the Hue Importer is not supported. Cloudera recommends that you create a database using a SQL query.

- Manually

Known limitations in Cloudera Data Explorer (Hue)

Review the known limitations in Hue.

Hue has the following limitations:

- Node depth for graphing Oozie workflows because of performance issues. See [Improved Oozie Workflow display of large Graphs](#).
- You must use the Cloudera-provided Apache Load balancer to serve static content, because:
 - It serves static JavaScript, CSS, and Webpack files for client requests and reduces the load from the backend Python web server.
 - The Hue load balancer uses a sticky cookie session to route requests to the same backend as the Python web server, which talks to the same coordinator.
- Hue can only show logs from either Spark1 or Spark2, not both at a time.
- Spark notebook is not supported.
- External RDBMS in the query editor is not supported out of the box by default. Cloudera support will assist on a best-effort basis. Cloudera recommends that you raise issues in the [open-source github](#) community.
- Impala queries stay in the “executing” state so that Hue can display results when users are ready
- We need to limit the amount of data available to download from Hive/Impala because massive downloads cause performance degradation. Multiple simultaneous downloads of result sets could also degrade performance.
- Upstream features and connectors may not function properly in Cloudera. Cloudera recommends that you raise issues in the [open-source github](#) community.