

Cloudera Runtime 7.3.2

Using Hue

Date published: 2020-07-28

Date modified: 2026-03-31

CLOUDERA

<https://docs.cloudera.com/>

Legal Notice

© Cloudera Inc. 2026. All rights reserved.

The documentation is and contains Cloudera proprietary information protected by copyright and other intellectual property rights. No license under copyright or any other intellectual property right is granted herein.

Unless otherwise noted, scripts and sample code are licensed under the Apache License, Version 2.0.

Copyright information for Cloudera software may be found within the documentation accompanying each component in a particular release.

Cloudera software includes software from various open source or other third party projects, and may be released under the Apache Software License 2.0 (“ASLv2”), the Affero General Public License version 3 (AGPLv3), or other license terms. Other software included may be released under the terms of alternative open source licenses. Please review the license and notice files accompanying the software for additional licensing information.

Please visit the Cloudera software product page for more information on Cloudera software. For more information on Cloudera support services, please visit either the Support or Sales page. Feel free to contact us directly to discuss your specific needs.

Cloudera reserves the right to change any products at any time, and without notice. Cloudera assumes no responsibility nor liability arising from the use of products, except as expressly agreed to in writing by Cloudera.

Cloudera, Cloudera Altus, HUE, Impala, Cloudera Impala, and other Cloudera marks are registered or unregistered trademarks in the United States and other countries. All other trademarks are the property of their respective owners.

Disclaimer: EXCEPT AS EXPRESSLY PROVIDED IN A WRITTEN AGREEMENT WITH CLOUDERA, CLOUDERA DOES NOT MAKE NOR GIVE ANY REPRESENTATION, WARRANTY, NOR COVENANT OF ANY KIND, WHETHER EXPRESS OR IMPLIED, IN CONNECTION WITH CLOUDERA TECHNOLOGY OR RELATED SUPPORT PROVIDED IN CONNECTION THEREWITH. CLOUDERA DOES NOT WARRANT THAT CLOUDERA PRODUCTS NOR SOFTWARE WILL OPERATE UNINTERRUPTED NOR THAT IT WILL BE FREE FROM DEFECTS NOR ERRORS, THAT IT WILL PROTECT YOUR DATA FROM LOSS, CORRUPTION NOR UNAVAILABILITY, NOR THAT IT WILL MEET ALL OF CUSTOMER’S BUSINESS REQUIREMENTS. WITHOUT LIMITING THE FOREGOING, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, CLOUDERA EXPRESSLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, QUALITY, NON-INFRINGEMENT, TITLE, AND FITNESS FOR A PARTICULAR PURPOSE AND ANY REPRESENTATION, WARRANTY, OR COVENANT BASED ON COURSE OF DEALING OR USAGE IN TRADE.

Contents

About using Cloudera Data Explorer (Hue).....	4
Accessing and using Cloudera Data Explorer (Hue).....	4
Viewing Hive query details.....	10
Viewing Hive query history.....	10
Viewing Hive query information.....	10
Viewing explain plan for a Hive query.....	11
Viewing Hive query timeline.....	12
Viewing configurations for a Hive query.....	12
Viewing DAG information for a Hive query.....	14
Viewing Impala query details.....	17
Viewing Impala query history.....	17
Viewing Impala query information.....	18
Viewing the Impala query execution plan.....	18
Viewing the Impala query metrics.....	19
Viewing Impala profiles in Cloudera Data Explorer (Hue).....	20
Terminating Hive queries.....	20
Comparing Hive and Impala queries in Cloudera Data Explorer (Hue).....	21
Start SQL AI Assistant.....	23
Generate SQL from NQL.....	23
Edit query in natural language.....	24
Explain query in natural language.....	24
Optimize SQL query.....	27
Fixing a query in Cloudera Data Explorer (Hue).....	28
Generate comment for a SQL query.....	28
Enable stored procedures in Hue.....	29
Run stored procedure from Hue.....	30
Using SQL to query HBase from Cloudera Data Explorer (Hue).....	31
Querying existing HBase tables.....	32
Enabling the SQL editor autocompleter.....	32
Rerunning a query from the Job Browser page.....	33
Using governance-based data discovery.....	33
Searching metadata tags.....	34
Using Amazon S3 with Cloudera Data Explorer (Hue).....	34
Enabling S3 browser for Cloudera Data Explorer (Hue) configured with IDBroker.....	35
Enabling S3 browser for Cloudera Data Explorer (Hue) configured without IDBroker.....	36
Enabling S3 File Browser for Cloudera Data Explorer (Hue) with RAZ in DataHub.....	36
Using Azure Data Lake Storage Gen2 with Cloudera Data Explorer (Hue).....	38
Enabling ABFS file browser for Cloudera Data Explorer (Hue) configured with IDBroker.....	38
Enabling ABFS File Browser in Cloudera Data Explorer (Hue) with RAZ in DataHub.....	39
Using Amazon S3-compatible object stores with Data Explorer.....	41
Enabling AWS S3 compatible Object Stores in Cloudera Data Explorer (Hue) without RAZ.....	41
Using Google Cloud Storage with Cloudera Data Explorer (Hue).....	42
Prerequisites for enabling GS File Browser.....	42
Enabling GS File Browser with RAZ.....	42
Disabling the automatic creation of user home directories.....	43
Granting permission to access S3, ABFS, GS File Browser in Cloudera Data Explorer (Hue).....	44
Creating tables in Cloudera Data Explorer (Hue) by importing files.....	44
Supported non-ASCII and special characters in Cloudera Data Explorer (Hue).....	46
Options to rerun Oozie workflows in Cloudera Data Explorer (Hue).....	48
Unsupported features in Cloudera Data Explorer (Hue).....	49
Known limitations in Cloudera Data Explorer (Hue).....	49

About using Cloudera Data Explorer (Hue)

Hue provides a one-stop querying experience in Cloudera that leverages Hive and Impala SQL queries.

Accessing and using Cloudera Data Explorer (Hue)

Get started using Hue by analyzing and visualizing your data with Impala and Hive SQL query engines.


About this task

To try Hue without having an account, try running sample queries on <http://demo.gethue.com/>.

Procedure


1. Download and unzip [one year of bike trips](#) from the Bay Area Bike Share program. This file is about 80 MB in size.

2. Create a table from the `~/babs_open_data_year_1/201402_babs_open_data/201402_trip_data.csv` file found in the unzipped `babs_open_data_year_1.zip` file:
 - a) In the Cloudera Manager, select Hue WebUI Hue Load Balanced to launch Hue.
 - b) In the left navigation panel of Hue, make sure the default database is selected, and click the plus sign to create a table as shown in the following image:

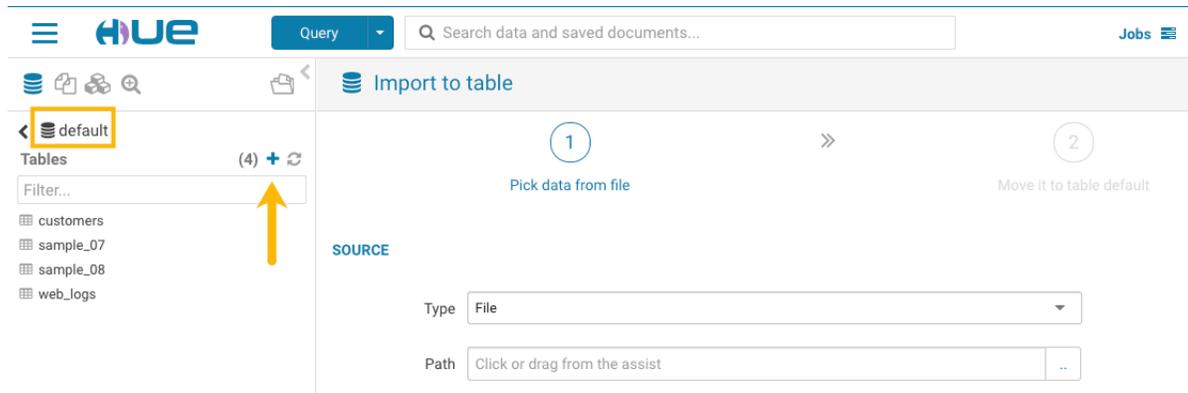

If the default database is not selected, click the "less than" icon  that is next to the database icon in the left panel. This enables you to select the default database.

- c) In the center panel Importer UI, set Type to File.
- d) Drag the `201402_trip_data.csv` file to the Path field as shown in the following image:

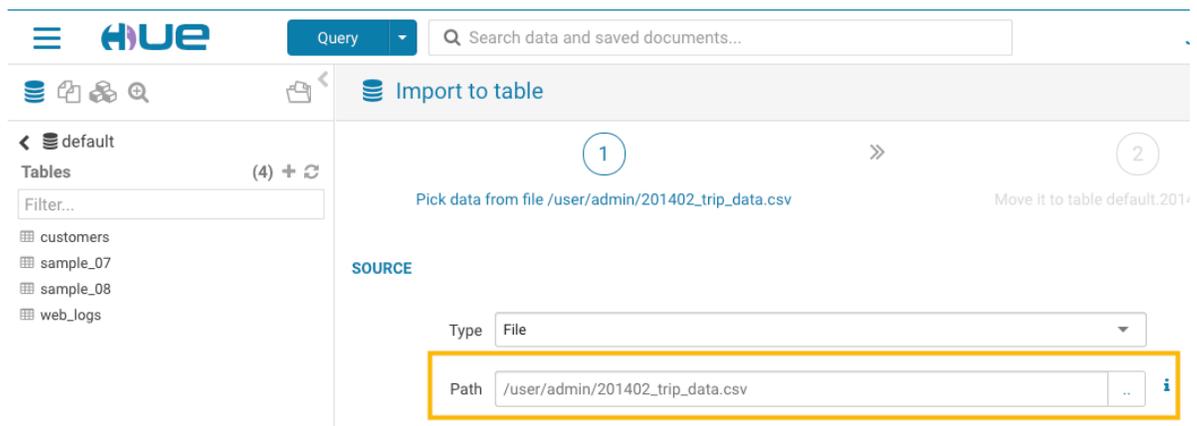

- e) Set the formats as follows:
 - Field Separator = Comma (,)
 - Record Separator = New line
 - Quote Character = Double Quote

Then click Next at the bottom of the page.

- f) Set the properties Format = Text.
- g) Edit the FIELDS as follows:
 - Rename Bike # to Bike ID
 - Change the data type of ZipCode to string.
 - Remove all of the spaces in the Name fields.

Then click Submit at the bottom of the page.

3. Click Query at the top of the page and select Editor Hive to open the Hive editor and then create a query.


- Enter the following query into the editor window:

```
SELECT * FROM default.201402_trip_data
LIMIT 10;
```

Click the execute icon  to run the query. The following rows are returned:

	Query History	Saved Queries	Results (10)																																																						
			<table><thead><tr><th></th><th>201402_trip_data.tripid</th><th>201402_trip_data.duration</th><th>201402_trip_data</th></tr></thead><tbody><tr><td></td><td>1</td><td>4576</td><td>63</td><td>8/29/2013 14:13</td></tr><tr><td></td><td>2</td><td>4607</td><td>70</td><td>8/29/2013 14:42</td></tr><tr><td></td><td>3</td><td>4130</td><td>71</td><td>8/29/2013 10:16</td></tr><tr><td></td><td>4</td><td>4251</td><td>77</td><td>8/29/2013 11:29</td></tr><tr><td></td><td>5</td><td>4299</td><td>83</td><td>8/29/2013 12:02</td></tr><tr><td></td><td>6</td><td>4927</td><td>103</td><td>8/29/2013 18:54</td></tr><tr><td></td><td>7</td><td>4500</td><td>109</td><td>8/29/2013 13:25</td></tr><tr><td></td><td>8</td><td>4563</td><td>111</td><td>8/29/2013 14:02</td></tr><tr><td></td><td>9</td><td>4760</td><td>113</td><td>8/29/2013 17:01</td></tr><tr><td></td><td>10</td><td>4258</td><td>114</td><td>8/29/2013 11:33</td></tr></tbody></table>		201402_trip_data.tripid	201402_trip_data.duration	201402_trip_data		1	4576	63	8/29/2013 14:13		2	4607	70	8/29/2013 14:42		3	4130	71	8/29/2013 10:16		4	4251	77	8/29/2013 11:29		5	4299	83	8/29/2013 12:02		6	4927	103	8/29/2013 18:54		7	4500	109	8/29/2013 13:25		8	4563	111	8/29/2013 14:02		9	4760	113	8/29/2013 17:01		10	4258	114	8/29/2013 11:33
	201402_trip_data.tripid	201402_trip_data.duration	201402_trip_data																																																						
	1	4576	63	8/29/2013 14:13																																																					
	2	4607	70	8/29/2013 14:42																																																					
	3	4130	71	8/29/2013 10:16																																																					
	4	4251	77	8/29/2013 11:29																																																					
	5	4299	83	8/29/2013 12:02																																																					
	6	4927	103	8/29/2013 18:54																																																					
	7	4500	109	8/29/2013 13:25																																																					
	8	4563	111	8/29/2013 14:02																																																					
	9	4760	113	8/29/2013 17:01																																																					
	10	4258	114	8/29/2013 11:33																																																					

4. Click Query at the top of the page and select Editor Impala to open the Impala SQL editor and then create a query.
 - a. In the left panel, click the refresh icon and select Perform incremental metadata update to make the new table visible to Impala:

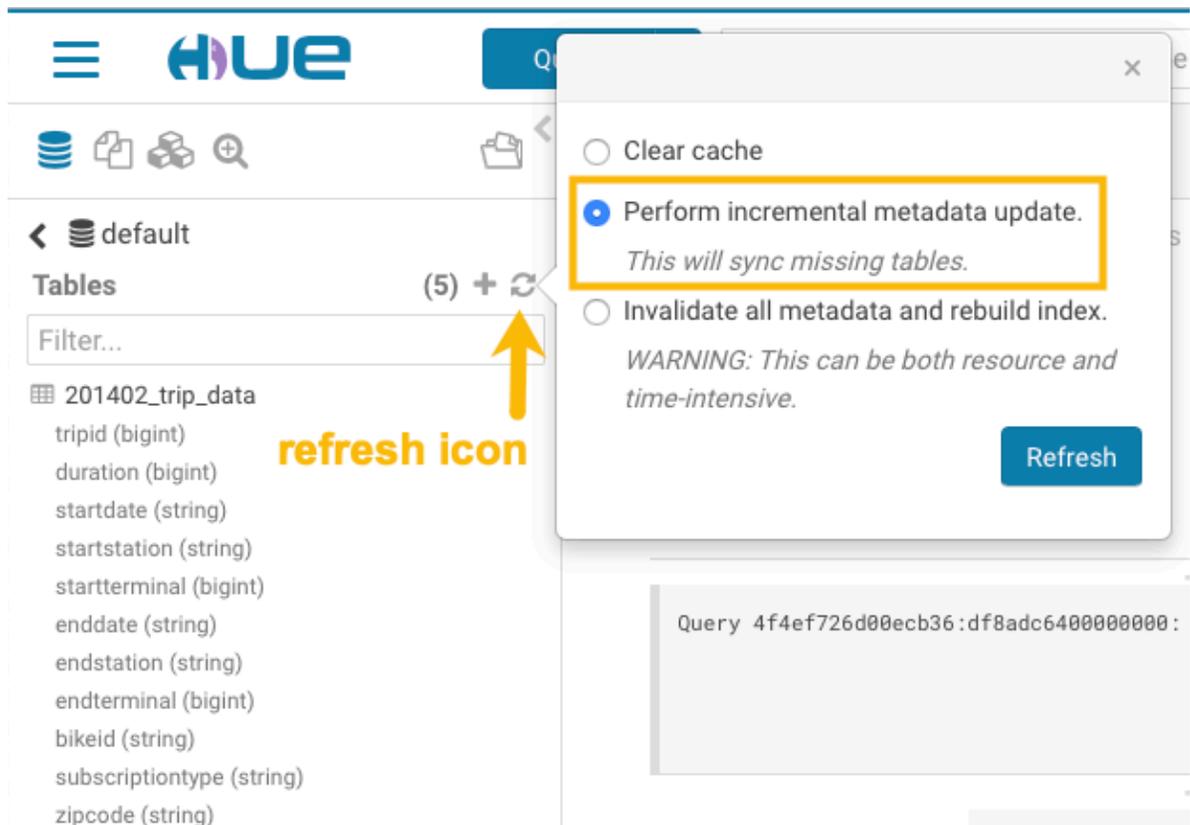

The screenshot shows the Hue interface with a modal dialog box open. The dialog box has three radio button options: 'Clear cache', 'Perform incremental metadata update.', and 'Invalidate all metadata and rebuild index.'. The 'Perform incremental metadata update.' option is selected and highlighted with a yellow box. Below this option is the text 'This will sync missing tables.'. The 'Invalidate all metadata and rebuild index.' option has a warning below it: 'WARNING: This can be both resource and time-intensive.'. A 'Refresh' button is at the bottom right of the dialog. In the background, the left panel shows a table list with a refresh icon (a circular arrow) and a yellow arrow pointing to it with the text 'refresh icon'.

- b. Enter the following query into the editor window:

```
select 'startstation', 'endstation', count(*) as trips from default.'201402_trip_data'
group by 'startstation', 'endstation' order by trips desc;
```

- c. Click the down arrow just under the execution icon and select Format:

The screenshot shows the Hue Impala interface. On the left, a sidebar lists tables: 201402_trip_data, customers, sample_07, sample_08, and web_logs. The main area displays a SQL query:


```
1 select `startstation`, `endstation`, count(*) as trips from
2 default.`201402_trip_data` group by `startstation`, `endstation`
3 order by trips desc;
```

 Below the query, a dropdown menu is open, showing options: Explain, Format (highlighted with a blue bar and a yellow arrow), and Clear. Another yellow arrow points to the dropdown arrow icon above the menu. The results area shows a single row with a long ID: 6448b4d4ca3522f3:831e263800000000.

This reformats the query:

The screenshot shows the Hue Impala interface with the same SQL query reformatted:


```
1 SELECT `startstation`,
2       `endstation`,
3       count(*) AS trips
4 FROM default.`201402_trip_data`
5 GROUP BY `startstation`,
6          `endstation`
7 ORDER BY trips DESC;
```

 A yellow arrow points to the reformatted query text, which is labeled "reformatted query". The interface elements (sidebar, top bar) are consistent with the previous screenshot.

- d.

Click the save icon , enter a query name, and click Save.

- e.

Click the execute icon  to run the query.

5. Create a bar chart that is based on the query results:

a.



Click the chart icon and then select Bars.

Impala 0.66s Database default Type text

```

1 SELECT `startstation`,
2        `endstation`,
3        count(*) AS trips
4 FROM default.`201402_trip_data`
5 GROUP BY `startstation`,
6          `endstation`
7 ORDER BY trips DESC;
    
```

Query 4142ddc7e9c4b8ad:4af0d8b600000000: 0% Complete (0 out of 1) [4142ddc7e9c4b8ad:4af0d8b600000000](#)

Query History Saved Queries Results (1,024+)

	startstation	endstation
1	Harry Bridges Plaza (Ferry Building)	Embarcadero at Sansome
2	Townsend at 7th	San Francisco Caltrain (Townsend at 4th)
3	San Francisco Caltrain 2 (330 Townsend)	Townsend at 7th
4	Market at Sansome	2nd at South Park
5	Embarcadero at Sansome	Steuart at Market
6	2nd at South Park	Market at Sansome
7	San Francisco Caltrain (Townsend at 4th)	Harry Bridges Plaza (Ferry Building)
8	2nd at Townsend	Harry Bridges Plaza (Ferry Building)

COLUMNS (4)

- startstation string
- endstation string
- trips bigint

Chart Type Selection:

- Bars
- Pie
- Scatter
- Marker Map
- Gradient Map

b. Set the bar chart elements as follows:

- X-AXIS = startstation
- Y-AXIS = trips
- LIMIT = 10

TYPE: Bars


X-AXIS: startstation

Y-AXIS: trips

GROUP: Choose a column to pivo...

LIMIT: 10

SORTING: [Bar Chart Icon]

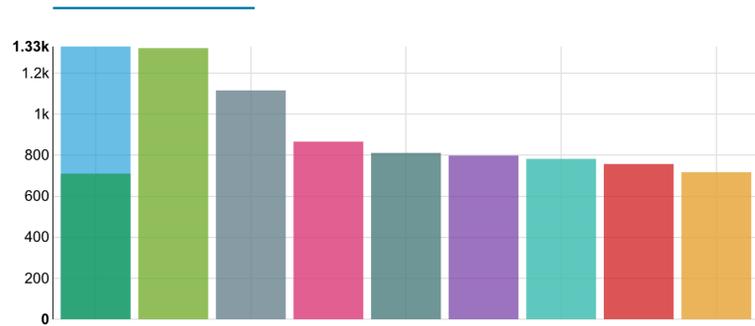

6.



Create a pie chart by clicking the chart icon again and then select Pie.

7.

Download the query results by clicking  and selecting in what format you want to download, copy, or export the results.

Viewing Hive query details

You can search Hive query history, compare two queries, download debug bundles for troubleshooting, and view query details, a graphical representation of the query execution plan, and DAG information on the Job Browser page in Hue.

Viewing Hive query history

The Queries tab on the Job Browser page in Hue displays all the queries that were run from various query interfaces, such as Beeline, Hive Warehouse Connector (HWC), Tableau, Hue, and other JDBC BI clients and tools.

About this task

Only Query Processor Administrators can view historical queries of all users to monitor resource utilization and control costs from the Hue Job Browser. Non-admin users can view only their queries.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Click Queries.

The Hive queries that were run for the past seven days are displayed. You can select the time period for which you want to view the historical data.

You can also filter queries by their status.

Related Information

[Adding Query Store Administrator users on Cloudera Data Hub clusters](#)

Viewing Hive query information

The Query Info tab provides information such as, the Hive query ID, the user who executed the query, the start time, the end time, the total time taken to execute the query, the tables that were read and written, application ID, Directed Acyclic Graph (DAG) IDs, session ID, LLAP app ID, thread ID, and the queue against which the query was run.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.

- Go to the **Queries** tab and click on the query for which you want to view the query details.

The following image shows the **Query Info** tab on the Hue web interface:

The screenshot displays the Hue web interface with the 'Job Browser' header and 'Jobs' and 'Queries' tabs. The 'Queries' tab is active, showing a table with columns for QUERY ID, USER, and STATUS. The first row shows a query ID, a user, and a 'SUCCESS' status. Below the table, the 'Query Info' tab is selected, displaying the query text on the left and various execution details on the right.

QUERY ID	USER	STATUS
hive_20220509083516_a9d00c94-657a-4d80-9cc2-51851ec711eb		✓ SUCCESS

Query Info tab details:

```

QUERY
SELECT
*
FROM
customer
WHERE
c_nationkey = 15

```

Execution Details:

- START TIME: 3 minutes ago
- END TIME: 2 minutes ago
- DURATION: 50s
- TABLES READ: customer (default)
- TABLES WRITTEN: -
- APPLICATION ID: application_1652085158072_0001
- DAG ID: dag_1652085158072_0001_2
- SESSION ID: 76e59bed-40e6-4387-8c35-52606ecacaf4
- LLAP APP ID: -
- THREAD ID: HiveServer2-Background-Pool: Thread-297
- QUEUE: None

Viewing explain plan for a Hive query

The Visual Explain feature provides a graphical representation of the query execution plan. The Explain plan is read from right to left. It provides details about every stage of query execution.

Procedure

- Log in to the Hue web interface.
- Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
- Go to the **Queries** tab and click on the query for which you want to view the query details.

4. Click on Visual Explain.

The following image shows the **Visual Explain** tab on the Hue web interface:



5. (Optional) Click to download the query explain plan in JSON format.

Viewing Hive query timeline

The Timeline tab provides a visual representation of Hive performance logs and shows the time taken by each stage of the query execution.

About this task

Following are the stages in which a query is executed:

- Pre-execution and DAG construction: It is the first phase of query execution and is executed on the Hive engine. It constitutes the time taken to compile, parse, and build the Directed Acyclic Graph (DAG) for the next phase of the query execution.
- DAG submission: It is the second phase in which the DAG that was generated in Hive is submitted to the Tez engine for execution.
- DAG runtime: It shows the time taken by the Tez engine to execute the DAG.
- Post-execution: It is the last phase of query execution in which the files in S3/ABFS are moved or renamed.

Duration data about each phase are distilled into more granular metrics based on query execution logs.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab and click on the query for which you want to view the query details.
4. Click on Timeline.

The following image shows the **Timeline** tab on the Hue web interface:



Viewing configurations for a Hive query

The Query Config tab provides the configuration properties and settings that are used in a Hive query. You can use this tab to verify that configuration property values align with your expectations.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab and click on the query for which you want to view the query details.
4. Click on Query Config.

The following image shows the **Query Config** tab on the Hue web interface:

Config Name	Config Value
hadoop.security.group.mapping.ldap.posix.attr...	uidNumber
dfs.block.invalidate.limit	1000
yarn.admin.acl	*
hive.repl.dump.metadata.only.for.external.table	true
hive.exec.stagingdir	.hive-staging
hive.druid.rollup	true
yarn.federation.enabled	false
yarn.app.mapreduce.am.job.committer.cancel...	60000
hive.druid.broker.address.default	localhost:8082
dfs.disk.balancer.max.disk.throughputInMBper...	10
dfs.qjournal.select-input-streams.timeout.ms	20000
hive.llap.io.orc.time.counters	true
hive.repl.retain.prev.dump.dir	false
hive.vectorized.execution.mapjoin.native.fast...	true
dfs.provided.aliasmap.inmemory.leveldb.dir	/tmp
yarn.nodemanager.process-kill-wait.ms	5000
yarn.minicluster.use-rpc	false
io.map.index.interval	128

Viewing DAG information for a Hive query

Directed Acyclic Graph (DAG) is created by the Hive engine every time you query the Hive Virtual Warehouse. The Hive SQL queries are compiled and converted into a Tez execution graph also known as a DAG. DAG is a collection of vertices where each vertex executes a fragment of the query or script. Hue provides a web interface to view detailed information about DAGs.

About this task

Directed connections between vertices determine the order in which they are executed. For example, the vertex to read a table must be run before a filter can be applied to the rows of that table. As another example, consider a vertex that reads a user table that is very large and distributed across multiple computers and multiple racks. Reading the table is achieved by running many tasks in parallel.



Important: The DAG information tabs (**DAG Info**, **DAG Flow**, **DAG Swimlane**, **DAG Counters**, **DAG Configurations**) are displayed only if the Tez engine is used for query execution. The Tez engine is typically utilized for complex queries.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab and click on the query for which you want to view the query details.
4. Click DAG Info to see the DAG ID, DAG name, the status of the query, the time taken to execute the DAG, start time, and end time.

The following image shows the **DAG Info** tab on the Hue web interface:

The screenshot shows the Hue web interface with the DAG Info tab selected. The query details are as follows:

QUERY ID	USER	STATUS
hive_20220509083516_a9d00c94-657a-4d80-9cc2-51851ec711eb	[REDACTED]	✓ SUCCESS

Navigation tabs: Query Info, Visual Explain, Timeline, Query Config, **DAG Info**, DAG Flow, DAG Swimlane, DAG Counters, DAG Configurations

DAG ID	DAG NAME
dag_1652085158072_0001_2	SELECT * FROM customer WHERE c_nationke...15 (Stage-1)
STATUS	DURATION
SUCCEEDED	00:00:50
START TIME	END TIME
3 minutes ago	2 minutes ago


The following table lists and describes the status of the Tez job:

Status	Description
Submitted	The DAG is submitted to Tez but is not running
Running	The DAG is currently running
Succeeded	The DAG was completed successfully
Failed	The DAG failed to complete successfully
Killed	The DAG was stopped manually
Error	An internal error occurred when executing the DAG

5. Click DAG Flow to see the DAG in the form of a flowchart.

You can gain insight into the complexity and the progress of executing jobs, and investigate the vertices that have failures or are taking a long time to complete.

The following image shows the **DAG Flow** tab on the Hue web interface::

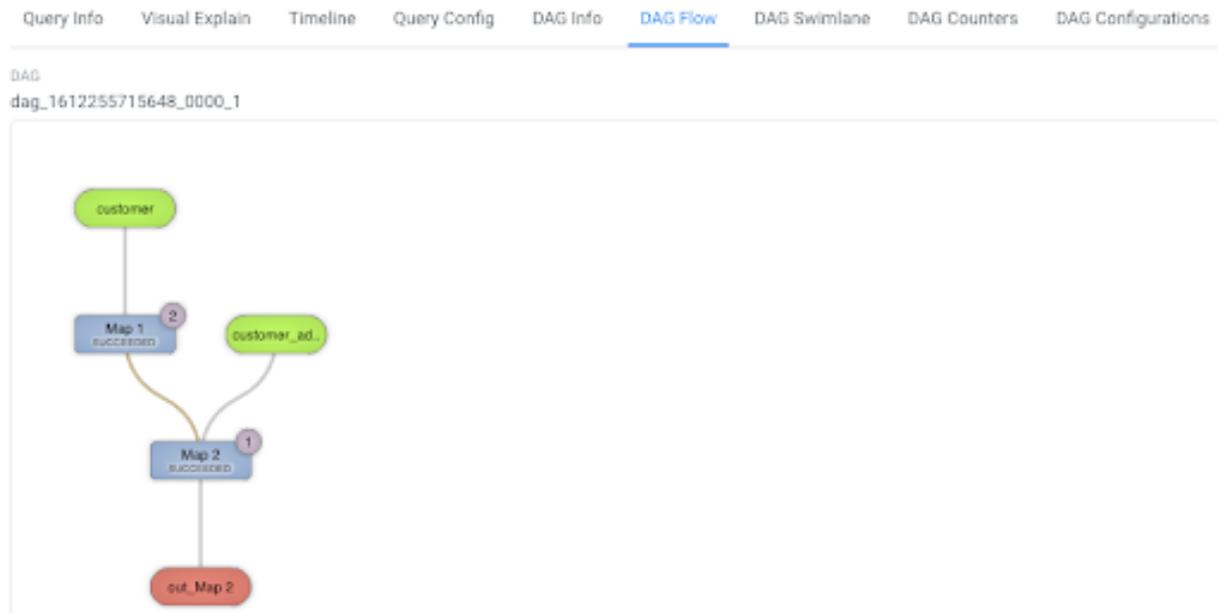

Here, the input to vertices Map 1 and Map 2 are the tables displayed in green boxes. Next, Map 2 depends on the result set generated by Map 1. Map 2 is the last vertex in the DAG flow and after it completes its execution, the query output is written to a file in a filesystem such as S3 or ABFS.

There are a few options to change the layout of the DAG flow. You can hide the input and the output nodes to view only the task vertices by clicking the Toggle source/sink visibility button. You can switch between the horizontal and vertical orientation by clicking the Toggle orientation button.

6. Click DAG Swimlane to see the DAG of the vertices against time.

Each mapping and reducing task is a vertex. Each horizontal bar of the swimlane represents the total time taken by the vertex to complete the execution. The vertical lines indicate the time when the vertex was initialized, the time when the vertex started, the time when the first task started, the time when the last task was completed, and the time when the vertex finished its execution. When you mouse over the vertical line, the bubble displays the stage of the vertex execution and provides a timestamp. The vertical lines connecting two vertices denote the dependency of a vertex on another vertex.

The following image shows the **DAG Swimlane** tab on the Hue web interface:



In this example, Map 1 depends on the results of Map 5. Map 1 will finish its execution only when Map 5 finishes its execution successfully. Similarly, Reducer 2 depends on Map 1 to complete its execution.

The consolidated timeline shows the percentage of time each vertex took to complete executing.

7. Click DAG Counters to see details such as the number of bytes read and written, number of tasks that initiated and ran successfully, amount of CPU and memory consumed, and so on.

The **DAG Counters** tab provides a way to measure the progress or the number of operations that occur within a generated DAG. Counters are used to gather statistics for quality control purposes or problem diagnosis.

The following image shows the **DAG Counters** tab on the Hue web interface:

Query Info	Visual Explain	Timeline	Query Config	DAG Info	DAG Flow	DAG Swimlane	DAG Counters	DAG Configurations
Group Name			Counter Name		DAG : dag_1652085158072_0001_2			
org.apache.tez.common.counters.DAGCounter			NUM_SUCCEEDED_TASKS		54			
org.apache.tez.common.counters.DAGCounter			TOTAL_LAUNCHED_TASKS		54			
org.apache.tez.common.counters.DAGCounter			DATA_LOCAL_TASKS		54			
org.apache.tez.common.counters.DAGCounter			AM_CPU_MILLISECONDS		5890			
org.apache.tez.common.counters.DAGCounter			AM_GC_TIME_MILLIS		22			
org.apache.tez.common.counters.FileSystem...			FILE_BYTES_WRITTEN		1074416910			
org.apache.tez.common.counters.FileSystem...			S3A_BYTES_READ		6742239795			
org.apache.tez.common.counters.FileSystem...			S3A_READ_OPS		1124			
org.apache.tez.common.counters.TaskCounter			TASK_DURATION_MILLIS		759357			
org.apache.tez.common.counters.TaskCounter			INPUT_RECORDS_PROCESSED		146519			
org.apache.tez.common.counters.TaskCounter			INPUT_SPLIT_LENGTH_BYTES		12387638515			
HIVE			CREATED_FILES		36			
HIVE			RECORDS_IN_Map_1		15000000			
HIVE			RECORDS_OUT_0		6003115			
HIVE			RECORDS_OUT_OPERATOR_FIL_5		6003115			
HIVE			RECORDS_OUT_OPERATOR_FS_7		6003115			
HIVE			RECORDS_OUT_OPERATOR_SEL_6		6003115			
HIVE			RECORDS_OUT_OPERATOR_TS_0		15000000			

- Click DAG Configurations to see the Tez configuration details for a query that has a DAG associated with it.

The following image shows the **DAG Configurations** tab on the Hue web interface:

Config Name	DAG : dag_1612255715648_0000_1
dfs.namenode.fs-limits.max-xattrs-per-inode	32
dfs.namenode.delegation.token.always-use	false
yam.nodemanager.runtime.linux.docker.delaye..	false
yam.timeline-service.handler-thread-count	10
yam.timeline-service.webapp.rest-csrf.custom..	X-XSRF-Header
fs.s3a.retry-limit	7
dfs.client.write.byte-array-manager.count-reset..	10000
yam.nodemanager.linux-container-executor.cg..	/hadoop-yam
mapreduce.shuffle.connection-keep-alive.time..	5
mapreduce.client.libjars.wildcard	true
hive.zookeeper.kerberos.enabled	false

Viewing Impala query details

You can view Impala query details, query plan, execution summary, and query metrics on the new Impala Queries tab on the Job Browser page in Hue, and use this information to tune and optimize your queries. You can also view Impala query profiles on the Impala tab.

Viewing Impala query history

The Impala Queries tab on the Job Browser page in Hue displays all the queries that were run from various query interfaces, such as Impala-shell, Impyla, Hue, and other JDBC BI clients and tools.

About this task

Only Query Processor Administrators can view historical queries of all users to access history of queries run in that Impala Virtual Warehouse from the Hue Job Browser. Non-admin users can only view only their own queries.

Procedure

- Log in to the Hue web interface.
- Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
- Click Queries.

The Impala queries that were run for the past seven days are displayed. You can select the time period for which you want to view the historical data.

You can also search using the query ID, sort queries by various parameters such as duration, peak memory, and so on, and filter queries by their status.

Related Information

[Adding Query Store Administrator users on Cloudera Data Hub](#)

Viewing Impala query information

The Query Info tab in Hue provides information such as, the Impala query ID, the user who executed the query, the start time, the end time, the total time taken to execute the query, the coordinator that received the query, CPU time, rows produced, peak memory, and HDFS bytes read.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Impala Queries** tab and click on the query for which you want to view the query details.

The following image shows the **Query Info** tab on the Hue web interface:

The screenshot displays the Hue web interface with the 'Impala Queries' tab selected. The 'Query Info' sub-tab is active, showing the following details:

QUERY ID	USER	STATUS
e140b4f4dff9c2d5:cf78c8f400000000	admin	✓ FINISHED

Below this, the 'Query Info' section is divided into two columns:

- Query Text:**

```

QUERY
SELECT
*
FROM
`DEFAULT`.`sample_08`
LIMIT
105

```
- Query Metrics:**
 - START TIME: 2 days ago
 - END TIME: 2 days ago
 - DURATION: 3s
 - QUERY TYPE: QUERY
 - USER NAME: admin
 - COORDINATOR: sree-test2-1.sree-test2.root.hwx.site:27000
 - CPU TIME: 1ms
 - ROWS PRODUCED: 105
 - PEAK MEMORY: 4 MB
 - HDFS BYTES READ: 93.9 KB

Viewing the Impala query execution plan

The query execution plan in Hue provides details on how the query will be executed, the operators involved, and other information before the query is submitted to the Impala engine.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.

- Go to the **Impala Queries** tab and click on the query for which you want to view the execution plan.

The following image shows the **Plan** tab on the Hue web interface:

Job Browser Jobs Impala Hive Workflows Schedules Bundles SLAs Impala Queries Refresh

< Queries

QUERY ID	USER	STATUS
e140b4f4dff9c2d5cf78c8f400000000	admin	✓ FINISHED

Query Info **Plan** Exec Summary Metrics

```

-----
Max Per-Host Resource Reservation: Memory=4.06MB Threads=3
Per-Host Resource Estimates: Memory=68MB
Codegen disabled by planner
WARNING: The following tables are missing relevant table and/or column statistics.
default.sample_08
Analyzed query: SELECT * FROM `default`.sample_08 LIMIT CAST(105 AS TINYINT)

F01:PLAN FRAGMENT [UNPARTITIONED] hosts=1 instances=1
| Per-Host Resources: mem-estimate=4.02MB mem-reservation=4.00MB thread-reservation=1
PLAN-ROOT SINK
| output exprs: default.sample_08.code, default.sample_08.description, default.sample_08.total_emp, default.sample_08.salary
| mem-estimate=4.00MB mem-reservation=4.00MB spill-buffer=2.00MB thread-reservation=0
|
01:EXCHANGE [UNPARTITIONED]
| limit: 105
| mem-estimate=16.00KB mem-reservation=0B thread-reservation=0
| tuple-ids=0 row-size=32B cardinality=105
| in pipelines: 00(GETNEXT)
|
F00:PLAN FRAGMENT [RANDOM] hosts=1 instances=1
Per-Host Resources: mem-estimate=64.00MB mem-reservation=64.00KB thread-reservation=2
00:SCAN HDFS [default.sample_08, RANDOM]
HDFS partitions=1/1 files=1 size=47.40KB
stored statistics:
  table: rows=823 size=47.40KB
  
```

Viewing the Impala query metrics

You can view detailed, aggregated metrics for various counters such as `hdfs_bytes_read`, `memory_per_node_peak`, `thread_cpu_time`, and so on, on the Metrics tab in Hue.

Procedure

- Log in to the Hue web interface.
- Click Jobs from the left assist panel.
The **Job Browser** page is displayed.

- Go to the **Impala Queries** tab and click on the query for which you want to view the query metrics.

The following image shows the **Metrics** tab on the Hue web interface:

Group Name	Counter Name	Metrics : e140b4f4dff9c2d5.cf78c8f400000000
HDFS Metrics	hdfs_bytes_read	96126
HDFS Metrics	hdfs_bytes_read_local	96126
HDFS Metrics	hdfs_bytes_read_local_percentage	100
HDFS Metrics	hdfs_bytes_read_remote	0
HDFS Metrics	hdfs_bytes_read_remote_percentage	0
HDFS Metrics	hdfs_bytes_read_short_circuit	96126
HDFS Metrics	hdfs_bytes_read_short_circuit_percentage	100
HDFS Metrics	hdfs_bytes_read_from_cache	0
HDFS Metrics	hdfs_bytes_read_from_cache_percentage	0
HDFS Metrics	hdfs_average_scan_range	96126.0
Memory Metrics	memory_per_node_peak	4225761.28
Memory Metrics	memory_per_node_peak_node	sree-test2-1.sree-test2.root.hwx.site:27000

Viewing Impala profiles in Cloudera Data Explorer (Hue)

When Impala executes any query, it captures the runtime details of the execution in a query profile. You can now view the Impala query profile from Hue's Job Browser page.

About this task

Query Processor Administrators can view query details of all users unlike the non-admin users who can view query details only for their queries. This enables the Query Processor Administrators to provide a comprehensive report on past queries and running queries.

Procedure

- Go to the Cloudera Data Warehouse web interface and open Hue from your Impala Virtual Warehouse.
- Click Jobs on the left-assist panel to go to the **Job Browser** page and then click on the Impala tab.
- Click on the query for which you want to view the Impala query profile.

The query execution details are displayed.

- Click on the Profile tab.

Terminating Hive queries

If a query is running for longer than expected, or you have accidentally triggered it, then you can stop the query to free up the resources. Hue also allows you to stop multiple queries at once.

About this task



Note: This feature is available only for Hive queries. Only admin users or Hue superusers can stop running queries.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab.
A list of queries that were run is displayed.
4. Select the queries that you want to stop and click Kill.

Comparing Hive and Impala queries in Cloudera Data Explorer (Hue)

You can compare two queries to know how each query is performing in terms of speed and cost-effectiveness. Hue compares various aspects of the two queries, based on which you can identify what changed between the executions of those two queries, and you can debug performance-related issues between different runs of the same query.

About this task

The query comparison report provides you a detailed side-by-side comparison of your queries.

For Hive queries, it includes recommendations for optimizing each query, metadata about the queries, visual explain for each query, query timeline, query configuration, Directed Acyclic Graph (DAG) information, DAG flows, DAG swimlanes, DAG counters, and DAG configurations.

For Impala queries, the query comparison report includes query details, execution plan details, and the aggregated metrics for both the queries and provides a variance between the two.

Procedure

1. Log in to the Hue web interface.
2. Click Jobs from the left assist panel.
The **Job Browser** page is displayed.
3. Go to the **Queries** tab.
A list of queries that were run is displayed.

4. Select the two queries you want to compare and click Compare.

Query comparison report for Hive queries:

Queries

QUERY ID [hive_20220509083516_a9d00c94-657a-4d80-9cc2-51851ec711eb](#) USER [redacted] ...

QUERY ID [hive_20220509083138_56c823bb-c635-4d1e-b5e4-b031b5c0e21e](#) USER [redacted] ...

Query Info
Visual Explain
Timeline
Query Config
DAG Info
DAG Flow
DAG Swimlane
DAG Counters
DAG Configurations

QUERY
SELECT
*
FROM
customer
WHERE
c_nationkey = 15

QUERY
SELECT
*
FROM
customer

<p>START TIME 2 hours ago</p> <p>END TIME 2 hours ago</p> <p>DURATION 50s</p> <p>TABLES READ customer (default)</p> <p>TABLES WRITTEN -</p> <p>APPLICATION ID application_1652085158072_0001</p> <p>DAG ID dag_1652085158072_0001_2</p> <p>SESSION ID 76e59bed-40e6-4387-8c35-52606ecacaf4</p>	<p>START TIME 2 hours ago</p> <p>END TIME 2 hours ago</p> <p>DURATION 148ms</p> <p>TABLES READ customer (default)</p> <p>TABLES WRITTEN -</p> <p>APPLICATION ID</p> <p>DAG ID</p> <p>SESSION ID 1ac06098-d5cb-46ca-8d11-4e19d938871c</p> <p>LLAP APP ID</p> <p>THREAD ID HiveServer2-Background-Pool: Thread-245</p>
--	--

Query comparison report for Impala queries:

Job Browser
Jobs
Impala
Hive
Workflows
Schedules
Bundles
SLAs
Impala Queries

← Queries

QUERY ID [e140b4f4dff9c2d5cf78c8f400000000](#) USER admin STATUS ✓ FINISHED

QUERY ID [cb4137379d658f7a:b9c3488400000000](#) USER admin STATUS ✓ FINISHED

Query Info
Plan
Exec Summary
Metrics

Group Name	Counter Name	Metrics : e140b4f4dff9c2d5cf78c8f400000000	Metrics : cb4137379d658f7a:b9c3488400000000	Variance
HDFS Metrics	hdfs_bytes_read	96126	96126	<div style="width: 100%;"><div style="width: 100%; background-color: #007bff;"></div></div> 1x
HDFS Metrics	hdfs_bytes_read_local	96126	96126	<div style="width: 100%;"><div style="width: 100%; background-color: #007bff;"></div></div> 1x
HDFS Metrics	hdfs_bytes_read_local_percentage	100	100	<div style="width: 100%;"><div style="width: 100%; background-color: #007bff;"></div></div> 1x
HDFS Metrics	hdfs_bytes_read_remote	0	0	
HDFS Metrics	hdfs_bytes_read_remote_percentage	0	0	
HDFS Metrics	hdfs_bytes_read_short_circuit	96126	96126	<div style="width: 100%;"><div style="width: 100%; background-color: #007bff;"></div></div> 1x
HDFS Metrics	hdfs_bytes_read_short_circuit_percentage	100	100	<div style="width: 100%;"><div style="width: 100%; background-color: #007bff;"></div></div> 1x
HDFS Metrics	hdfs_bytes_read_from_cache	0	0	
HDFS Metrics	hdfs_bytes_read_from_cache_percentage	0	0	
HDFS Metrics	hdfs_average_scan_range	96126.0	96126.0	<div style="width: 100%;"><div style="width: 100%; background-color: #007bff;"></div></div> 1x
Memory Metrics	memory_per_node_peak	4225761.28	4225761.28	<div style="width: 100%;"><div style="width: 100%; background-color: #007bff;"></div></div> 1x
Memory Metrics	memory_per_node_peak_node	sree-test2-1.sree-test2.root.hwx.site:27000	sree-test2-1.sree-test2.root.hwx.site:27000	
Thread Time Metrics	thread_total_time	9	33	<div style="width: 100%;"><div style="width: 33%; background-color: #007bff;"></div></div> 3.67x

Starting SQL AI Assistant in Cloudera Data Explorer (Hue)

A SQL AI Assistant has been integrated into Data Explorer with the capability to leverage the power of Large Language Models (LLMs) for various SQL tasks. It helps you to create, edit, optimize, fix, and succinctly summarize queries using natural language and makes SQL development faster, easier, and less error-prone. You can also generate comments and insert them into your queries to improve readability.

About this task



Attention: The SQL AI Assistant operates only on the database that you have selected in the Data Explorer editor, and not necessarily on the one that is displayed on the left-assist bar.


Procedure

1. Log in to the Data Explorer (Hue) web interface.
2. Click  Assistant on the Data Explorer (Hue) SQL editor:



Results

The following options are displayed:

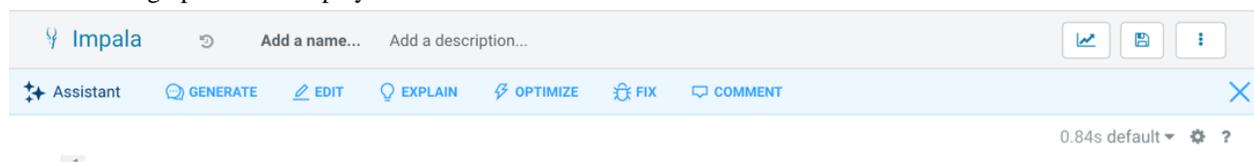

Generating SQL from natural language in Cloudera Data Explorer (Hue)

The SQL AI Assistant in Cloudera Data Warehouse helps you to generate SQL queries by entering a prompt in natural language. You can then insert the generated SQL in the Data Explorer SQL editor and run it as usual.


Procedure

1. Log in to the Data Explorer (Hue) web interface.

2. Click  Assistant on the Data Explorer (Hue) SQL editor:



3. Click GENERATE.

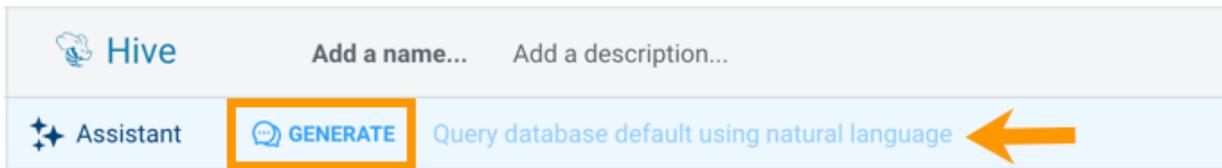

A SQL query is generated based on your input prompt. Click Insert to insert the query into the editor and run it.

Editing the query in natural language in Cloudera Data Explorer (Hue)

You can edit a query in natural language and generate it again to fine-tune your results using the Data Explorer SQL AI Assistant. You can then insert the SQL query into the editor and run it as usual.

Procedure

1. Log in to the Data Explorer (Hue) web interface.
2. Click  Assistant on the Data Explorer (Hue) SQL editor:



3. Click EDIT.



Select the query from the list and edit it as needed. Then press enter to regenerate the SQL.

Getting an explanation of a SQL query in natural language in Cloudera Data Explorer (Hue)


You can use the SQL AI Assistant to breakdown and understand a complex SQL query in natural language.

Procedure

1. Log in to the Data Explorer (Hue) web interface.
2. Insert a SQL query in the Data Explorer editor that you would like to understand in natural language.
3. Click  Assistant on the Data Explorer (Hue) SQL editor:



4. Click EXPLAIN.

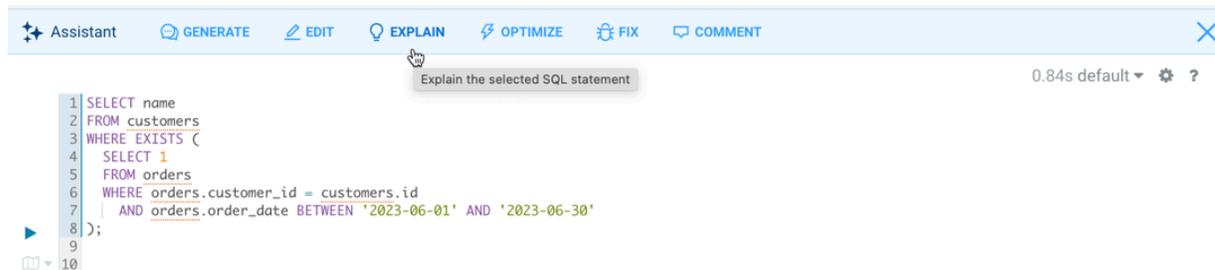

The screenshot shows the Hue interface with the 'EXPLAIN' button highlighted. A tooltip above the button reads 'Explain the selected SQL statement'. The SQL query in the editor is:

```

1 SELECT name
2 FROM customers
3 WHERE EXISTS (
4   SELECT 1
5   FROM orders
6   WHERE orders.customer_id = customers.id
7     AND orders.order_date BETWEEN '2023-06-01' AND '2023-06-30'
8 );
9
10

```

The LLM generates the explanation of the SQL query.

Explained SQL for default

```

1 SELECT name
2 FROM customers
3 WHERE EXISTS (
4   SELECT 1
5   FROM orders
6   WHERE orders.customer_id = customers.id
7     AND orders.order_date BETWEEN '2023-06-01' AND '2023-06-30'
8 );

```

SUMMARY

Returns the names of customers who placed an order between June 1, 2023 and June 30, 2023.

EXPLANATION

The given SQL query performs an EXISTS subquery to check if each customer in the customers table has any orders in the orders table that were placed between '2023-06-01' and '2023-06-30'.

It first selects the name column from the customers table. This is the outer query.

For each customer, it checks if there exists any rows in the orders table where:

- The order customer_id matches the current customer's id
- The order_date is between '2023-06-01' and '2023-06-30'

If there is at least one matching order for a given customer, the EXISTS subquery will return true and that customer's name will be included in the result set.

Insert as comment

Optimizing a query in Cloudera Data Explorer (Hue)


You can use the SQL AI Assistant to optimize a SQL query. Data Explorer identifies the issues in the source query, optimizes it, and provides the optimized version of the SQL query. Data Explorer also summarizes the issues and how it optimized the query in natural language.

Procedure


1. Log in to the Data Explorer (Hue) web interface.
2. Insert a SQL query in the Data Explorer editor that you would like to optimize.
3. Click  Assistant on the Data Explorer (Hue) SQL editor:



4. Click OPTIMIZE.

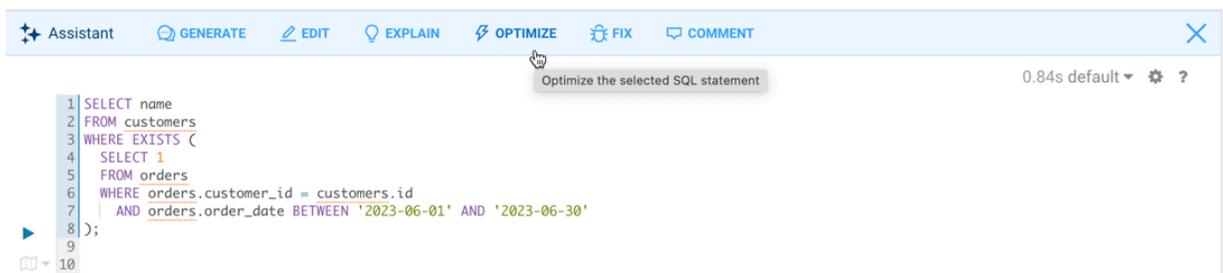

Data Explorer displays the original and the optimized SQL query side-by-side. It also provides an explanation of the issues in the original query and how it was optimized.

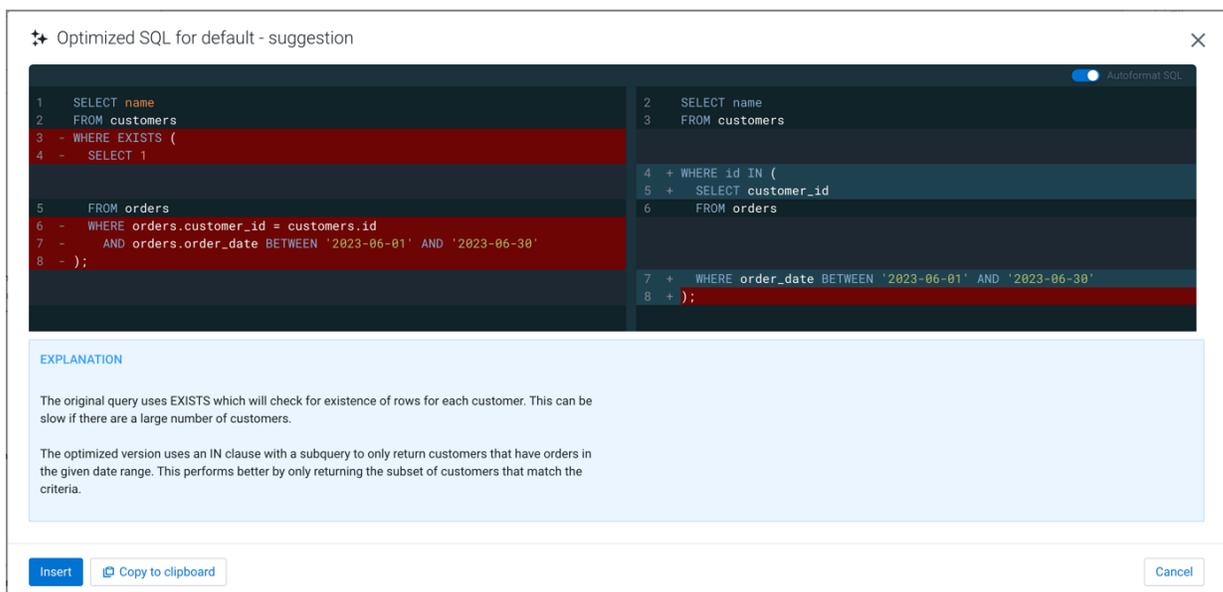

Fixing a query in Cloudera Data Explorer (Hue)


You can use the SQL AI Assistant to fix a broken SQL query. Data Explorer identifies the issues in SQL syntax and provides the corrected version.

Procedure


1. Log in to the Data Explorer (Hue) web interface.
2. Insert a SQL query in the Data Explorer editor that you would like to fix.
3. Click  Assistant on the Data Explorer (Hue) SQL editor:



4. Click FIX.

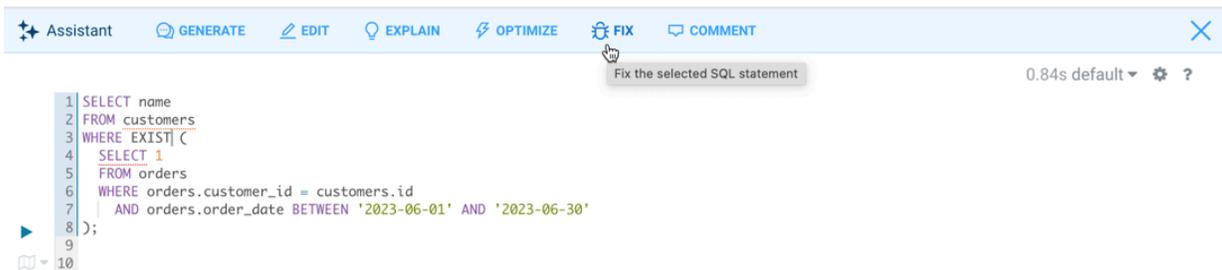

Data Explorer displays the original and the fixed SQL query in a side-by-side comparison.

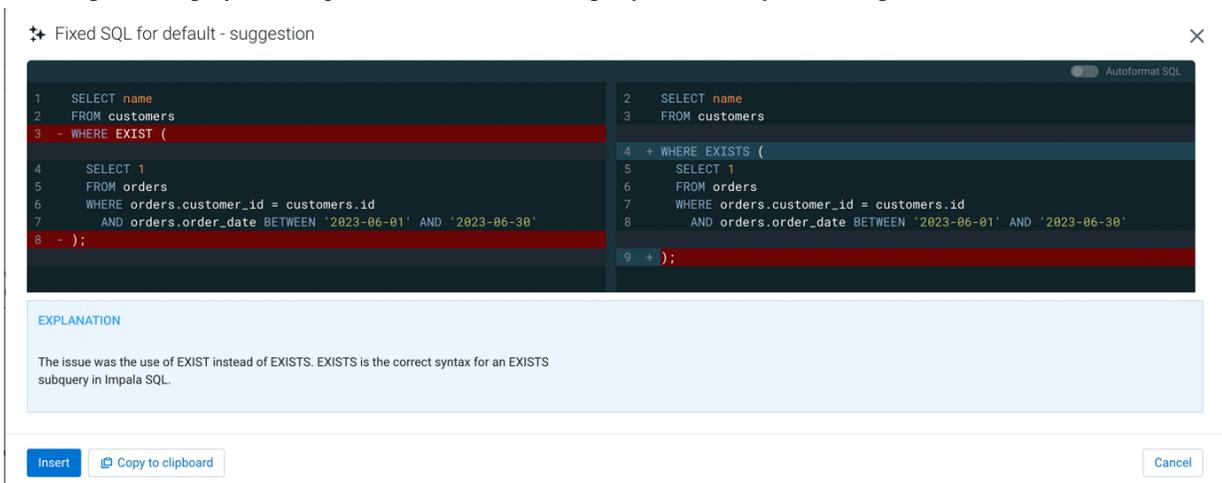

Click Insert to insert the fixed query in the Data Explorer editor and run it.

Generating a comment for a query in Cloudera Data Explorer (Hue)


The Data Explorer SQL AI Assistant can generate a comment explaining what SQL query does. You can insert it into the query to improve readability.

Procedure


1. Log in to the Data Explorer (Hue) web interface.
2. Insert a SQL query in the Data Explorer editor for which you want to generate a comment.
3. Click  Assistant on the Data Explorer (Hue) SQL editor:



4. Click COMMENT.

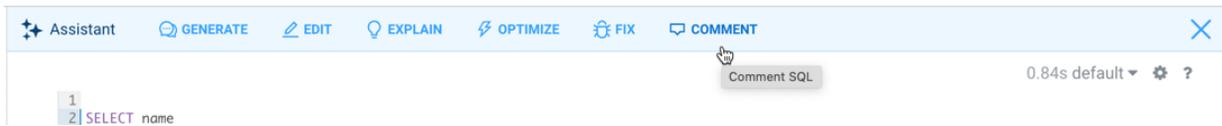

The SQL AI Assistant generates a detailed comment for the input SQL query.

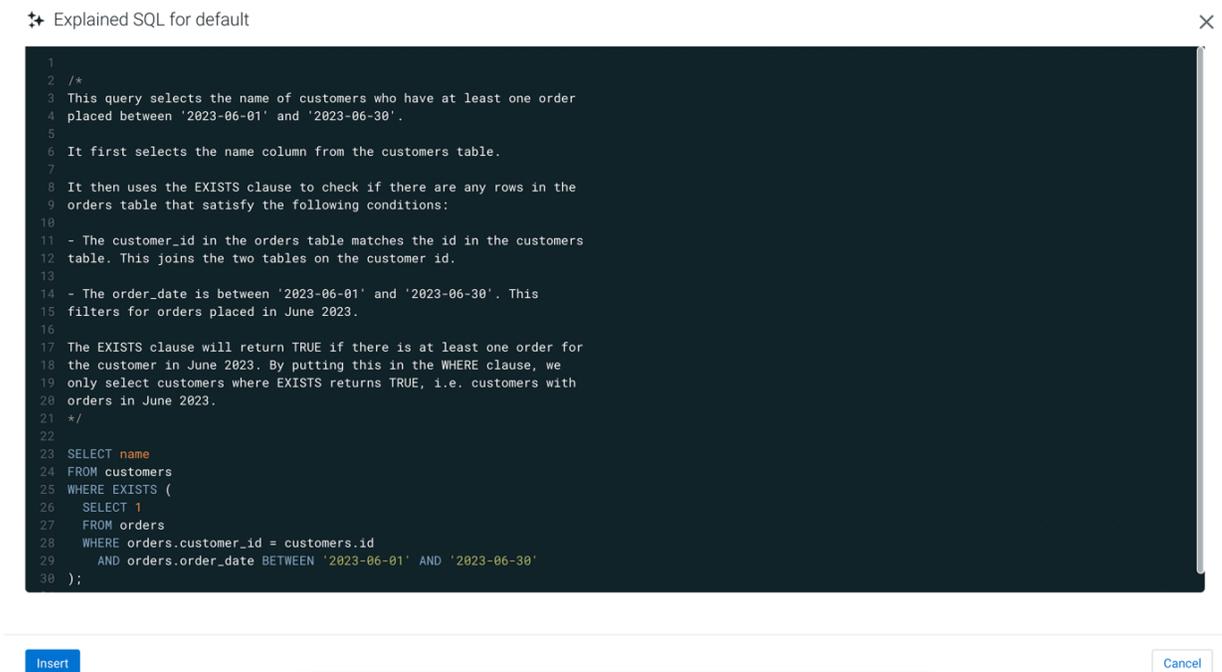

Click Insert to insert the comment into the query.

Enabling stored procedures for Hive in Cloudera Data Hub

To create, edit, and drop procedures and functions that are written in Hive Hybrid Procedural SQL (HPL/SQL) using the Hue query editor, you must enable the `hpsql` option in the Hue Advanced Configuration Snippet.

About this task



Note: Hue enables you to switch between Hive and HPL/SQL interpreters. By default, the regular Hive interpreter is enabled when you add the Hue service to your cluster. To enable the HPL/SQL interpreter, you must update Hue's Advanced Configuration Snippet in Cloudera Manager. However, updating Hue's Advanced Configuration Snippet overrides the default configuration. Therefore, to use both Hive and HPL/SQL interpreters, you must enable both by updating Hue's Advanced Configuration Snippet.

Procedure

1. Log in to the Cloudera web interface as an Administrator.
2. Go to Cloudera Management Console Environments , select your environment and go to the Data Lake tab.
3. Click on the CM URL to open Cloudera Manager.
4. Go to Clusters Hue Configuration and add the following lines in the Hue Service Advanced Configuration Snippet (Safety Valve) for hue_safety_valve.ini field:

```
[notebook]
  [[interpreters]]
    [[[hive]]]
      name=Hive
      interface=hiveserver2
    [[[hplsql]]]
      name=Hplsql
      interface=hiveserver2
```

5. Click Save Changes.
6. Restart the Hue service.
7. Go to Clusters Hive on Tez Configuration and add the following property name and its value in the Hive Service Advanced Configuration Snippet (Safety Valve) for hive-site.xml field:

Name: hive.security.authorization.sqlstd.confwhitelist.append

Value: QUERY_EXECUTOR|HPLSQL
8. Click Save Changes.
9. Restart the Hive on Tez service.

How to run a stored procedure from Cloudera Data Explorer (Hue) in Cloudera Data Hub

HPL/SQL allows you to implement business logic using variables, expressions, flow-of-control statements, and iterations. HPL/SQL makes SQL-on-Hadoop more dynamic. You can leverage your existing procedural SQL skills, and use functions and statements to make your typical ETL development more productive. Hue provides a smart interface to run stored procedures.



Note: This feature is available only for Hive queries.

The following example creates a procedure and returns records by passing a cursor:

```
print 'Hello world';/
CREATE PROCEDURE greet(name STRING)
BEGIN
  PRINT 'Hello ' || name;
END;/
CREATE PROCEDURE even(cur OUT SYS_REFCURSOR)
BEGIN
  OPEN cur FOR
  SELECT n FROM NUMBERS
```

```
WHERE MOD(n, 2) == 0;
END;/
CREATE PROCEDURE set_message(IN name STRING, OUT result STRING)
BEGIN
  SET result = 'Hello, ' || name || '!';
END;
-- Call the procedure and print the results
DECLARE str STRING;
CALL set_message('world', str);
PRINT str;
```



Attention: In the hpsql mode, you must terminate the commands using the forward slash (/). The semicolon (;) is used throughout procedure declarations and can no longer be relied upon to terminate a query in the editor.



Note: HPL/SQL does not support all types of Hive statements, such as JOIN or EXPLAIN. Refer to the [HPL/SQL Reference](#) for more information.

Related Information

[Enabling stored procedures for Hive in Cloudera Data Hub](#)


Using SQL to query HBase from Cloudera Data Explorer (Hue)

Hue provides a simple SQL interface to create and manipulate SQL tables that are stored in HBase, and define and manipulate views on HBase tables using Apache Phoenix in addition to HBase shell and database API.

Cloudera does not recommend manipulating Phoenix tables from HBase as this can lead to data loss.

The SQL connector is shipped with Hue so that you do not have to download and configure it yourself.

Following are some examples to create and manipulate the Phoenix SQL tables from the Hue editor:

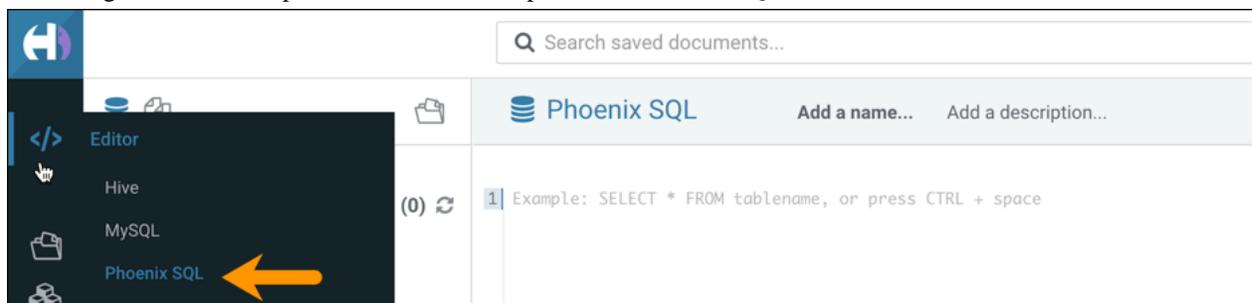

Creating a table

```
CREATE TABLE IF NOT EXISTS Company (company_id INTEGER PRIMARY KEY, name VAR
CHAR(225));
```

Upserting values in the table

```
UPSERT INTO Company VALUES(1, 'Cloudera');
UPSERT INTO Company VALUES(2, 'Apache');
```

Querying the table

```
SELECT * FROM Company;
```

Deleting a record

```
DELETE FROM Company WHERE COMPANY_ID=1;
```

Dropping the table

```
DROP TABLE Company;
```

Related Information

[Apache Phoenix SQL command reference](#)

[Apache Phoenix Grammar](#)

Querying existing HBase tables

To use SQL for querying data from existing HBase tables, you must create a view in Phoenix pointing to the HBase table.

To map the existing tables to the views, run the following statement using the Phoenix editor on the Hue web interface:

```
CREATE VIEW if not exists "[***HBASE-TABLE-NAME***]" ( pk VARCHAR PRIMARY KEY, val VARCHAR );
```

Related Information

[Mapping a Phoenix table to an existing HBase table](#)

Enabling the SQL editor autocompleter

Autocompleter provides finely tuned SQL suggestions for Hive and Impala dialects while you enter queries into the editor window. See [Brand new Autocompleter for Hive and Impala](#) in the Hue blog.

About this task

Autocompleter is enabled by default. To manually enable or disable it, open the editor configuration panel and edit settings as follows:

Procedure

1. Log in to Hue and go to either the Hive or Impala editor.
2. Place your cursor in the editor window and then use one of the following keyboard shortcuts to open the editor configuration panel:

- On a Mac system, use the Command key followed by a hyphen and then a comma:

Command-,


- On a Windows system, use the Ctrl key followed by a hyphen and then a comma:

Ctrl-,



Tip: Type a question mark (?) anywhere but in the active editor window to open a menu of editor keyboard shortcuts.

- To enable autocompletion, check the box adjacent to Enable Autocompleter. When you check Enable Autocompleter, Enable Live Autocompletion is automatically enabled as well. Place your cursor in the editor window to close the configuration panel.

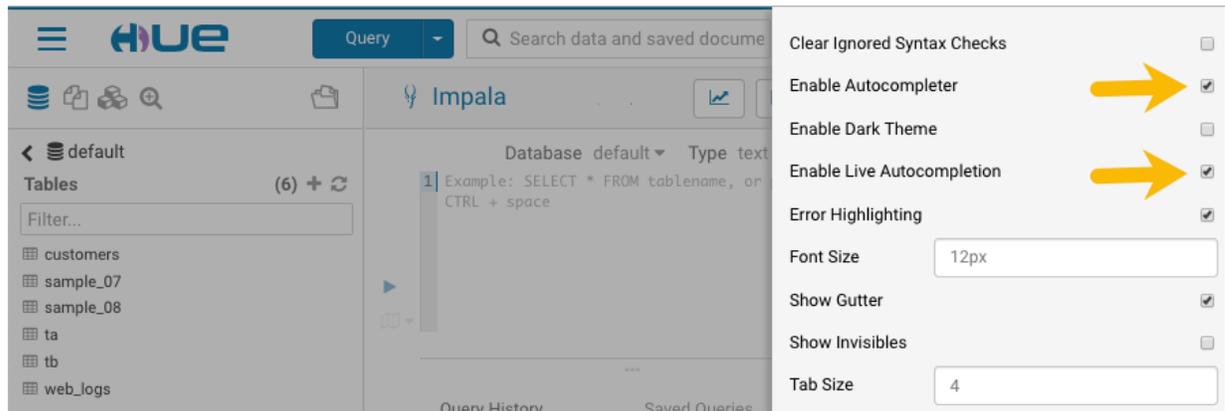

- To disable autocompletion:

- Uncheck Enable Live Autocompletion but leave Enable Autocompleter checked, and then place your cursor in the editor window to close the configuration panel. This disables live autocompletion, but if you want to use autocompletion while building your queries in the editor, enter the following key stroke sequence to activate autocompletion: Ctrl + Space Key
- Uncheck both Enable Autocompleter and Enable Live Autocompletion, and then click in the editor to close the configuration panel. This disables all autocompletion functionality.

Rerunning a query from the Job Browser page

You may need to reconfigure the query parameters post a query execution, based on the results. You can modify and rerun your historical queries from the Job Browser page.

About this task



Note: Only Query Processor Administrators can view and rerun historical queries of all users from the **Job Browser** page. Non-admin users can view and rerun only their queries.

Procedure

- Log in to the Hue web interface.
- Select Jobs from the left assist panel and click Queries on the **Job Browser** page.
- Click on the query that you want to rerun.

The query details are displayed.

- Click Re Execute.

You are redirected to the query editor where you can make the required changes to the pre-populated query.

-

Click  to submit the query.

Using governance-based data discovery

Hue can use the metadata tagging, indexing, and search features available in Apache Atlas data management. After integrating Hue with Atlas, classifications and indexed entities can be accessed and viewed in Hue. This topic shows you how to use metadata classifications in Hue.

Integration between Hue and Atlas is enabled by default, but if your administrator has disabled it, it must be re-enabled before you can use governance-based data discovery.

You can create tags to classify your data both from Atlas and Hue.

Searching metadata tags

The SQL Editor in Hue provides a search text box where you can search on the metadata tags or classifications that are associated with your databases, tables, and columns.

About this task

You can search for tags or classifications in either the Hive or the Impala editors.



Note: On clusters that use Apache Ranger for role-based access control, the Search mechanism does not display counts of popular values. Ranger ensures that Hue users can view only entities to which their user role (as configured and managed by Ranger) has been granted specific permissions.

Procedure

1. Go to Query Editor Impala or Hive.
2. To locate the tags or classifications in Apache Atlas, in the metadata search box located just to the right of the Query drop-down menu, type a tag: or classification: facet followed by its name. For example, type classification: wine as shown in the following image:

The screenshot shows the Hue interface with a search box containing the text 'classification:wine'. Below the search box, a table is displayed with the following columns: Column (3), Type, Description, and Sample. The table contains three rows of data:

Column (3)	Type	Description	Sample
id	int		
name	string		
address	string		

After you type the search facet and the tag or classification name in the search box, the `<DATABASE>.<TABLE>` where the tag or classification is found is returned. Click the `<DATABASE>.<TABLE>` to view the tags and classifications that have been defined for it.

Using Amazon S3 with Cloudera Data Explorer (Hue)

Hue can read to and write to an Amazon S3 bucket.



Note:

You can use the S3 browser to store and retrieve data from Amazon S3 buckets into Hue and vice versa. If your Cloudera cluster is secured using Knox, then the Hue users will be able to access the S3 folders as per the access rules set on the individual folders. The access permissions are governed by IDBroker.

In Cloudera, you can enable the S3 File Browser in Hue in the following three ways:

- With IDBroker
- Without IDBroker
- With Ranger Authorization Service



Note: If you have enabled RAZ while registering your AWS environment with Cloudera, then Hue uses RAZ as the default mechanism for enabling the S3 File Browser.

Enabling S3 browser for Cloudera Data Explorer (Hue) configured with IDBroker

You can access the S3 buckets from Hue to upload files and tables to S3 and import CSV files as tables directly in Hue by enabling the S3 browser on the Hue user interface.

Before you begin

If you have set up authentication using Knox IDBroker on your cluster, then Hue automatically detects and uses the IDBroker mappings from your cluster's core-site.xml file. Verify that the following property is present in the core-site.xml file:

```
<property>
  <name>fs.s3a.ext.cab.address</name>
  <value>https://<IDBROKERURL>:8444/gateway</value>
</property>
```

This property is automatically appended to the core-site.xml file when you enable Knox IDBroker on your cluster.

Procedure

1. Sign in to Cloudera Manager as an Administrator.
2. Go to Clusters Hue service Configuration .
3. Enter the following in the Hue Server Advanced Configuration Snippet (Safety Valve) for hue_safety_valve_server.ini field:

```
[desktop]
# Remove the file browser from the blacklisted apps.
# Tweak the app_blacklist property to suit your app configuration.
app_blacklist=spark,zookeeper,hive,hbase,search,oozie,jobsub,pig,sqoop,security
[aws]
has_iam_detection=true
[[aws_accounts]]
[[[default]]]
region=[***AWS-REGION***]
# Set a particular S3 bucket as the default
[filebrowser]
remote_storage_home=s3a://[***S3-BUCKET-NAME***]
```

The custom configuration is stored in the hue_safety_valve_server.ini file.

4. Click Save Changes.
5. Restart the Hue service.

The S3 file browser icon appears on the left Assist panel as well as on the left navigation bar on the Hue web interface.

What to do next

You must manually grant the following application permission to non-admin users and groups for them to be able to view and access S3 File Browser in Hue: filebrowser.s3_access:Access to S3 from filebrowser and filepicker..

You must also add the Cloudera users and groups to IAM role mappings.

Related Information[Granting permission to access S3 and ABFS File Browser in Hue](#)[Adding Cloudera user/group to IAM role mappings](#)**Enabling S3 browser for Cloudera Data Explorer (Hue) configured without IDBroker**

You can access the S3 buckets from Hue to upload files and tables to S3 and import CSV files as tables directly in Hue by enabling the S3 browser. You must specify the AWS access key and secret access key information along with the AWS region in the Hue Server Advanced Configuration Snippet if you have not set up authentication using Knox IDBroker.

Procedure

1. Sign in to Cloudera Manager as an Administrator.
2. Go to Clusters Hue service Configuration .
3. Enter the following in the Hue Server Advanced Configuration Snippet (Safety Valve) for hue_safety_valve_server.ini field:

```
[desktop]
# Remove the file browser from the blacklisted apps.
# Tweak the app_blacklist property to suit your app configuration.
app_blacklist=spark , zookeeper , hive , hbase , search , oozie , jobsub , pig , sqoop , security
[aws]
[[aws_accounts]]
[[[default]]]
access_key_id=[**AWS-ACCESS-KEY**]
secret_access_key=[**SECRET-ACCESS-KEY**]
region=[**AWS-REGION**]

# Set a particular S3 bucket as the default
[filebrowser]
remote_storage_home=s3a://[**S3-BUCKET-NAME**]
```

The custom configuration is stored in the hue_safety_valve_server.ini file.

4. Click Save Changes.
5. Restart the Hue service.

The S3 file browser icon appears on the left Assist panel as well as on the left navigation bar on the Hue web interface.

What to do next

You must manually grant the following application permission to non-admin users and groups for them to be able to view and access S3 File Browser in Hue: filebrowser.s3_access:Access to S3 from filebrowser and filepicker.

Related Information[Granting permission to access S3 and ABFS File Browser in Hue](#)**Enabling S3 File Browser for Cloudera Data Explorer (Hue) with RAZ in DataHub**

Hue offers you the capability to browse S3 buckets, upload files to S3, and create tables by importing files from S3. With RAZ, you can grant fine-grained access to per-user home directories and other directories within the S3 bucket using Ranger policies.

About this task

Hue administrators can create home directories for users by selecting the Create home directory option on the user's profile in Hue. If fine-grained authorization is enabled to access S3 buckets, then user home directories are automatically created when a user logs into Hue. You can disable automatic creation of user directories.

Before you begin

1. Register an AWS environment with the Enable Ranger authorization for AWS S3 option enabled. You can use the Cloudera web interface or the Cloudera CLI to complete this task.
2. Create a Cloudera Data Hub cluster with Data Engineering or Data Mart cluster template.
3. Create the following Ranger policies:

- Hadoop SQL policy (all - database, table, column, all - url).



Note: You must grant permissions to individual users or groups in these Ranger policies. To grant permissions to all users, you can specify {USER} in the Permission section.

- S3 (cm_S3) policy (Default: User Home).

You must specify the bucket name in the S3 Bucket field and the directory path in the Path field of the cm_S3 Ranger policy.

4. Grant appropriate permissions to the users in Cloudera User Management Service (UMS). For example, EnvironmentUser.

Procedure

1. Log in to the Cloudera web interface as an Administrator.
2. Go to Management Console Environments , select your environment and go to the Data Lake tab.
3. Click on the CM URL to open Cloudera Manager.
4. Go to Clusters Ranger RAZ service Instances RAZ server Processes and note the value of the fs.s3a.ext.raz.rest.host.url property from the core-site.xml file. You need this to specify the value of the api_url property in the Hue configuration.
5. Go to Clusters Hue service Configuration Hue Service Advanced Configuration Snippet (Safety Valve) for hue_safety_valve.ini and add the following lines:

```
[desktop]
app_blacklist=spark , zookeeper , hbase , impala , search , sqoop , security , pig
[[raz]]
is_enabled=true
api_url=[**fs.s3a.ext.raz.rest.host.url**]
[aws]
has_iam_detection=false

[[aws_accounts]]
[[[default]]]
region=[**AWS-REGION**]
host=s3.[**AWS-REGION**].amazonaws.com
allow_environment_credentials=false

[filebrowser]
remote_storage_home=s3a://[**S3-BUCKET-NAME**]/user
```

(RAZ-HA) You can specify a comma-separated list of URLs in the api_url property. For example:

```
api_url=https://[**INSTANCE-1**]:6082/,https://[**INSTANCE-2**]:6082/
```

6. If you prefer to disable the new storage connector, you must set use_storage_connectors to false as follow:

```
[desktop]
use_storage_connector= false
[[raz]]
is_enabled=true
api_url=[**fs.s3a.ext.raz.rest.host.url**]
[aws]
has_iam_detection=false
```

```
[[aws_accounts]]
[[[default]]]
region=[**AWS-REGION**]
host=s3.[**AWS-REGION**].amazonaws.com
allow_environment_credentials=false
[filebrowser]
remote_storage_home=s3a://[**S3-BUCKET-NAME**]/user
s
```

7. Click Save Changes.
8. Restart the Hue service.

Results

S3 File Browser icon is added to the left assist pane on the Hue web interface. When you click on the S3 File Browser icon, you are redirected to your user home directory.

Related Information

[Introduction to RAZ on AWS environments](#)

[Disabling the automatic creation of user home directories](#)

Using Azure Data Lake Storage Gen2 with Cloudera Data Explorer (Hue)

Hue can read to and write to an Azure Data Lake Storage (ADLS) Gen2.



Note:

You can use the ABFS file browser to store and retrieve data from ADLS Gen2 into Hue and vice versa. If your Cloudera cluster is secured using Knox, then the Hue users will be able to access the ADLS as per the access rules set on the individual components. The access permissions are governed by IDBroker.

Only Hue superusers can view and access the ABFS file browser.

In Cloudera, you can enable the ABFS File Browser in Hue in the following three ways:

- With IDBroker
- Without IDBroker
- With Ranger Authorization Service

Enabling ABFS file browser for Cloudera Data Explorer (Hue) configured with IDBroker

You can directly access the Azure file storage from Hue to upload files and tables to Azure file storage and import CSV files as tables directly in Hue by enabling the ABFS file browser on the Hue user interface.

Before you begin

If you have set up authentication using Knox IDBroker on your cluster, then Hue automatically detects and uses the IDBroker mappings from your cluster's core-site.xml file. Verify that the following property is present in the core-site.xml file:

```
<property>
  <name>fs.azure.ext.cab.address</name>
  <value>https://<IDBROKERURL>:8444/gateway</value>
</property>
```

This property is automatically appended to the core-site.xml file when you enable Knox IDBroker on your cluster.

You can also check whether there is a mapped role for the group(s) associated with the authenticated user by going to Cloudera Management Console Environments Actions Manage Access IDBroker Mappings . If no role is mapped, then you may see the following error: Failed to obtain storage credentials from IDBroker with error: 403 Client Error: Forbidden for url: <url> { "error": "There is no mapped role for the group(s) associated with the authenticated

user.", "auth_id": "<user-id>" }. To resolve this, add the user and the Data Access role to the current mappings on the **IDBroker Mappings** page.

Procedure

1. Sign in to Cloudera Manager as an Admin user.
2. Go to Clusters Hue service Configuration .
3. Specify the following in the Hue Server Advanced Configuration Snippet (Safety Valve) for hue_safety_valve_server.ini field:

```
[desktop]
# Remove the file browser from the blacklisted apps.
# Tweak the app_blacklist property to suit your app configuration.
app_blacklist=spark,zookeeper,hive,hbase,search,oozie,jobsub,pig,sqoop,security
[azure]
[[abfs_clusters]]
[[[default]]]
fs_defaultfs=abfs://<CONTAINER_NAME>@<STORAGE_NAME>.dfs.core.windows.net
webhdfs_url=https://<STORAGE_NAME>.dfs.core.windows.net/
```

The custom configuration is stored in the hue_safety_valve_server.ini file.

4. (Optional) If the Knox server and Hue are not present on the same host, then add the Hue server's FQDN to the trusted origins property in the Hue Server Advanced Configuration Snippet (Safety Valve) for hue_safety_valve_server.ini field:

```
[desktop]
[[session]]
trusted_origins=[***HUE-SERVER-FQDN***]
```

5. Click Save Changes.
6. Restart the Hue service.

The ABFS file browser icon appears on the left Assist panel as well as on the left navigation bar on the Hue web interface.

What to do next

You must manually grant the following application permission to non-admin users and groups for them to be able to view and access ABFS File Browser in Hue: filebrowser.abfs_access:Access to ABFS from filebrowser and file picker.

You must also add the Cloudera users and groups to IAM role mappings.

Related Information

[Granting permission to access S3 and ABFS File Browser in Hue](#)

[Adding Cloudera user/group to IAM role mappings](#)

Enabling ABFS File Browser in Cloudera Data Explorer (Hue) with RAZ in DataHub

Hue offers you the capability to browse Azure Data Lake Storage (ADLS) Gen2 file system, upload files to ABFS, and create tables by importing files from ABFS containers. With RAZ, you can grant fine-grained access to per-user home directories and other directories within the ADLS containers using Ranger policies.

About this task

Hue administrators can create home directories for users by selecting the Create home directory option on the user's profile in Hue. If fine-grained authorization is enabled to access ADLS containers, then user home directories are automatically created when a user logs into Hue. You can disable automatic creation of user directories.



Note: If you have enabled RAZ while registering your Azure environment with Cloudera, then Hue uses RAZ as the default mechanism for enabling the ABFS File Browser

Before you begin

You must enable RAZ while registering your environment with Cloudera. See [Introduction to RAZ on Azure environments](#) to get started with RAZ and complete the following steps:

1. Register an Azure environment with the Enable Ranger authorization for ADLS Gen2 option enabled. You can use the Cloudera web interface or the Cloudera CLI to complete this task.
2. Create a Cloudera Data Hub cluster with Cloudera Data Engineering or Data Mart cluster template.
3. Create the following Ranger policies:

- Hadoop SQL policy (all - database, table, column, all - url).



Note: You must grant permissions to individual users or groups in these Ranger policies. To grant permissions to all users, you can specify {USER} in the Permission section.

- ABFS (cm_ADLS) policy (Default: User Home)

You must specify the storage account name in the Storage Account field and the directory path of the container and its sub-directories in the Storage Account Container field of the cm_ADLS Ranger policy.

4. Grant appropriate permissions to the users in Cloudera User Management Service (UMS). For example, EnvironmentUser.

Procedure

1. Log in to the Cloudera web interface as an Administrator.
2. Go to Management Console Environments , select your environment and go to the Data Lake tab.
3. Click on the CM URL to open Cloudera Manager.
4. Go to Clusters Ranger RAZ service Instances RAZ server Processes and note the value of the fs.azure.ext.raz.rest.host.url property from the core-site.xml file. You need this to specify the value of the api_url property in the Hue configuration.
5. Go to Clusters Hue service Configuration Hue Service Advanced Configuration Snippet (Safety Valve) for hue_safety_valve.ini and add the following lines:

```
[desktop]
app_blacklist=spark,zookeeper,hbase,impala,search,sqoop,security,pig
[[raz]]
is_enabled=true
api_url=[***fs.azure.ext.raz.rest.host.url***]

[azure]
[[abfs_clusters]]
[[[default]]]
fs_defaultfs=abfs://[***CONTAINER-FOR-DATA-ACCESS***]@[***STORAGE-ACCOUNT***].dfs.core.windows.net
webhdfs_url=https://[***STORAGE-ACCOUNT***].dfs.core.windows.net

[filebrowser]
remote_storage_home=abfs://[***CONTAINER-FOR-DATA-ACCESS***]/user
```

For example:

- fs_defaultfs=abfs://storage-fs@mystorage.dfs.core.windows.net
- webhdfs_url=https://mystorage.dfs.core.windows.net

- `remote_storage_home=abfs://storage-fs/user`

(RAZ-HA) You can specify a comma-separated list of URLs in the `api_url` property. For example:

```
api_url=https://[***INSTANCE-1***]:6082/,https://[***INSTANCE-2***]:6082/
```

6. Click Save Changes.
7. Restart the Hue service.

Results

ABFS File Browser icon is added to the left assist pane on the Hue web interface. When you click on the ABFS File Browser icon, you are redirected to your user home directory.

Related Information

[Introduction to RAZ on Azure environments](#)

[Disabling the automatic creation of user home directories](#)

Using Amazon S3-compatible object stores with Data Explorer

Learn how Data Explorer supports accessing AWS S3-compatible object stores using the S3A connector.

Enabling AWS S3 compatible Object Stores in Cloudera Data Explorer (Hue) without RAZ

You can enable S3-compatible object stores in Data Explorer.

Procedure

1. Log in to the Cloudera web interface as an Administrator.
2. Go to Management Console Environments , select your environment and go to the Data Lake tab.
3. Click on the CM URL to open Cloudera Manager.
4. Go to Clusters Hue service Configuration and locate Hue Service Advanced Configuration Snippet (Safety Valve) for `hue_safety_valve.ini`.

Add the following lines in the `hue-safety-valve` configuration:

```
[desktop]
use_storage_connector=true
```

By default, this configuration is enabled as `true`.

5. For enabling the new storage browser for S3-compatible object stores without RAZ:

```
[desktop]
[[storage_connectors]]
[[[default]]]
provider=[compatible s3 object stores]
auth_type=key
endpoint=http(s)://<object-store-host>:<object-store-port>
access_key_id=xx
secret_key=xx
bucket_configs={"<bucket>": {"default_home_path": "s3a://<path>/user"}}
```

6. Click Apply Changes.
7. Restart the Virtual Warehouse.

Using Google Cloud Storage with Cloudera Data Explorer (Hue)

Hue can read to and write to Google Cloud Storage (GS) buckets.

Hue offers you the capability to browse GS buckets, upload files to GS, and create tables by importing files from GS. Using Ranger Authorization Service (RAZ), you can grant fine-grained access to per-user home directories and other directories within the GS bucket using Ranger policies.

Hue administrators can create home directories for users by selecting the Create home directory option on the user's profile in Hue. If fine-grained authorization is enabled to access GS buckets, then user home directories are automatically created when a user logs into Hue. You can disable the automatic creation of user directories.

Related Information

[Disabling the automatic creation of user home directories](#)

Prerequisites for enabling GS File Browser in Hue with RAZ in Cloudera Data Hub

First, you must register your Google Cloud environment with Cloudera with the Enable Ranger authorization for Google Cloud Storage option enabled. Next, you must set up Ranger policies for fine-grained access control for your user and Google Cloud Storage (GS) buckets.

Procedure

1. Log in to the Cloudera Management Console as an Administrator.
2. Register a GCP environment with the Enable Ranger authorization for Google Cloud Storage option enabled. You can complete this task using the Cloudera web interface or the Cloudera CLI.
3. Create a Cloudera Data Hub cluster with a Cloudera Data Engineering or Data Mart cluster template.
4. Create the following Ranger policies:
 - a) Hadoop SQL policy (all - database, table, column, all - url).



Note: You must grant permissions to individual users or groups in these Ranger policies. To grant permissions to all users, specify {USER} in the **Permission** section.

- b) GS (cm_gs) policy (Default: User Home).

You must specify the bucket name in the GS Bucket field and the directory path in the Path field of the cm_gs Ranger policy.
5. Grant appropriate permissions to the users in the Cloudera User Management Service (UMS). For example, EnvironmentUser--grants permission to view Cloudera Data Hub clusters and set the workload password for the environment.

What to do next

Enable the GS File Browser in Hue by configuring [desktop] properties in the Hue Advanced Configuration Snippet using Cloudera Manager.

Related Information

[Introduction to RAZ on GCP environments](#)

Enabling GS File Browser for Cloudera Data Explorer (Hue) with RAZ in Cloudera Data Hub

After you have registered your Google Cloud environment with Cloudera with the Enable Ranger authorization for Google Cloud Storage (GS) option enabled, created a Cloudera Data Hub cluster, created the required Ranger policies, and granted access to your users, you can enable the GS File Browser using Cloudera Manager.

Procedure

1. Log in to the Cloudera web interface as an Administrator.
2. Go to Cloudera Management Console Environments , select your environment and go to the Data Lake tab.

3. Click on the link under CM URL to open Cloudera Manager.
4. Go to Clusters Ranger RAZ service Instances RAZ server Processes and note the value of the `fs.s3a.ext.raz.rest.host.url` property from the `core-site.xml` file. You need this to specify the value of the `api_url` property in the Hue configuration.
5. Go to Clusters Hue service Configuration Hue Service Advanced Configuration Snippet (Safety Valve) for `hue_safety_valve.ini` and add the following lines:

```
[desktop]
app_blacklist=spark,zookeeper,hbase,impala,search,sqoop,security,pig
[[raz]]
is_enabled=true
is_raz_gs_enabled=true
api_url=[***FS.S3A.EXT.RAZ.REST.HOST.URL***]

[filebrowser]
remote_storage_home=gs://[***GS-BUCKET-NAME***]/user
```

(RAZ-HA) You can specify a comma-separated list of URLs in the `api_url` property. For example:

```
api_url=https://[***INSTANCE-1***]:6082/,https://[***INSTANCE-2***]:6082/
```

6. Click Save Changes.
7. Restart the Hue service.

Results

GS File Browser icon is added to the left assist panel on the Hue web interface. When you click the GS File Browser icon, you are redirected to your user home directory.

Disabling the automatic creation of user home directories

If you have enabled fine-grained authorization to access S3 buckets, ADLS Gen 2 storage, or Google Cloud Storage buckets, then Hue is configured to automatically create user home directories, by default. You can disable the automatic creation of user home directories by setting the `autocreate_user_dir` flag to `false` in the Hue Service Advanced Configuration Snippet.

Procedure

1. Log in to the Cloudera web interface as an Administrator.
2. Go to Data Hub Clusters and select your cluster.
3. Click on the CM URL to open Cloudera Manager.
4. Go to Clusters Hue service Configuration Hue Service Advanced Configuration Snippet (Safety Valve) for `hue_safety_valve.ini` and add the following lines:

```
[desktop]
[[raz]]
autocreate_user_dir=false
```

5. Click Save Changes.
6. Restart the Hue service.

Granting permission to access S3, ABFS, GS File Browser in Cloudera Data Explorer (Hue)

Only admin users can view and access S3, ABFS, and GS File Browser in Hue after enabling it. You must manually grant application permissions to non-admin users and groups for them to be able to view and access S3, ABFS, and GS File Browsers in Hue.

About this task

The following table lists the application permissions for each cloud storage type:

Cloud storage	Hue application permission
S3	filebrowser.s3_access:Access to S3 from filebrowser and filepicker.
ABFS (ADLS Gen2)	filebrowser.abfs_access:Access to ABFS from filebrowser and filepicker.
ADLS (Gen1)	filebrowser.adls_access:Access to ADLS from filebrowser and filepicker.
GS	Access to GS from filebrowser and filepicker.

Before you begin

You can only assign Hue application permissions to groups or users within a group. Add the users to a group to whom you want to grant access to the S3, ABFS, or GS File Browsers.



Important: The "default" group in Hue does not have the permissions required to view S3, ABFS, or GS File Browsers, by default. If your users belong to the default group, then you must manually grant the required permissions.

Procedure

1. Sign in to Hue as an Administrator.
2. Go to admin Manage Users Groups .
3. Click on the group to whom you want to grant the filebrowser application permissions.
4. On the **Edit [***GROUP-NAME***]** page, select the required permission under the permission section and click Update group.

Creating tables in Cloudera Data Explorer (Hue) by importing files

Using Hue Importer, you can create Hive, Impala, and Iceberg tables from CVS and XLSX files. After enabling the File Browser for your cloud provider, you can import the file into Hue to create tables.

About this task

You can upload and import a 200 KB file from your local computer, or import a file up to 3 GB from cloud storage (S3, ADLS Gen2, and Google Cloud Storage (GS) buckets) using the Importer.



Note: To enable uploading a small local file from your computer, you must go to Cloudera Manager Clusters Hue Configuration and add the following lines in the Hue Service Advanced Configuration Snippet (Safety Valve) for hue_safety_valve.ini field:

```
[indexer]
# Flag to turn on the direct upload of a small file.
enable_direct_upload=true
```

You can create managed and external tables. When you create managed tables, the data is moved to HDFS in the Cloudera Data Warehouse workspace. When you create external tables, your data remains in its original location.



Note: Superusers can browse all directories up to the root. Other users can only browse and access buckets and directories that they are granted access to.

Before you begin

- Enable user access to cloud storage buckets/containers in Ranger
- Enable the File Browser for your cloud provider

Procedure

1. Log in to the Hue web interface.
2. Click Importer from the left-assist panel.

Alternatively, click **+** to create tables under the **Databases Tables** list view. This opens the Hue Importer.

3. Under **SOURCE**, select **Remote File** from the **Type** drop-down menu.
4. Click **..** at the end of the **Path** field.
The **Choose a file** modal is displayed.
5. (Non-RAZ deployment only) Click on your cloud provider, type the following depending on your cloud provider, and press enter:

(AWS): s3a://[***BUCKET-NAME***]

(Azure): abfs://[***CONTAINER-NAME***]

(GCS): gs://[***BUCKET-NAME***]

6. Browse and select the file you want to use to create a table.

Hue displays the preview of the table along with the format.

Hue automatically detects the field separator, record separator, and the quote character from the file. If you want to override a specific setting, then you can change it by selecting a different value from the drop-down menu.

7. Click **Next**.

The table destination and properties are displayed.

8. Under **Extras**, deselect **Store in Default location** and **Transaction table options**.

This is required to create external tables.

9. Select the **Copy file** option.

Selecting this option retains the source file in the original location and creates a copy of the file to create a table.

If you do not select this option, then Hue moves the file from the source location to a new folder, making it unavailable in the original location.

10. Set the table destination, partitions, and change the column data types.

11. Verify the settings and click **Submit** to create the table.

The **CREATE TABLE** query is triggered.

Hue displays the logs and opens the **Table Browser** from which you can view the newly created table when the operation completes successfully.

Related Information

[Enabling S3 File Browser for Hue with RAZ in Cloudera Data Hub](#)

[Enabling ABFS File Browser in Hue with RAZ in Cloudera Data Hub](#)

[Enabling GS File Browser for Hue with RAZ in Cloudera Data Hub](#)

Supported non-ASCII and special characters in Cloudera Data Explorer (Hue)

Auto-generated files may often introduce non-alphanumeric characters in the file and directory names that Hue does not support. This might cause the files or directories to not appear on the Hue File Browser. Review the list of non-alphanumeric, non-ASCII, diacritics (accents) characters supported in Hue for the following operations: upload, create, list in folder, view, and rename.

Table 1: Supported characters on HDFS

Special character symbol	Description	Filename support	Folder name support
~	Tilde	Fully supported	Fully supported
@	Ampersat	Fully supported	Fully supported
\$	Dollar sign	Fully supported	Fully supported
&	Ampersand	Fully supported	Fully supported
(Left paranthesis	Fully supported	Fully supported
)	Right paranthesis	Fully supported	Fully supported
*	Asterisk	Fully supported	Fully supported
!	Exclamation mark	Fully supported	Fully supported
+	Plus	Fully supported	Fully supported
=	Equal	Fully supported	Fully supported
;	Semicolon	Fully supported	Fully supported
,	Comma	Fully supported	Fully supported
.	Period	Fully supported	Fully supported
?	Question mark Not supported with Knox.	Fully supported	Fully supported
'	Apostrophe or single quote	Fully supported	Fully supported
%	Percentage	Fully supported	Fully supported
T#####-ääö	Non-standard alphabets with diacritics and accents.	Fully supported	Fully supported
#	Hash	Partially supported. Not supported for rename operations.	Unsupported
/	Forward slash	Unsupported	Unsupported
\	Backslash	Unsupported	Unsupported
:	Colon	Unsupported	Unsupported

Table 2: Supported characters on S3

Special character symbol	Description	Filename support	Folder name support
(Left paranthesis	Fully supported	Fully supported
)	Right paranthesis	Fully supported	Fully supported
*	Asterisk	Fully supported	Fully supported
!	Exclamation mark	Fully supported	Fully supported
-	Hyphen	Fully supported	Fully supported

Special character symbol	Description	Filename support	Folder name support
_	Underscore	Fully supported	Fully supported
.	Period	Fully supported	Fully supported
'	Apostrophe or single quote	Fully supported	Fully supported
T#####-ääö	Non-standard alphabets with diacritics and accents.	Fully supported	Fully supported
/	Forward slash	Partially supported	Partially supported
&	Ampersand	Partially supported	Partially supported
\$	Dollar sign	Partially supported	Partially supported
=	Equal	Partially supported	Partially supported
@	Ampersat	Partially supported	Partially supported
;	Semicolon	Partially supported	Partially supported
:	Colon	Partially supported	Partially supported
+	Plus	Partially supported. Not supported for create operations on RAZ-enabled environments.	Partially supported
,	Comma	Partially supported	Partially supported
?	Question mark Not supported with Knox.	Partially supported	Partially supported. Not supported for list, upload, and view operations.
\	Backslash	Unsupported	Unsupported
{	Left brace	Unsupported	Unsupported
}	Right brace	Unsupported	Unsupported
^	Caret or circumflex	Unsupported	Unsupported
%	Percentage	Unsupported	Unsupported
~	Tilde	Unsupported	Unsupported
<	Less than sign	Unsupported	Unsupported
>	Greater than sign	Unsupported	Unsupported
#	Hash	Unsupported	Unsupported
"	Quotation mark	Unsupported	Unsupported
`	Grave accent or backtick	Unsupported	Unsupported
]	Right bracket	Unsupported	Unsupported
[Left bracket	Unsupported	Unsupported
	Vertical bar or pipe	Unsupported	Unsupported

Table 3: Supported characters on ABFS

Special character symbol	Description	Filename support	Folder name support
~	Tilde	Fully supported	Fully supported
@	Ampersat	Fully supported	Fully supported
#	Hash	Partially supported. Not supported for view and rename operations.	Unsupported
\$	Dollar sign	Fully supported	Fully supported
&	Ampersand	Fully supported	Fully supported

Special character symbol	Description	Filename support	Folder name support
(Left parenthesis	Fully supported	Fully supported
)	Right parenthesis	Fully supported	Fully supported
*	Asterisk	Fully supported	Fully supported
!	Exclamation mark	Fully supported	Fully supported
+	Plus	Fully supported	Fully supported
=	Equal	Fully supported	Fully supported
:	Colon	Unsupported	Unsupported
;	Semicolon	Fully supported	Fully supported
,	Comma	Fully supported	Fully supported
.	Period	Fully supported	Fully supported
?	Question mark Not supported with Knox.	Partially supported. Not supported for view and rename operations.	Partially supported. Not supported for list, rename, and view operations.
/	Forward slash	Unsupported	Unsupported
\	Backslash	Unsupported	Unsupported
'	Apostrophe or single quote	Fully supported	Fully supported
%	Percentage	Fully supported	Fully supported
T#####-ääö	Non-standard alphabets with diacritics and accents.	Fully supported	Fully supported

Options to rerun Oozie workflows in Cloudera Data Explorer (Hue)

Oozie workflows consume time and resources to run. You can optimize the rerun of a failed Oozie workflow by selecting one of the following two options: “All or skip successful” or “Only failed”. These options enable you to select individual actions within your workflow that you want to rerun.



Important: The option to rerun the an Oozie workflow is enabled in the following conditions:

- In case of an external workflow, the rerun button is enabled if the workflow was run by the same user who is logged in, or if the user is a Hue superuser.
- If the workflow is created in Hue, then the rerun button is enabled only for the user who originally ran the workflow, or for the Hue superuser.

The All or skip successful option enables you to either rerun both the successful and failed actions or skip the actions that ran successfully and run only the failed ones. Using this option, you have more control over selecting the actions that you want to rerun from the list of successfully run actions.

If you select the All or skip successful option but do not select any or all of the successfully run actions, then Hue reruns the whole Oozie workflow.

If you select the All or skip successful option and select some of the successfully run actions, then Hue reruns the selected actions and the failed actions.

Select the Only failed option to only rerun the failed actions within your workflow.

The following image shows the available rerun options on the Hue web interface:

Select actions to rerun

 All or skip successful Only failed

Select all Search

S

 shell-6236

Unsupported features in Cloudera Data Explorer (Hue)

Learn about the Hue features that are not supported by Cloudera.

Unsupported options in Hue Importer

The following options are displayed on the Hue **Importer** page under **SOURCE Path** , but are not supported:

- External Database

Creating an external database using the Hue Importer is not supported. Cloudera recommends that you create a database using a SQL query.

- Manually

Known limitations in Cloudera Data Explorer (Hue)

Review the known limitations in Hue.

Hue has the following limitations:

- Node depth for graphing Oozie workflows because of performance issues. See [Improved Oozie Workflow display of large Graphs](#).
- You must use the Cloudera-provided Apache Load balancer to serve static content, because:
 - It serves static JavaScript, CSS, and Webpack files for client requests and reduces the load from the backend Python web server.
 - The Hue load balancer uses a sticky cookie session to route requests to the same backend as the Python web server, which talks to the same coordinator.
- Hue can only show logs from either Spark1 or Spark2, not both at a time.
- Spark notebook is not supported.
- External RDBMS in the query editor is not supported out of the box by default. Cloudera support will assist on a best-effort basis. Cloudera recommends that you raise issues in the [open-source github](#) community.
- Impala queries stay in the “executing” state so that Hue can display results when users are ready
- We need to limit the amount of data available to download from Hive/Impala because massive downloads cause performance degradation. Multiple simultaneous downloads of result sets could also degrade performance.
- Upstream features and connectors may not function properly in Cloudera. Cloudera recommends that you raise issues in the [open-source github](#) community.