Hortonworks Cybersecurity Platform

User Guide

(May 18, 2018)

docs.cloudera.com

Hortonworks Cybersecurity Platform: User Guide

Copyright © 2012-2018 Hortonworks, Inc. Some rights reserved.

Hortonworks Cybersecurity Platform (HCP) is a modern data application based on Apache Metron, powered by Apache Hadoop, Apache Storm, and related technologies.

HCP provides a framework and tools to enable greater efficiency in Security Operation Centers (SOCs) along with better and faster threat detection in real-time at massive scale. It provides ingestion, parsing and normalization of fully enriched, contextualized data, threat intelligence feeds, triage and machine learning based detection. It also provides end user near real-time dashboards.

Based on a strong foundation in the Hortonworks Data Platform (HDP) and Hortonworks DataFlow (HDF) stacks, HCP provides an integrated advanced platform for security analytics.

Please visit the Hortonworks Data Platform page for more information on Hortonworks technology. For more information on Hortonworks services, please visit either the Support or Training page. Feel free to Contact Us directly to discuss your specific needs.



Except where otherwise noted, this document is licensed under Creative Commons Attribution ShareAlike 4.0 License. http://creativecommons.org/licenses/by-sa/4.0/legalcode

Table of Contents

1. Overview	1
2. Introduction to Metron Dashboard	. 2
2.1. Functionality of Metron Dashboard	. 2
2.2. Metron Default Dashboard	4
2.2.1. Events	4
2.2.2. Enrichment	. 4
2.2.3. YAF	. 5
2.2.4. Snort	5
2.2.5. Web Request Header	
2.2.6. DNS	
3. Customizing Your Metron Dashboard	8
3.1. Launching the Metron Dashboard	
3.2. Changing the Metron Dashboard Background Color	
3.3. Adding a New Data Source	
3.3.1. Prerequisites	
3.3.2. Configuring a New Data Source Index	
3.3.3. Reviewing the New Data Source Data	
3.4. Querying, Filtering, and Visualizing Data	
3.5. Customizing Your Dashboard	
4. Sharing the Metron Dashboard	
5. Triaging Alerts	
5.1. Launching the Alerts User Interface	
5.2. Viewing Alerts	
5.2.1. Using the Alerts Table	
5.2.2. Searching Alerts	
5.2.3. Filtering Alerts	
5.2.4. Managing Alert Status	
5.2.5. Grouping Alerts	
5.2.6. Creating a Meta Alert	
5.3. Saving Your Searches	
5.4. Viewing Your Recent and Saved Searches	
6. PCAP	
6.1. Capturing pcap Data	
6.2. Processing pcap Data	
6.3. Viewing pcap Data	
6.4. Filtering pcap Data	
6.4.1. Using CLI to Query pcap Data	
6.4.2. Using REST API to Query pcap Data	
6.5. Porting pcap Data to Another Application	

List of Figures

2.1. Dashboard-Snort Panel	. 2
2.2. Events	. 4
2.3. Enrichment	. 5
2.4. YAF	
2.5. Dashboard-Snort Panel	
2.6. Dashboard-Bro Panel	. 6
2.7. Dashboard-DNS Panel	
3.1. Ambari Task List	8
3.2. Configure an Index Pattern	10
3.3. Discover Tab with Squid Elements	11
5.1. Alerts Configure Table	17
	18
5.3. Alerts Information Panel	19
5.4. Searches Field	20
	21
	24
	26
5.8. Alerts Information Panel	31
5.9. Searches Panel	32

List of Tables

3.1. Querying, Filtering, and Visualizing Data	11
4.1. Sharing the Metron Dashboard	13
5.1. Alerts UI Tools and Purposes	14

1. Overview

This guide is intended for use by Security Operations Center (SOC) analysts and investigators.

This guide describes two user interfaces and a tool included with HCP that are designed for the SOC analysts and investigators:

Metron Dashboard

This user interface is for Elasticsearch users only. If you are using Solr, refer to the Solr documentation for information on the user interface.

A Kibana-based dashboard designed to identify, investigate, and analyze cybersecurity data. The Metron dashboard displays all of the data on a single dashboard enabling you to filter through the irrelevant data and display just the information, alerts, and context for which you are looking.

Refer to the following chapters:

- Introduction to the Metron Dashboard
- Customizing Your Metron Dashboard
- Alerts User Interface

This GUI is a standalone user interface that connects to Solr or Elasticsearch to show the alerts but also store all other data in the browser cache.

Refer to the following chapter:

- Triaging Alerts
- pcap

The pcap data source can rapidly ingest raw data directly into HDFS from Kafka. As a result, you can store all of the raw packet capture data in HDFS and review or query it at a later date.

Refer to the following chapter:

• PCAP

2. Introduction to Metron Dashboard

This chapter describes the Metron dashboard which is a component of Hortonworks Cybersecurity Platform (HCP) powered by Apache Metron. This next chapter provides instructions on setting up and modifying the dashboard. It also provides instructions on querying and viewing pcap information.

This chapter contains the following information:

- Functionality of Metron Dashboard [2]
- Metron Default Dashboard [4]

2.1. Functionality of Metron Dashboard

The Metron dashboard is a Kibana-based dashboard designed to identify, investigate, and analyze cybersecurity data. HCP supports Kibana 4.x. Kibana is an open source analytics and visualization platform.

The Metron dashboard displays all of the data on a single dashboard enabling you to filter through the irrelevant data and display just the information, alerts, and context for which you are looking. The Metron dashboard has several advantages over conventional SIEM tools, including flexibility, and the single pane of glass approach that displays all of the data on the same screen, requiring no jumping from console to console to gather the information.

Snort		≠ ×		Snort Alerts						××
System (NIDS) that	is a Network Intrusion Detection m (NIDS) that is being used to generate identifying known bad events. Snort on a fixed set of rules that act as ures for identifying abnormal events.			Time -	msq	sig_id	1 2 3 4 5	10 -	ip det addr	ip_d
relies on a fixed s			•	June 21st 2016, 11:21:44.769	"snort test alert "	999,158	95.163.121.204	80	192.168.138.158	49,2
			•	June 21st 2016, 11:21:44.640	"snort test alert"	999,158	192.168.138.158	49,209	95.163.121.204	80
📰 Snort Alert Ty	pes	/ ×	•	June 21st 2016, 11:21:44.552	"snort test alert"	999,158	192.168.138.158	49,189	62.75.195.236	80
	4		•	June 21st 2016, 11:21:44.529	"'snort test alert"	999,158	192.168.138.158	49,206	95.163.121.204	80
	1		•	June 21st 2016, 11:21:44.390	"snort test alert"	999,158	82.75.195.236	80	192.168.138.158	49,1
A	Vert Type(s)		•	June 21st 2016, 11:21:42.398	"snort test alert"	999,158	192.168.138.158	49,209	95.163.121.204	80
Top Alerts By	Host	/ ×	•	June 21st 2016, 11:21:42.277	"snort test alert"	999,158	95.163.121.204	80	192.168.138.158	49,2
Source 0 Q	Destination		,	June 21st 2016, 11:21:41.086	"snort test	999,158	72.34.49.86	80	192.168.138.158	49,2
62.75.195.236	192.168.138.158									
192.168.138.158	0211011001200	1,253	'	June 21st 2016, 11:21:41.061	"'snort test alert"	999,158	192.168.138.158	49,202	72.34.49.86	80
	38.158 95.163.121.204 321 38.158 72.34.49.86 284		,	June 21st 2016, 11:21:40.880	"snort test	999,158	72.34.49.86	80	192.168.138.158	49,2
	^				alert."					

Figure 2.1. Dashboard-Snort Panel

HCP supports two types of messages: metadata and alerts. By convention there should be one panel per metadata telemetry and one panel that is a "catch all" panel for alerts. The Snort panels are a good example of these two panel types. However, the Snort alerts panel only lists alerts from Snort because the default Metron dashboard contains only one data source that produces alerts.

When HCP parses the telemetry data on ingest, it extracts and normalizes different parts of the message into a standard Metron JSON. Standardizing and normalizing field names and format allows HCP to search different telemetry messages with a single query.

The first telemetry type that HCP supports is metadata messages. Metadata messages are parsed enriched messages in the JSON format.

The second telemetry type that HCP supports is alerts telemetries. Alerts telemetries come from IDS sensors like Snort or mixed telemetries like application logs that contain some metadata and some alert messages. While it is possible to set up a new panel for each alert telemetry, it is more desirable to set up a single panel that contains all of the alerts. This guarantees that the query will pull in alerts from multiple telemetries (even mixed mode telemetries that have some metadata and some alerts associated with them). You can then set up a detailed table containing only the alerts. To set telemetry as alert you need to set is_alert = true. This is already set up for HCP under the "Alerts" table.

The fields displayed for each alerts table can be customized. Ideally you want the fields of most importance (as well as the standard fields that telemetries are correlated on) to be displayed.

The following table contains a description of each of the Kibana components in the Metron dashboard.

Area Chart Panel	You can use the area chart panel for stacked timelines for which you want to see the total.
Data Table Panel	Use the data table panel to provide a detail breakdown, in tabular format, of the results of a composed aggregation. You can generate a data table from many other charts by clicking the grey bar at the bottom of the chart.
Detailed Message Panel	A detailed message panel displays the raw data from your search query.
Document Table	When you submit a search query, the 500 most recent documents that match the query are listed in the Documents table which is displayed in the center of the Discover window.
Field List	A list of all of the fields associated with a selected index pattern. This list is displayed on the left side of the Discover window.
Line Chart Panel	Use the line chart when you want to display high density time series. This chart is useful for comparing one series with another.
Mark Down Widget Panel	You can use the mark down widget panel to provide explanations or instructions for the dashboard.
Metric Panel	You can use a metric panel to display a single large number such as the number of hits or the average of a numeric field.
Pie Chart Panel	A pie chart is a circular statistical graphic that is ideal for displaying the parts of some whole.

Tile Map Panel	The tile map panel type displays a map populated with your search results. This panel type requires a Solr or Elasticsearch geo_point field that is mapped as type:geo_point with latitude and longitude coordinates.
Vertical Bar Chart Panel	You can use the vertical bar chart panel to display histograms. Histogram panels represent ingest rates for each individual telemetry. By convention, you should set up one for each type.

2.2. Metron Default Dashboard


The default telemetry data sources installed with HCP help highlight the useful components available in Kibana 4. The default Metron dashboard serves as a starting point for you to build your own customized dashboards. During installation, HCP sets up several telemetry data sources bundled with the platform and creates panels to display the associated data.

- Events [4]
- Enrichment [4]
- YAF [5]
- Snort [5]
- Web Request Header [6]
- DNS [6]

2.2.1. Events

The first panel in the dashboard highlights the variety of events being consumed by HCP. It shows the total number of events received, the variety of those events, and a histogram showing when the events were received.

Figure 2.2. Events

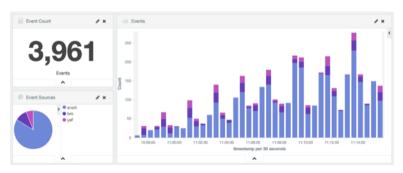


2.2.2. Enrichment

The next set of dashboard panels shows how HCP can be used to perform real-time enrichment of telemetry data. All of the IPv4 data received by HCP was cross-referenced

against a geo-ip database. These locations were then used to build this set of dashboard components.

Figure 2.3. Enrichment

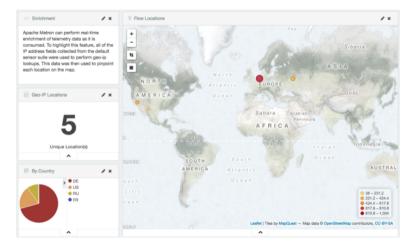

2.2.3. YAF

As part of the default sensor suite, YAF is used to generate flow records. These flow records provide significant visibility into which actors are communicating over the target network. A table panel displays the raw details of each flow record. A histogram of the duration of each flow illustrates that while most flows are relatively short-lived there are a few that are much longer in this example. Creating an index template that defined this field as numeric was required to generate the histogram.

Figure 2.4. YAF

> YAF	××	YAF					/ >
YAF can be used to generate Netflow-like flow records. These flow records provide		Time	ip_src_addr	ip src port	1 2 3 4 5 ip_dst_addr	8 -	protocol
ignificant visibility of the acto ommunicating over the targe		 June 21st 2016, 11: 	11:35.878 192.168.138.158	50,509	192.168.138.2	53	UDP
		June 21st 2016, 11:	11:30.092 192.168.138.158	50,683	192.168.138.2	53	UDP
		 June 21st 2016, 11: 	11:29.303 192.168.138.158	60,078	192.168.138.2	53	UDP
YAF Flows	/ ×	 June 21st 2016, 11: 	11:30.092 192.168.138.158	65,315	192.168.138.2	53	UDP
TAF Flows	/ ×	 June 21st 2016, 11: 	11:35.225 192.168.138.158	53,571	192.168.138.2	53	UDP
		 June 21st 2016, 11: 	11:35.641 192.168.138.158	61,720	192.168.138.2	53	UDP
362	2	 June 21st 2016, 11: 	11:36.064 192.168.138.158	56,753	192.168.138.2	53	UDP
		June 21st 2016, 11:	12:13.923 192.168.138.158	50,329	192.168.138.2	53	UDP
Count		 June 21st 2016, 10: 	54:49.185 192.168.138.158	40,186	62.75.195.236	80	TCP
^		 June 21st 2016, 11: 	11:30.250 192.168.138.158	49,186	62.75.195.236	80	TCP
. Flow Duration	/ ×	 June 21st 2016, 11; 	05:14.851 192.168.138.158	49,186	62.75.195.236	80	TCP
100	<	 June 21st 2016, 11; 	07:19.985 192.168.138.158	49,186	62.75.195.236	80	TCP
100 -		 June 21st 2016, 10: 	58:59.455 192.168.138.158	49,186	62.75.195.236	80	TCP
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000000	 June 21st 2016, 11: 	19:50.779 192.168.138.158	49,186	62.75.195.236	80	TCP
0.000 0.000	કરે પર્ય પ્રદે પર્ય પ્રદે પ્રદે પ્રદે	 June 21st 2016, 11: 	15:40.515 192.168.138.158	49,186	62.75.195.236	80	TCP
Flow Duration (s	econds)	 June 21st 2016, 10: 	56:54.323 192.168.138.158	49,186	62.75.195.236	80	TCP

2.2.4. Snort

Snort is a Network Intrusion Detection System (NIDS) that is being used to generate alerts identifying known bad events. Snort relies on a fixed set of rules that act as signatures for identifying abnormal events. Along with displaying the relevant details of each alert, the

panel shows that there is only a single unique alert type; a test rule that creates a Snort alert on every network packet. Another table was created to show source/destination pairs that generated the most Snort alerts.

Figure 2.5.	Dashboard-Snort Panel
-------------	-----------------------

Short	Snort Alerts					×
Snort is a Network Intrusion Detection System (NIDS) that is being used to general alerts identifying known bad events. Snort	Time -	msg sig_id		ip_src_port	ip_dst_addr	ip_dr
relies on a fixed set of rules that act as signatures for identifying abnormal events.	 June 21st 2016, 11:21:44.769 	"isnort test 999,158 alert."	95.163.121.204	80	192.168.138.158	49,2
	 June 21st 2016, 11:21:44.640 	"snort test 999,158 alert"	192.168.138.158	49,209	95.163.121.204	80
E Snort Alert Types	 June 21st 2016, 11:21:44.552 	"snort test 999,158 alert"	192.168.138.158	49,169	62.75.195.235	80
-	 June 21st 2016, 11:21:44.529 	"snort test 999,158 alert"	192.168.138.158	49,206	95.163.121.204	80
	 June 21st 2016, 11:21:44.390 	"snort test 999,158 alert"	62.75.195.236	80	192.168.138.158	49,1
Alert Type(s)	 June 21st 2016, 11:21:42.398 	"snort test 999,158 alert"	192.168.138.158	49,209	95.163.121.204	80
Top Alerts By Host	 June 21st 2016, 11:21:42.277 	"snort test 999,158 alert"	95.163.121.204	80	192.168.138.158	49,2
Source © Q Destination © Q Count 62.75.195.236 192.168.138.158 2.201	 June 21st 2016, 11:21:41.086 	"snort test 999,158 alert"	72.34.49.86	80	192.168.138.158	49,2
192.168.138.158 62.75.195.236 1,253 192.168.138.158 95.163.121.204 321	June 21st 2016, 11:21:41.061	"isnort test 999,158 alert"	192.168.138.158	49,202	72.34.49.86	80
192.168.138.158 72.34.49.86 284	 June 21st 2016, 11:21:40.880 	"snort test 999,158 alert"	72.34.49.86	80	192.168.138.158	49,2

2.2.5. Web Request Header

The Bro Network Security Monitor extracts application-level information from raw network packets. In this example, Bro is extracting HTTP and HTTPS requests being made over the network. The panels highlight the breakdown by request type, the total number of web requests, and raw details from each web request.

Figure 2.6. Dashboard-Bro Panel

Web Request Header X		Web Requests				/ ×
The Bro Network Security Monitor is extracting application-level information from		Time -	method	host	1 2 3 4 t	reterrer
aw network packets. In this example, Bro is extracting HTTP(S) requests being made						
over the network.	•	June 21st 2016, 11:20:53.147	GET	7oqnsnzwwm6zb7y.giga paysun.com	/img/button_pay.png	http://?oqnsnzwwnm6zb7y.g gapaysun.com/11iQmfg
Web Requests 🖌 🗶		June 21st 2016, 11:20:53.146	GET	7oqnsnzwwnm6zb7y.giga paysun.com	/img/bitcoin.png	http://7oqnsnzwwnm6zb7y.g gapaysun.com/11iQmfg
445						
Count	•	June 21st 2016, 11:20:51.040	GET	7oqnsnzwwnm6zb7y.giga paysun.com	/img/style.css	http://7ognsnzwwnm6zb7y.g gapaysun.com/11iQmfg
^				payaon.com		gapayauncomentiamig
🕲 Web Request Type 🛛 🖌 🗙						
GET POST						
	•	June 21st 2016, 11:20:48.304	POST	7oqnsnzwwnm6zb7y.giga paysun.com	/11iQmlg	http://?oqnsnzwwnm6zb?y.g gapaysun.com/11iQmfg
^						

2.2.6. DNS

Bro extracts DNS requests and responses being made over the network. Understanding who is making those requests, the frequency, and types can provide a deep understanding of the actors present on the network.

Figure 2.7. Dashboard-DNS Panel

DNS Requests	≠×		DNS Requests					≠ ×
Bro is extracting DNS requests responses being made over th	e network.		Time -		1 2 -		ip are addr	la det e
Understanding who is making			Time -	query	qtype_name	answers	ip_src_sdar	ip_dst_s
requests, the frequency, and ty provide a deep understanding present on the network.		,	June 21st 2016, 11:20:34.452	7oqnsnzwwnm6zb7y.giga paysun.com	A	95.163.121.204	192.168.138.158	192.168
		•	June 21st 2016, 11:19:56.592	comarksecurity.com	A	72.34.49.86	192.168.138.158	192.168
		,	June 21st 2016, 11:19:56.407	kritischerkonsum.uni-	A		192.168.138.158	192.168
DNS Requests	/ ×			koein.de				
		•	June 21st 2016, 11:19:56.169	runiove.us	A	204.152.254.221	192.168.138.158	192.166
00	00	•	June 21st 2016, 11:19:55.753	ip-addr.es	A	188.165.164.184	192.168.138.158	192.16
96 Count		•	June 21st 2016, 11:19:50.622	r03afd2.c3008e.xc07r. b0t.a39.h7t0fa5eu.vb8 fbLe8mtzdgrf7g0.grou pprograms.in	A	62.75.195.236	192.168.138.158	192.166
^		•	June 21st 2016, 11:19:60.621	ubb67.3c147o.u808a4.w 07d919.o5f.f1.b80w.r0 faf9.e8mfzdgrf7g0.gro upprograms.in	A	62.75.195.236	192.168.138.158	192.166
		•	June 21st 2016, 11:19:49.832	va872g.g90e1h.b8.642b 63u.j985a2.v33e.37.pa 269cc.e8mfzdgrf7g0.gr oupprograms.in	A	62.75.195.236	192.168.138.158	192.16
		•	June 21st 2016, 11:18:29.320	7oqnsnzwwnm6zb7y.giga paysun.com	A	95.163.121.204	192.168.138.158	192.16

3. Customizing Your Metron Dashboard

This chapter discusses customizing the Metron dashboard to display information, alerts, and the context you need to identify and analyze cybersecurity issues. For more information, see the Kibana User Guide.

This chapter provides the following information:


- Launching the Metron Dashboard [8]
- Changing the Metron Dashboard Background Color [9]
- Adding a New Data Source [9]
- Querying, Filtering, and Visualizing Data [11]
- Customizing Your Dashboard [12]

3.1. Launching the Metron Dashboard

You can launch the Metron Dashboard two ways:

• From Ambari, click Kibana in the list of quick tasks.

Figure 3.1. Ambari Task List

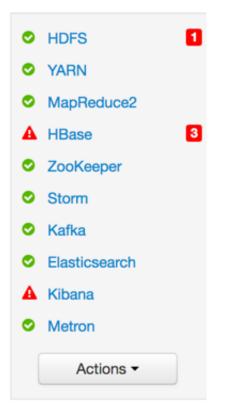

• Enter the following text in a browser:

\$KIBANA_HOST:9995

3.2. Changing the Metron Dashboard Background Color

You can choose to view the Metron dashboard with either a light or dark background. The dark background is sometimes preferred in a dimly lit security operations center. To switch the background color, perform the following steps:

1. Click the Gear icon () in the top right of the Metron dashboard.

You should see a check box next to Use dark theme near the top of the dashboard.

2. Select the check box to use the dark theme for the dashboard.

To return to the light theme, clear the check box.

3.3. Adding a New Data Source

After a new data telemetry source has been added to HCP, you will need to also add it to the Metron dashboard before you can create queries and filters for it and add telemetry panels displaying its data. Complete the steps in the following sections to add a new telemetry source to the Metron dashboard:

- Prerequisites [9]
- Configuring a New Data Source Index [9]
- Reviewing the New Data Source Data [10]

3.3.1. Prerequisites

Before you can add a new data telemetry source to the Metron dashboard, you must complete the following steps:

• The data telemetry source must be added to HCP.

For information on how to add a new data telemetry source, see Adding a New Telemetry Data Source.

• An index template must be created for the data telemetry source.

For information on how to create an index template, see Creating an Index Template.

3.3.2. Configuring a New Data Source Index

Now that you have an index for the new data source with all of the right data types, you need to tell the Metron dashboard about this index.

- 1. Click the **Settings** tab on the Metron dashboard.
- 2. Make sure you have the Indices tab selected, then click +Add New.

Kibana displays the **Configure an index pattern** window. Use the index pattern window to identify your telemetry source.

Figure 3.2. Configure an Index Pattern

Configure an index pattern In order to uak Kbara you must configure at least one index patterns, index patterns are used to identify the Elasticsearch index to run search and analytics against. They are also used to configure fields.
Index contains time-based events
Use event times to create index names (DEPRECATED)
Index name or pattern
Patterns allow you to define dynamic index names using * as a wildcard. Example: logstash-*
logalash-*
Do not expand index pattern when searching (Not recommended)
By default, searches against any time-based index pattern that contains a wildcard will automatically be expanded to query only the indices that contain data within the currently selected time range.
Searching against the index pattern logstash-* will actually query elasticsearch for the specific matching indices (e.g. logstash-2015.12.21) that fail within the current time range.
Unable to fatch mapping. Do you have indices matching the pattern?

3. In the **Index name or pattern** field, enter the name of the index pattern of your data telemetry source.

In most cases the name of the index pattern will match the sensor name. For example, the 'bro' sensor has an index pattern of 'bro-*'.

4. If your data telemetry source **does not** contain time-based events, clear the **Index contains time-based events** check box.

If your data telemetry source does contain time-based events, leave the check box as is. Most of your data telemetry sources will contain time-based events.

5. Click **Create** to add the index pattern for your new data telemetry source.

If you would like this new index pattern to be the default, click the Green Star icon (

3.3.3. Reviewing the New Data Source Data

Now that the Metron dashboard is aware of the new data source index, you can look at the data.

- 1. Click on the **Discover** tab and then choose the newly created data source index pattern.
- 2. Click any of the fields in the left column to see a representation of the variety of data for that specific field.
- 3. Click the Right Facing Arrow icon next to a specific record in the center of the window (the **Document** table) to expand the record and display the available data.

Figure 3.3. Discover Tab with Squid Elements



3.4. Querying, Filtering, and Visualizing Data

You can interactively explore your data source data using the Metron dashboard. When HCP parses a telemetry, it extracts and normalizes different parts of the message into a standard Metron JSON object. Standardizing and normalizing field names and formats allows HCP to search different telemetry messages with a single query. You have access to every document in every index that matches your selected index patterns. The Metron dashboard enables you to submit search queries on the data source data, filter the search results, and view the results in a number of visualizations.

In HCP, if telemetry indexing is enabled, a rotating index for every telemetry is created. By convention this index will have a name [telemetry_name]_[timestamp]. Telemetry documents indexed into this index will by convention be called [telemetry_name]_doc. Queries reference the document type of the indexed telemetries.

For more information about exploring and analyzing your data, refer to the Kibana documentation:

Task	Description	Where to Look
Querying your data	You can search and refine the data you receive from your data source by creating a query from the Discover page. You should create and save a query for each data source not provided by HCP. HCP includes queries for the following telemetries: • YAF • Bro • Alerts (populated by Snort)	Discovering Your Data
	You can also add custom queries for new telemetry types.	
Filter your query results	You can use the Metron dashboard to filter your query results to further refine the	Discover

Table 3.1. Querying, Filtering, and Visualizing Data

Task	Description		Where to Look	
	information. The two types of filter	Metron dashboard provides s:		
	Time Filter	Restricts the search results to a specific time period.		
	Filter by Field	Filters to display only those documents that contain a particular value in a field. You can filter either from the Fields list or the Documents table.		
Visualizing your data	those documents value in a field. Yo	rch results to display only that contain a particular ou can also create negative e documents that contain value.	Visualize	

3.5. Customizing Your Dashboard

The visualizations in your Metron dashboard are stored in resizeable containers that you can arrange on the dashboard. For more information about customizing your dashboard, see Building a Dashboard.

4. Sharing the Metron Dashboard

You might want to share the queries and visualizations you've set up with other SOC personnel.

Table 4.1. Sharing the Metron Dashboard

Task	Description	Where to Look	
Exporting search information	You can export the contents of a query or search. This option can be very useful after you've refined your search to display only the relevant information for a cybersecurity issue and you would like to send this information to another SOC team member.	Sharing a Dashboard	
Importing search information	You can import the contents of a query or search. This option can be very useful if you need to view a colleague's refined search for a cybersecurity issue.	Loading a Dashboard	

5. Triaging Alerts

Any event that triggers your threat intelligence thresholds will trigger an alert. These alerts are how you are notified that an event needs your attention. HCP provides a graphics user interface (GUI) to view these alerts. This GUI is a standalone user interface that connects to Solr or Elasticsearch to show the alerts but also stores all other data in the browser cache. This chapter covers launching and using the Alerts user interface to identify and track cybersecurity issues:

- Launching the Alerts User Interface [14]
- Viewing Alerts [14]
- Saving Your Searches [31]
- Viewing Your Recent and Saved Searches [32]

5.1. Launching the Alerts User Interface

The Alerts user interface is bundled with HCP and installed with the Ambari management pack.

Prerequisite:

- Solr or Elasticsearch must be up and running and should have alerts populated by HDP topologies.
- The Alerts UI defaults to port 4201. If you are already using port 4201 for another purpose, you must change the default port for the Alerts UI to another port number.

To display the Alerts user interface, complete the following steps:

- 1. Display the **Ambari** user interface.
- 2. In the Services pane, select Metron.
- 3. From the Quick Links menu, choose Alerts UI.



Note

There is no login module for the Alerts UI.

5.2. Viewing Alerts

The Alerts user interface defaults to displaying the Alerts table when first opened. You can modify the alerts displayed in the Alerts table to help identify issues.

Table 5.1. Alerts UI Tools and Purposes

Tools	Description	More Information			
Alerts table	The Alerts table displays the alerts	Using the Alerts Table [15]			
	generated by the HCP framework.				

Tools	Description	More Information
	The Alerts UI polls for alerts and refreshes the Alerts table at an interval that you can configure.	
Searches field	You can search for alerts using the search bar above the Alerts table. The search tool follows the Lucene syntax which supports a rich query language.	Searching Alerts [20]
Filters	The Alerts UI currently provides five filters that you can apply to alerts. You can use these filters to refine the list of alerts and collect additional information on the alerts.	Filtering Alerts [21]
Alert status	You can change the status of or dismiss an alert.	Managing Alert Status [23]
Group By	You can group alerts so you can apply filters, status, etc. on multiple alerts at a time.	Grouping Alerts [27]
Meta Alerts	The meta alert feature enables you to create a system entity that contains a collection of filtered alerts.	Creating a Meta Alert

5.2.1. Using the Alerts Table

The Alerts table displays the alerts generated by the HCP framework. The Alerts UI polls for alerts and refreshes the Alerts table at an interval that you can configure (see Customizing the Alerts Table). This polling is paused whenever you open any configuration panels or use the **Searches** field.

By default, the alerts table shows the recent alerts at the top. For example, alerts are sorted descending on timestamp. For information on modifying these configurations, see Customizing the Alerts Table.

The Alerts table also provides the threat intelligence score for each alert. Next to the score is a bar that indicates the severity of the score:

Red A score of 69 or higher

Orange A score between 39 and 69

Yellow A score below 39

anace									
METRON							Log	ged in as admin-	
Verts (265379)									nons -
	Group By 2 sourcetype		10 M.,eddr		0		9 10.000		
		timestamp #	source:type 0	lp,arc,addr 9		ip,det,addr #		elert_status 9	
	 829ed3f5-6a51eb0bdee 								
	- de53d302-b2fefcc094d								
	Ober55c9-334dc1F9525							DISMISS	
	13b7509a-0e989369b8b	2017-09-31 11:47:55		192.168.138.158					
	e4956536-02fcb707c67	2017-08-31 11:47:55		192.168.66.1		192.168.66.121	node1		
		2017-08-31 11:47:55							
	2270eb9a-6ac2099d14b	2017-08-31 11:47:55				72.34.49.86			
	1e31b227-02132x0ea69	2017-08-31 11:47:55							
	b8a57d9e1ae8b0b0256	2017-08-31 11:47:55		192.168.66.1					
	9958(181-c473(954056	2017-08-31 11:47:55		192.168.138.158		95.163.121.204			
	- b73666a8-6_219689109d	2017-08-31 11:47:38							
	17c2c850-cdd5ad97ca8	2017-08-31 11:47:38		192.168.66.1					
	76423098-49539380.832	2017-08-31 11:47:38		192.168.138.158		62.75.195.236			
	9df6bd71-1_999ed974e6	2017-08-31 11:47:38		192.168.138.158		95.163.121.204			
	 cbcod34a-bb2bbd74b9a 	2017-08-01 11:47:08		192.168.66.1		224.0.0.251			
	 20390982-d4%1d3149e 	2017-08-31 11:47:38		192.168.138.158					
	- 8592e071-4r58e0ca119	2017-08-31 11:47:38		192.168.138.158		95.163.121.204	Zognanzwwn_payaun.com		
	 567x3954-7_exad99326f 	2017-08-31 11:47:38							
	 clu5cbda-811be5a243a 	2017-08-31 11:47:38		192.168.66.1		192.168.66.121	nodel		
	 b60c97c2-0635cb58726 	2017-08-01 11:47:08		192.168.138.158		62.75.195.236	62.75.195.236		
	If05f0od-5_bcbb004ld2 to 30b004ld2	2017-08-31 11:47:26				62.75.195.236	r03afd2.c3_rograme.in		
	4e31b7le-963d3f530d8 320e60d-9ef860b7c14	2017-08-31 11:47:26		192.168.138.158		95.163.121.204 224.0.0.251	7oqnanzwwnpayaun.com		
	 320ate0d-9c10600/c14 767203af-cecb8e6c5e9 	2017-08-31 11:47:26 2017-08-31 11:47:26		192.168.66.1 192.168.138.158		224.0.0.251 95.163.121.204	Transmiss particular		
	6ca1bd62-6d4d5204765	2017-08-31 11:47:26		192.168.66.1		192.168.66.121	7oqnanzwwn_paysun.com		
	6c8=0062-60405204765	2017/08/01 11:47:28		1942, 108,00,1		192,106.00,121	node1		



Note

The Alerts table shows only the columns that can be displayed in its horizontal view port. Any additional columns are displayed using ellipses. These hidden columns are visible if the UI is opened in a display that has a wider view port.

5.2.1.1. Customizing the Alerts Table

You can configure both the table columns and the table row settings in the Alerts table.



Note

The Alerts UI polling is paused whenever you open a configuration panel, such as Configure Table or Settings.

Configure Table Columns

Use this feature to customize the type of information you display in the Alerts table. You can modify the information that shows in each column, the title of the column, and the order in which the columns are displayed.

To modify the column information in the Alerts table, complete the following steps:

1. Click (gear icon).

The Alerts UI displays the Configure Table that lists all the columns available across all the valid search indexes.

Cor	nfigure Table				×
	Field	Short Name	Туре		
۰	Score		STRING		-
	AA		BOOLEAN		~
	adapter:geoadapter:begin:ts		STRING	^	*
	adapter:geoadapter:end:ts		STRING	^	*
	adapter:hostfromjsonlistadapter:begin:ts		STRING	^	*
	adapter:hostfromjsonlistadapter:end:ts			^	*
	adapter:threatinteladapter:begin:ts		STRING	^	*
	adapter.threatinteladapter.end.ts		STRING	^	*
۰			STRING	^	*
۵	timestamp		DATE	^	*
۰	source:type		STRING	^	*
۵	ip_src_addr			^	*
۵	enrichments:geo:ip_dst_addr:country		STRING	^	~
۵	ip_dst_addr			^	*
۰	host		STRING	^	*
۰	alert_status		STRING	^	*
	answers		STRING	^	*
	bro_timestamp		STRING	^	*
	comments			^	*
	dgmlen		STRING	^	*
	enrichmentjoinbolt:joiner:ts		STRING	^	*
	enrichments:geo.ip_dst_addr.city		STRING		*
	SAVE CANCEL				

Figure 5.1. Alerts Configure Table

- 2. Select the fields you want to display and unselect the fields you do not want to display.
- 3. You can rename the column titles by entering a new name in the **Short Name** column. For example, 'enrichments:geo:ip_dst_addr:country' can be renamed to 'Dst Country'.

This is just for display convenience and the changes are not propagated to any system in HCP.

- 4. You can also configure the order in which the selected columns will appear in the table by using the arrow icons.
- 5. Click Save to save your changes and dismiss the Configure Table panel.
- You can pause the Alerts UI polling by clicking the III (pause button).

Configure Table Row Settings

Use this feature to modify the appearance of the Alerts table and the refresh rate. To modify the Alerts table row settings, complete the following steps:



Note

Settings are not saved in a saved search. These settings are global.

1.

Click the **settings** (slides icon) at the top of the table to display the Settings dialog box.

Figure 5.2. Alerts Settings Panel

Set	Settings										
REF	REFRESH RATE										
5	s 10	s 15s	30s	1m	10m	1h					
RO	NS PER F	PAGE									
1	0 2	5 50	100	250	500	1000					
•	HIDE Resolved Alerts HIDE Dismissed Alerts										

- 2. To modify the rate at which the Alerts table is refreshed with new alert information, choose a value under **Refresh Rate**.
- 3. To modify the number of rows displayed in the Alerts table, choose a value under **Rows Per Page**.



Note

The number of rows that are visible in the Alerts table is restricted by the size of your browser window.

4. To hide resolved alerts or dismissed alerts, click the slide button next to the appropriate action.

HIDE Resolved Alerts and HIDE Dismissed Alerts are non-functional features in this release.

5.2.1.2. Displaying Additional Alerts Information

In addition to displaying alert information in the Alerts table, you can display all the information about the alert in Solr or Elasticsearch in a separate panel.

To display this additional information about the alert, complete the following steps:

1. Select an alert by clicking on empty space in the alert row.

The Alerts UI displays a panel listing all available data in Solr or Elasticsearch about the alert.

Figure 5.3. Alerts Information Panel


AVuKz1_n1l	LEanKS6qb	tb 🗙	
Status	ESCALATE		
NEW	OPEN	DISMISS	
	RESOLVE		
	OPE	N	
	40		
	ip_sr Pho	enix	
	ip_sr US		
enrichments:geo c_addr:dmaCode			
		499	
	tip_sr 530	8655	
enrichments:geo c_addr:location_g		499,-112.0712	
		.0712	
	-114 -114		
	:ip_sr 850	04	
c_addr:postalCoo			
	00:00	0:00:00:00:00	
	0x30		
		0:00:00:00:00	
		a8dec-278f-4f9f- 5-e98f6f4c1983	
	190		
	192.	168.138.158	
	491	97	

2. The Status states at the top of the panel display the current status of the alert.

5.2.2. Searching Alerts

You can search for alerts using the search bar above the Alerts table. The search tool follows the Lucene syntax which supports a rich query language. For more information, see Apache Lucene - Query Parser Syntax.

1. To search on an item that is displayed in the Alerts table, simply click on the item and it will display in the **Searches** field.



2. You can also directly type in the **Searches** field to enter search criteria.

For example, you can enter **source:type:snort**.

- 3. To remove an item in the **Searches** field, mouse over the information in the **Searches** field until an **x** appears at the end of the text. Click on the **x** to remove the search filter and the operator following or preceding it.
- 4. To clear the entire **Searches** field, click the **x** at the end of the field.
- 5. You can specify the time range of your search by using the time range selector on the far right of the **Searches**

field.



Note

The time-range selector is not available if you put a timestamp in the **Searches** field.

The time-range button defaults to **All time** which displays all alerts corresponding to the Searches parameters. To customize the time range, click the time-range drop-down menu and select one of the following:

Time Range	Enables you to choose the start and end dates and times for your search.
Quick Ranges	Provides a list of pre-specified time ranges that you can choose.

Figure 5.5. Time Selector Dialog Box

Time Range	Quick Ranges		
now/d			
now/d			
APPLY	Last 2 years	All time	

After you make your choice, the time-selector label will reflect your selection.



5.2.3. Filtering Alerts

The Alerts UI currently provides five filters that you can apply to alerts. You can use these filters to refine the list of alerts and collect additional information on the alerts. These filters are listed in the **Filters** panel on the left of the **Alerts** window:

- source.type
- ip_src_addr
- ip_dist_addr
- host
- enrichments:geo_dst_addr:country

To apply filters to alerts, complete the following steps:

1. Click one of the filters in the **Filters** panel on the left of the window.

The Filter expands to list all of the facet values contained in the filter. For example, in the following figure, the **enrichments:geo_dst_addr:country** filter contain the countries Russia, France, and USA.

(B) 10105															
METRO	N									0	829ed316-603	34-4969-91c	7-87	×	
										•					
Searches + *											Status	ESCALATE			
	-											OPEN	DISMESS		
Alerts (14792)	5)														
								10							
Filters				2 source type		10		10							
enrichmcountry															
÷		Score #			timestamp #	source:type 0	lp_arc_addr 0	enrichmxountry 8	ip_det_eddr 0						
-		- <u> -</u>	06af55c9-3		2017-08-01 11:47:55		192.168.138.158								
host 10 is.det.eddr 10		<u> </u> -	829ed3f6-6		2017-08-31 11:47:55		192.168.138.158								
guargador 9		- It	de53d302-b.		2017-08-01 11:47:55		192.168.66.1		192.168.66.15						
sourcetype 2			10	16744688-0		2017-08-30 08:07:59		192.168.66.1		192.168.66.15					
			10a83fa3-8		2017-08-30 12:43:58				62.75.195.236						
		- ŀ	680006c0-4.		2017-08-30 12:43:58		192.168.138.158								
		- It	163236fe-3		2017-08-30 12:43:58		192.168.66.1		192.168.66.15						
		<u> </u>	9af44ca9-c												
		ŀ	06/94046-7.	.fb113e6bce	2017-08-30 12:43:58				62.75.195.236						
			571618cb-a	7420f2bec2											
			3964#90Fb	aeb9d39c39											
				2ec148d8d8											
				_359faa0a78											
				.c2619a8a36											
			327e865e-1.												
			9eb/85f9-5												
			ce0d424a-6.												
			775b607e-2.	.f1365e19e0					72.34.49.86						
			3b22460c-a.												
				.737a2ecb5e			192.168.66.1								



Note

The UI displays the number of alerts corresponding to each facet next to the facet.

2. You can continue to apply filters to the alerts displayed in the **Alerts** window to further refine the alerts list.

As you select filters and facets, they are displayed in the Searches field.

For example, in the following figure, we've applied the source.type filter with the bro facet and then the ip_dst_addr filter with the IP address 95.163.121.204.

Searches + +	whice: type: b	na AND 1p_A	st_oddr(95.163.1	121.204					0	Alitime 🚽 🔍	
Verts (68863)											10NS -
Not 1 Is.dxt.addr 1					timestamp 8	ource:type 0	ip,aro,addr B	lp_det_eddr 0		alert_status 0	
			829ed315-6a514	ib0bdee						ESCALATE	
			05#155:9-334d:						payaun.com		
				9369685					_paysun.com		
									_paysun.com		
									peyeun.com		
			94855478-19996								
			8592+071-4158+		2017-08-01 11:47:						
			5d7a3954-7eaa								
			46315716-963d3	M22048	2017-08-01 11:47:						
			767203#Fcecb8	le6c5e9	2017-08-01 11:47:						
			75580dfc-93a54		2017-08-01 11:47:		192,168,138,158	95.163.121.204			
			e4287492-8074		2017-08-01 11:47:						
			19ba7d54-8180		2017-08-01 11:47:		192.168.138.158	95.163.121.204			
			34150931-829wb		2017-08-31 11:46:		192.168.138.158				
			382de09f-490ce		2017-08-31 11:46:		192.168.138.158	95.163.121.204			
			ac255440-912d		2017-08-01 11:46:		192.168.138.158	95.163.121.204			
			14e9fa2F041c4		2017-08-31 11:46:		192.168.138.158	95.163.121.204			
			87417519-8747		2017-08-31 11:46:	bro	192.168.138.158	95.163.121.204			
			Gee830ed-e 525/		2017-08-31 11:46:						
			725503ee-b		2017-08-01 11:46:		192.168.138.158	95.163.121.204			
			ade15aea-1//92		2017-08-01 11:46:	brio haan	192.168.138.158	95.163.121.204			
			a72d2458-e294		2017-08-01 11:46:		192.168.138.158	95.163.121.204	_paysun.com		
			bbfb9374-a_3aet		2017-08-01 11:46:	brio	192.168.138.158	95.163.121.204	paysun.com		
			e2dea435-a419e		2017-08-31 11:46:						

3.

To clear filters that have been populated to the **Searches** field, click (delete icon) at the end of the **Searches** field.

5.2.4. Managing Alert Status

You can manage one or more alerts at a time using the **ACTIONS** menu. To change the status of or dismiss an alert, complete the following steps:

1. Select an alert by clicking on empty space in the alert row.

The Alerts UI displays a panel listing the status of the alert all available data in Solr or Elasticsearch about the alert.

AVuKz1_n1l	_EanKS6q	btb 🗙	;		
Status	ESCALATE				
NEW	OPEN	DISMISS			
	RESOLVE				
	08	EN			
	40				
		oenix			
enrichments:geo:ip_sr US					
enrichments:geo:ip_sr 753					
	:ip_sr 33	.4499			
		08655			
enrichments:geo c_addr:locID	up_ar 53	08000			
	in ar 33	33.4499,-112.0712			
	:ip_sr -11	2.0712			
	ip_sr 85	004			
c_addr:postalCor					
	00	00:00:00:00:00			
	0x				
		00:00:00:00:00			
		ba8dec-278f-4f9f- 55-e98f6f4c1983			
	19				
	19	2.168.138.158			
		197			

Figure 5.6. Alerts Information Panel

The current alert status is highlighted.

Note

To manage more than one alert at a time, click the check boxes at the end of alert rows, then select the action you want to perform from the ACTIONS menu.

- 2. Click the new status you want to apply to the alert, then dismiss the panel.
- 3.

You can also add a comment to this action by clicking **base** (Comment button), entering your comment in the **Comments** field, and clicking **ADD COMMENT**.

829ed3f6-6034-4969-91c7-87 🗙					
Status	ESCALATE				
NEW	OPEN	DISMISS			
	RESOLVE				
Comments					
ADD COMMEN	Т				

The Alerts UI indicates that an alert has one or more comments by displaying comment icon) next to the alert status in the **Alerts** window.



Note

You cannot add a comment to an alert contained in a meta alert. You can only add comments to the meta alert.

4. To delete a comment, click the comment to delete, then click the trash can icon.

Click OK in the **Confirmation** dialog box.

5.2.4.1. Escalating an Alert

You can escalate one or more alerts at a time to create an event that can be tracked by an external ticketing system.

1. Select an alert by clicking on empty space in the alert row.

The Alerts UI displays a panel listing the status of the alert and all of the data in Solr or Elasticsearch about the alert.

AVuKz1_n1	LEanKS	6qbt	b :	×	
Status	ESCALA	νте			
NEW	OPEN		DISMISS		
	RESOL	VE			
		OPEN			
		40			
		Phoe	nix		
		US			
enrichments:geo:ip_sr 753 c_addr:dmaCode					
		33.44	199		
		5308	655		
		33.44	499,-112.0712		
		-112.	0712		
enrichments:geo c_addr:postalCo		8500	4		
		00:00	0:00:00:00:00		
		0x3C			
		00:00	00:00:00:00:00		
			8dec-278f-4f9 -e98f6f4c1983		
		1906			
			68.138.158		
		4919	7		

Figure 5.7. Alerts Information Panel

The current alert status is highlighted.



Note

To manage more than one alert at a time, click the check boxes at the end of alert rows, then select the action you want to perform from the ACTIONS menu.

2. Click ESCALATE.

829ed3f6-6034-4969-91c7-87 🗙			
Status	ESCALATE		
NEW	OPEN	DISMISS	
	RESOLVE		
Comments			
			4
ADD COMMEN	п		

HCP writes the event to a Kafka escalation topic. An external orchestration software can pick up the event from the topic and use the API to create an incident or append to an existing incident.

3.

You can also add a comment to this action by clicking **based** (Comment button), entering your comment in the **Comments** field, and clicking **ADD COMMENT**.

5.2.5. Grouping Alerts

You can group alerts so you can apply filters, status, etc. to multiple alerts at a time.

The Alerts UI currently provides five group types you can use:

- source.type
- ip_dst_addr
- host

- enrichments:geo_dst_addr:country
- ip_src_addr

To apply a group to your alerts, complete the following steps:

1. Click one of the groups listed by Group By.

The **Alerts** table view changes to a tree view listing the values of the groups.

In the following example, the group is source.type and the values are Snort and Bro.



Note

The icon to the left of the value provides the cumulative severity score for all the alerts in the value. If the score exceeds 999, then the value displays as 999+.

METRON				Logged in as a	
Searches + +				O Al time +	
Alerts (265379)					ACTIONS -
Filters entdws.country 3 v	Group By 2	10 9.00.000	10 Not		
Noti 10 V Iguaruador 10 V Iguaruador 9 V Iguaruador 9 V	👼 snort		7,065		
scuroetype 2 V	🂿 bro		ALDRTS 258,314		

2. Click one of the values to list the alerts for that value.

Searches +							0	All time 👻 🕻	۹ 🖻
Alerts (265379)									CTIONS -
		sup By	2 sourcetype	10 IpudeiLaddr	10 Noted		9 6.00		
Not 10 V Ig.dd.addr 10 V Ig.arc.addr 9 V asurcature 2 V	•	snort			7,065				
	٠	bro			258,314				
						watry & lip_det_addr #		alert_status 0	
			10x83fx3-841395e6201						
			0bf9d0d6-7fb113e8bce						

3. You can click an alert to add it to the Searches field.

Note

Searches will search through all the groups, not just the group containing the alert.

4. All features that are available for the Alerts table are available for the tree view.

For example, if you apply an action, such as Escalate, to an alert, it will apply to all alerts within the group. Similarly, if you search for a parameter, it will search all alerts within the group.

5. You can continue to refine your alerts by applying additional groups.

You can change the order in which the groups are applied to the alerts by clicking and dragging the groups on the **Groups By** line.

6. To ungroup your alerts and return to the Alerts window, click Ungroup which is located on the far right of the list of groups.

								•		
Verts (265379)								Ø		TIONS -
		sourcetype		10		10 out		y bure		
			timestamp #	source:type #	lp_arc_addr 0	enrichmtountry \$	ip_det_eddr 0	host \$	alert_status \$	
		129ed3f6-6a51eb0bdee	2017-08-01 11:47:55		192.168.138.158		95.163.121.204	7oqnanzwwnpaysun.com	ESCALATE	
sourcetype 2	ŀ	de53d302-b2fefcc094d					192.168.66.121	node1		

5.2.6. Creating a Meta Alert

The meta alert feature enables you to create a save a group of filtered alerts. Like the group feature, you can group filtered alerts that pertain to an incident. However, with meta alert, you can save your grouping, creating a system entity, to view it later. Also, when you filter alerts, if a relevant alert is contained in a meta alert, the entire meta alert will be included in the filter results.

To create a meta alert, complete the following steps:

1. Click one of the groups listed by Group By.

The Alerts table view changes to a tree view listing the values of the groups.

METRON					Logged in as as	dmin - Logout
Searches > +					O Al time +	
Alerts (265379)						ACTIONS -
Filters enistra.country 3 ~ ~	Group By	2 Bisingle	10 9.00.000	10 Not		
Not 10 v IputsLaddr 10 v Ipuscuaddr 9 v acurcetype 2 v				7,065		
	💿 bro			ALIRTS 258,314		

- 2. Use the **Search** and **GroupBy** options to create one or more groups containing alerts on which you want to focus.
- 3.

When you have selected a group of alerts that you want to focus on, click (meta alert icon), then confirm that you wish to create a meta alert with the selected alerts.

The meta alert disappears from the tree view. You can still see the meta alert in the alerts table view.

- 4. You can rename your meta alert by completing the following steps:
 - a. Display the Alerts UI display panel by clicking on empty space in the meta alert row.

AVuKz1_n1l	LEanKS6qb	tb	×
Status	ESCALATE		
NEW	OPEN	DISMISS	
	RESOLVE		
	OPE		
	40		
	tip_sr Pho	enix	
	tip_sr US		
	tip_sr 33.4	499	
	:ip_sr 530	8655	
		499,-112.0712	
	cip_sr -112	.0712	
enrichments:geo c_addr:postalCor		04	
	00:0	0:00:00:00:00	
	0x3	0	
	00:0	0:00:00:00:00	
		a8dec-278f-4f9 5-e98f6f4c198	-
	190		
	192	168.138.158	
ip_dst_port	491	97	

Figure 5.8. Alerts Information Panel

- b. Click the current meta alert name at the top of the panel and enter your new meta alert name.
- c. Dismiss the panel by clicking the X in the upper right corner of the panel.

5.3. Saving Your Searches

1.

To save a search, click the (save button) next to the **Searches** field.

2. When prompted, enter a name for the saved search parameters, then click Save.

This will save both the search parameters and the column configurations.

5.4. Viewing Your Recent and Saved Searches

You can view both your recent searches and saved searches in the Alerts UI.



1.

Note

The Alerts UI polling is paused whenever you open the Searches panel.

To view these saved searches, complete the following steps:

Click the **Searches** field.

The Alerts UI displays the Searches panel.

Figure 5.9. Searches Panel

Searches	×
Recent Searches	
timestamp:1492682496000	
ip_src_addr:204p:1492682496000	
ip:204-152.254.221	
ip_src_addr:204.152.254.221	
Saved Searches	
ip:204-152.254.221	

The **Searches** panel lists two types of searches:

Recent Searches	This is a list of your most recent searches.
	To display the saved search, simply click on the search name.
	The Alerts UI saves a maximum of ten of your most recent searches.
Saved Searches	This is a list of your saved searches.
	To display the saved search, simply click on the search name.
	You can delete any of these saved searches by clicking the trash can icon that becomes visible when you mouse over each saved search.

6. PCAP

The pcap data source can rapidly ingest raw data directly into HDFS from Kafka. As a result, you can store all of the raw packet capture data in HDFS and review or query it at a later date. The pcap data is not displayed in the Metron dashboard, but you can query, view, or retrieve the data in order to port it to another application like Wireshark. The following sections provide instructions on retrieving and filtering the pcap data using the utilities described in the following sections:

- Capturing pcap Data [34]
- Processing pcap Data [34]
- Viewing pcap Data [36]
- Filtering pcap Data [36]
- Porting pcap Data to Another Application [40]

6.1. Capturing pcap Data

In your production environment there is likely to be one or more hosts configured with one or more span ports that receives raw packet data from a packet aggregation device. You can use one of HCP's packet capture programs to capture the pcap data; pycapa and DPDK. These programs are responsible for capturing the raw packet data off the wire and sending that data to Kafka where it can be ingested by HCP.

The following example uses Pycapa.

service pycapa start

If everything worked correctly, the raw packet data can be consumed from a Kafka topic called pcap. The data is binary.

6.2. Processing pcap Data

After you capture some pcap data, the next step is to have HCP process the pcap data and store it in HDFS. Start the PCAP topology to begin this process. A Storm topology called 'pcap' is launched that consumes the raw pcap data from the Kafka topic and writes this data into sequence files in HDFS.

```
$ $METRON_HOME/bin/start_pcap_topology.sh
Running: /usr/jdk64/jdk1.8.0_77/bin/java -server -Ddaemon.name= -Dstorm.
options= -Dstorm.home=/usr/hdp/2.5.0.0-1245/storm -Dstorm.log.dir=/var/log/
storm -Djava.library.path=/usr/local/lib:/opt/local/lib:/usr/lib -Dstorm.conf.
```

```
file= -cp /usr/hdp/2.5.0.0-1245/storm/lib/log4j-core-2.1.jar:/usr/hdp/2.5.
0.0-1245/storm/lib/storm-core-1.0.1.2.5.0.0-1245.jar:/usr/hdp/2.5.0.0-1245/
storm/lib/minlog-1.3.0.jar:/usr/hdp/2.5.0.0-1245/storm/lib/objenesis-2.1.
jar:/usr/hdp/2.5.0.0-1245/storm/lib/ring-cors-0.1.5.jar:/usr/hdp/2.5.0.0-1245/
storm/lib/storm-rename-hack-1.0.1.2.5.0.0-1245.jar:/usr/hdp/2.5.0.0-1245/
storm/lib/disruptor-3.3.2.jar:/usr/hdp/2.5.0.0-1245/storm/lib/kryo-3.0.3.
jar:/usr/hdp/2.5.0.0-1245/storm/lib/log4j-over-slf4j-1.6.6.jar:/usr/hdp/2.5.0.
0-1245/storm/lib/reflectasm-1.10.1.jar:/usr/hdp/2.5.0.0-1245/storm/lib/log4j-
slf4j-impl-2.1.jar:/usr/hdp/2.5.0.0-1245/storm/lib/log4j-api-2.1.jar:/usr/
hdp/2.5.0.0-1245/storm/lib/clojure-1.7.0.jar:/usr/hdp/2.5.0.0-1245/storm/lib/
zookeeper.jar:/usr/hdp/2.5.0.0-1245/storm/lib/servlet-api-2.5.jar:/usr/hdp/
2.5.0.0-1245/storm/lib/slf4j-api-1.7.7.jar:/usr/hdp/2.5.0.0-1245/storm/lib/
asm-5.0.3.jar org.apache.storm.daemon.ClientJarTransformerRunner org.apache.
storm.hack.StormShadeTransformer /usr/metron/0.3.0/lib/metron-pcap-backend-0.
3.0.jar /tmp/d5f844e8b1a611e6a6d10a0a570e5f4d.jar
Running: /usr/jdk64/jdk1.8.0_77/bin/java -client -Ddaemon.name= -Dstorm.
options= -Dstorm.home=/usr/hdp/2.5.0.0-1245/storm -Dstorm.log.dir=/var/
log/storm -Djava.library.path=/usr/local/lib:/opt/local/lib:/usr/lib:/usr/
hdp/current/storm-client/lib -Dstorm.conf.file= -cp /usr/hdp/2.5.0.0-1245/
storm/lib/log4j-core-2.1.jar:/usr/hdp/2.5.0.0-1245/storm/lib/storm-core-1.
0.1.2.5.0.0-1245.jar:/usr/hdp/2.5.0.0-1245/storm/lib/minlog-1.3.0.jar:/
usr/hdp/2.5.0.0-1245/storm/lib/objenesis-2.1.jar:/usr/hdp/2.5.0.0-1245/
storm/lib/ring-cors-0.1.5.jar:/usr/hdp/2.5.0.0-1245/storm/lib/storm-rename-
hack-1.0.1.2.5.0.0-1245.jar:/usr/hdp/2.5.0.0-1245/storm/lib/disruptor-3.
3.2.jar:/usr/hdp/2.5.0.0-1245/storm/lib/kryo-3.0.3.jar:/usr/hdp/2.5.0.
0-1245/storm/lib/log4j-over-slf4j-1.6.6.jar:/usr/hdp/2.5.0.0-1245/storm/
lib/reflectasm-1.10.1.jar:/usr/hdp/2.5.0.0-1245/storm/lib/log4j-slf4j-
impl-2.1.jar:/usr/hdp/2.5.0.0-1245/storm/lib/log4j-api-2.1.jar:/usr/hdp/
2.5.0.0-1245/storm/lib/clojure-1.7.0.jar:/usr/hdp/2.5.0.0-1245/storm/lib/
zookeeper.jar:/usr/hdp/2.5.0.0-1245/storm/lib/servlet-api-2.5.jar:/usr/hdp/
2.5.0.0-1245/storm/lib/slf4j-api-1.7.7.jar:/usr/hdp/2.5.0.0-1245/storm/lib/
asm-5.0.3.jar:/tmp/d5f844e8b1a611e6a6d10a0a570e5f4d.jar:/usr/hdp/current/
storm-supervisor/conf:/usr/hdp/2.5.0.0-1245/storm/bin -Dstorm.jar=/tmp/
d5f844e8b1a611e6a6d10a0a570e5f4d.jar org.apache.storm.flux.Flux --remote /
usr/metron/0.3.0/flux/pcap/remote.yaml --filter /usr/metron/0.3.0/config/pcap.
properties
###########
               ###
                     ###### ###
                     ############
###########
               ###
                     ### ######
###### ###
               ###
       ###
                     ### ######
######
               ###
       *****************
###
###
       Apache Storm
+ -
                              -+
+- data FLow User eXperience -+
Version: 1.0.1
Parsing file: /usr/metron/0.3.0/flux/pcap/remote.yaml
636
    [main] INFO o.a.s.f.p.FluxParser - loading YAML from input stream...
    [main] INFO o.a.s.f.p.FluxParser - Performing property substitution.
638
639
    [main] INFO o.a.s.f.p.FluxParser - Not performing environment variable
substitution.
907 [main] WARN o.a.s.f.FluxBuilder - Found multiple invokable methods for
class org.apache.metron.spout.pcap.SpoutConfig, method from, given arguments
[END]. Using the last one found.
976 [main] INFO o.a.s.f.FluxBuilder - Detected DSL topology...
  ----- TOPOLOGY DETAILS ------
Topology Name: pcap
----- SPOUTS ------
kafkaSpout [1] (org.apache.metron.spout.pcap.KafkaToHDFSSpout)
----- BOLTS -----
 ----- STREAMS ------
```

```
1157 [main] INFO o.a.s.f.Flux - Running remotely...
1157 [main] INFO o.a.s.f.Flux - Deploying topology in an ACTIVE state...
1194 [main] INFO o.a.s.StormSubmitter - Generated ZooKeeper secret payload
for MD5-digest: -8340121339010421700:-4824301672672404920
1268 [main] INFO o.a.s.s.a.AuthUtils - Got AutoCreds []
1343 [main] INFO o.a.s.StormSubmitter - Uploading topology jar /tmp/
d5f844e8bla61le6a6d10a0a570e5f4d.jar to assigned location: /data1/hadoop/
storm/nimbus/inbox/stormjar-49aedc3d-a259-409d-a96b-4b615ce07076.jar
1810 [main] INFO o.a.s.StormSubmitter - Successfully uploaded topology jar
to assigned location: /data1/hadoop/storm/nimbus/inbox/stormjar-49aedc3d-
a259-409d-a96b-4b615ce07076.jar
1820 [main] INFO o.a.s.StormSubmitter - Submitting topology pcap in
distributed mode with conf { "topology.workers":1, "storm.zookeeper.
topology.auth.scheme": "digest", "storm.zookeeper.topology.auth.
payload":"-8340121339010421700:-4824301672672404920"}
2004 [main] INFO o.a.s.StormSubmitter - Finished submitting topology: pcap
```

6.3. Viewing pcap Data

To view the pcap data, use the pcap inspector utility, <code>\$METRON_HOME/bin/pcap_inspector.sh</code>. This utility enables you to retrieve and view portions of the sequence files which store the pcap data in HDFS.

```
usage: PcapInspector
-h,--help Generate Help screen
-i,--input <SEQ_FILE> Input sequence file on HDFS
-n,--num_packets <N> Number of packets to dump
```

6.4. Filtering pcap Data

You can search or filter the pcap data using either a command line tool or a REST API. The following sections describe how to use each of these tools to query the pcap data:

- Using CLI to Query pcap Data [36]
- Using REST API to Query pcap Data [39]

6.4.1. Using CLI to Query pcap Data

You can search or filter the PCAP data with one of the following command line tools:

- Fixed filter option
- Query filter option (Metron Stellar)

Filtering can be done both by the packet header as well as via a binary regular expression which can be run on the packet payload itself. This filter can be specified via:

- The -pf or --packet_filter options for the fixed query filter
- The BYTEARRAY_MATCHER(pattern, data) Stellar function. The first argument is the regex pattern and the second argument is the data. The packet data will be exposed via the packet variable in Stellar.

Both the fixed filter option tool and query filter option tool are executed by $f(metron_home)/bin/pcap_query.sh [fixed|query]$



Note

Because the output from a query can be very large, we recommend appending -rpf \$Number_of_records to the end of the filter command. This argument creates multiple files, populating them with the specified number of records and titling them with timestamps.

You can filter or query for the following fields in the PCAP data:

- ip_scr_addr
- ip_dst_addr
- ip_src_port
- ip_dst_port
- protocol
- timestamp

Fixed filter options:

```
-bop,--base_output_path <arg> Query result output path. Default is
                                '/tmp'.
-bp,--base_path <arg>
                               Base PCAP data path. Default is
                               '/apps/metron/pcap'.
-da,--ip_dst_addr <arg>
                               Destination IP address.
-df,--date_format <arg>
                               Date format to use for parsing start_time
                               and end_time. Default is to use time in
                               millis since the epoch.
-dp,--ip_dst_port <arg>
-pf, --packet_filter <arg>
                               Destination port.
                              Packet filter regex
-et,--end_time <arg>
                               Packet end time range. Default is current
                               system time.
-nr,--num_reducers <arg>
                               The number of reducers to use. Default
                               is 10.
-h,--help
                               Display help.
-ir,--include_reverse
                               Indicates if filter should check swapped
                               src/dest addresses and IPs.
-p,--protocol <arg>
                               IP Protocol.
                                Maximum number of records per file.
-rpf
-sa,--ip_src_addr <arg>
                               Source IP address.
-sp,--ip_src_port <arg>
                                Source port.
-st,--start_time <arg>
                               (required) Packet start time range.
```

Fixed filter examples:

\$METRON_HOME/bin/pcap_query.sh fixed \
 -st "20160617" \
 -df "yyyyMMdd" \
 -sa 192.168.138.158 \
 -da 123.456.789.012 \

```
-sp 49197 \
-dp 80 \
-p 6
-rpf 500
```

To search for every packet that has an ip_dst_port of 8080 and contains the text "persist", run:

```
$METRON_HOME/bin/pcap_query.sh fixed \
          --ip_dst_port 8080 \
          --packet_filter \
          "\`persist\`" \
          -st "20170425" \
          -df "yyyyMMdd"
```

Query filter options:

```
-bop,--base_output_path <arg> Query result output path. Default is
                               '/tmp'.
-bp,--base_path <arg>
                               Base PCAP data path. Default is
                               '/apps/metron/pcap'.
                               Date format to use for parsing start_time
-df,--date_format <arg>
                               and end_time. Default is to use time in
                               millis since the epoch.
-et,--end_time <arg>
                               Packet end time range. Default is current
                               system time.
-nr,--num_reducers <arg>
                               The number of reducers to use. Default
                               is 10.
                               Display help.
-h,--help
                               Query string to use as a filter.
-q,--query <arg>
                               Maximum number of records per file.
-rpf
                               (required) Packet start time range.
-st,--start_time <arg>
```

The Query filter's --query argument specifies the Stellar expression to execute on each packet. To interact with the packet, a few variables are exposed:

- packet: The packet data (a byte[])
- ip_src_addr: The source address for the packet (a String)
- ip_src_port : The source port for the packet (an Integer)
- ip_dst_addr : The destination address for the packet (a String)
- ip_dst_port : The destination port for the packet (an Integer)
- BYTEARRAY_MATCHER : The first argument is the regex pattern and the second argument is the data. The packet data will be exposed via the packet variable in Stellar.

Query filter examples:

and protocol == '6'" -rpf 500

To search for every packet that has an ip_dst_port of 8080 and contains the text "persist", run:

```
$METRON_HOME/bin/pcap_query.sh query \
    --query "ip_dst_port == 8080 &&
    BYTEARRAY_MATCHER('\`persist\`', packet)" \
    -st "20170425" \
    -df "yyyyMMdd"
```

You can also do proper binary regexes that look for packets containing the text "persist" and the 2 byte sequence 0x1F909 (in hex):

```
$METRON_HOME/bin/pcap_query.sh query \
          --query "BYTEARRAY_MATCHER('1F90', packet) &&
        BYTEARRAY_MATCHER('\`persist\`', packet)" \
        -st "20170425" \
        -df "yyyyMMdd"
```

Other examples:

```
$METRON_HOME/bin/pcap_query.sh query \
                                       -st "1466136000000" \
                                       --query "IN_SUBNET(ip_src_addr, '192.
168.0.0/24') and ip_src_port == '49197' \
                                                 and ip_dst_addr == '123.456.
789.012' and ip_dst_port == '80' \
                                                 and protocol == '6'"
                                       -rpf 500
# subnet function checks IP is in specified subnet
      --query "IN_SUBNET(ip_src_addr, '192.168.0.0/24') \
               and ip_src_port == '49197' \setminus
               and ip_dst_addr == '123.456.789.012' \
               and ip_dst_port == '80' \setminus
               and protocol == '6'"
# range queries on ports
      --query "ip_src_port <= 50000 and ip_dst_port >= 30000"
# range queries with conditionals and parens
      --query "(ip_src_port < 50000 and ip_src_port > 40000) \setminus
            or (ip_src_port < 20000 and ip_src_port > 10000)"
# in/not in list of values
      --query "ip_src_port < 10000 and ip_dst_port in ['54056', '54057',
 '8080']"
```

6.4.2. Using REST API to Query pcap Data

The REST API is an alternative to using the CLI and Stellar to query the pcap data. The purpose of this service is to provide a middle tier to negotiate retrieving packet capture data that flows into HCP. This packet data is in a form that libpcap-based tools can read. The REST API exposes the query functionality via http.

This fixed filter is less expressive than the CLI/Stellar filter option. The fixed filter gives you the following values that you can filter on:

- srclp
- srcPort
- dstlp
- dstPort
- startTime
- endTime

The fixed filter filters on explicit matches only so you cannot use any specialized functions or comparison operators. The query filter is far more expressive because it exposes Stellar, which enables the user to invoke specialized functions, use comparison operators, and perform boolean logic on the parameters.

You can start the fixed filter service either via the init.d script installed, /etc/init.d/ pcapservice or directly via the yarn jar command:

```
yarn jar $METRON_HOME/lib/metron-api-$METRON_VERSION.jar org.apache.metron.
pcapservice.rest.PcapService -port $SERVICE_PORT -query_hdfs_path $QUERY_PATH
  -pcap_hdfs_path $PCAP_PATH
```

where

- METRON_HOME is the location of the metron installation
- METRON_VERSION is the version of the metron installation
- SERVICE_PORT is the port to bind the REST service to
- QUERY_PATH is the temporary location to store query results. They are deleted after the service reads them.
- PCAP_PATH is the path to the packet data on HDFS

6.5. Porting pcap Data to Another Application

When you user the pcap query utility to extract pcap data, the utility creates a libpcapcompliant pcap file in the current working directory.

```
[root@ip-10-0-0-53 0.3.0]# ls -1
total 72
drwxr-xr-x. 2 livy games 4096 Nov 22 22:36 bin
drwxr-xr-x. 3 livy games 4096 Nov 23 17:10 config
drwxr-xr-x. 2 livy games 4096 Sep 29 17:44 ddl
drwxr-xr-x. 6 livy games 4096 Aug 22 14:54 flux
drwxr-xr-x. 2 root root 4096 Nov 23 17:07 lib
drwxr-xr-x. 2 livy games 4096 Nov 22 22:36 patterns
-rw-r--r-. 1 root root 48506 Nov 23 18:06 pcap-data-20161123180607184+0000.
pcap
[root@ip-10-0-0-53 0.3.0]# file pcap-data-20161123180607184+0000.pcap
pcap-data-20161123180607184+0000.pcap: tcpdump capture file (little-endian) -
version 2.4 (Ethernet, capture length 65535)
```

You can open the libpcap-compliant pcap file with any third-party tool that supports the file type. For example, you can load Wireshark and choose **File** > Open. Wireshark will load the pcap file.

				Open Capture File			
		• • •					
1	Welcome to Capture	Look in:	Look in: /Users/nallen/tmp/pcap				
-		Compute	Name poap-data-2016107184+0000.pcap	-	-		
	Wi-Fi: en0 Thunderbolt Br p2p0 awdi0 dun0						
Thunderb Thunderb utun2 Display Et	Display FireWit Thunderbolt 1: Thunderbolt 2:	File name:	pcap-data-20161123180607184+0000.pcap			Open	
	Display Ethern- Loopback: Io0	Files of type:	All Files (*.*)		8	Help	
	vbcxnet2 vbcxnet3 vbcxnet4 vbcxnet5 vbcxnet6 vbcxnet7 vbcxnet8		Automatic MAC name resolution Transport name resolution Network name resolution 2 External name resolutor	Format: Size: Packets: First Packet: Elapsed Time	Wireshark/tcpdump/ pcap 48506 bytes 337 2016-11-23 13:02:28		
			Apply a read filter	Capaco Tana	0.02.00		
L	.earn						
	Iner's Guide	Wiki - Owertie	ons and Answers · Mailing Lists				

The content of the file will be similar to the following:

	ly a display filter			Destination			Expression
λ.	Time	12:03:30 106706	Source 192,168,138,158	95,163,121,284	Protocol	Length	49286 - 88 [ACK] Seg=1 Ack=1 Win=64248 Len=8
			192,168,138,158	95,163,121,284	HTTP		GET /imo/flags/us.png HTTP/1.1
			192, 168, 138, 158	95,163,121,284	HTTP		GET /img/flags/it.png HTTP/1.1
			192,168,138,158	95.163.121.284	TCP		49287 - 88 [SYN] Seg=8 Win=8192 Len=8 MSS=1468 WS=4 SACK_PERM=1
			192, 168, 138, 158	95,163,121,284	TCP		49288 - 80 [SYN] Seg=0 Win=8192 Len=0 MSS=1468 WS=4 SACK_PERM=1
	6 2016-11-23	13:02:28.122073	192.168.138.158	95.163.121.284	TCP		49289 - 80 [SYN] Seg=0 Win=8192 Len=0 MSS=1460 WS=4 SACK_PERM=1
	7 2016-11-23	13:02:28.123926	192.168.138.158	95.163.121.284	TCP	66	49210 - 88 [SYN] Seg=0 Win=8192 Len=0 MSS=1468 WS=4 SACK_PERM=1
	8 2016-11-23	13:02:28.309501	192.168.138.158	95.163.121.204	TCP	60	49288 - 88 [ACK] Seg=1 Ack=1 Win=256968 Len=8
	9 2016-11-23	13:02:28.309604	192.168.138.158	95.163.121.204	TCP		49207 - 80 [ACK] Seq=1 Ack=1 Win=256960 Len=0
			192.168.138.158	95.163.121.204	TCP		49210 - 80 [ACK] Seq=1 Ack=1 Win=256960 Len=0
		13:02:28.310020		95.163.121.284	HTTP		GET /picture.php?k=11iqmfg6b7f2a994c3eaaf014608b272c46cf764 HTTP/
		13:02:28.310599		95.163.121.204	HTTP		GET /img/flags/es.pmg HTTP/1.1
			192.168.138.158	95.163.121.204	HTTP		GET /img/lt.png HTTP/1.1
			192.168.138.158	95.163.121.204	TCP		49209 - 80 [ACK] Seq=1 Ack=1 Win=256960 Len=0
			192.168.138.158	95.163.121.204	HTTP		GET /img/flags/de.png HTTP/1.1
			192.168.138.158	95.163.121.204	HTTP		GET /img/flags/fr.png HTTP/1.1
			192.168.138.158 192.168.138.158	95.163.121.204 95.163.121.204	HTTP		GET /img/rt.png HTTP/1.1 GET /img/lb.png HTTP/1.1
		13:02:30.243622		95,163,121,204	TCP		49288 - 88 [ACK] Seg=488 Ack=2144 Min=256968 Len=8
		13:02:30.243022		95,163,121,204	HTTP		GET /img/rb.png HTTP/1.1
			192,168,138,158	95,163,121,284	TCP		49287 - 80 [ACK] Seg=442 Ack=899 Win=253368 Len=0
			192.168.138.158	95.163.121.204	TCP		49289 - 88 [ACK] Seg=442 Ack=799 Win=253768 Len=8
			192,168,138,158	95,163,121,284	TCP		49286 → 88 [A(K] Seg=883 Ack=1775 Win=64248 Len=8
			192,168,138,158	95,163,121,284	TCP		49285 - 88 [ACK] Seg=877 Ack=1581 Win=64248 Len=8
			192, 168, 138, 158	95,163,121,284	TCP		49210 - 80 [ACK] Seg=871 Ack=978 Win=253852 Len=8
			192, 168, 138, 158	95,163,121,284	HTTP		GET /favicen.ico HTTP/1.1
	33 3016 14 33	43.43.33 460336	A11 OCL A11 COL	05 153 131 304	TCD	64	10300 00 145V1 5 015 4-0-3530 MI355015 1
			its), 60 bytes capt	red (480 bits) (00), Dst: 00:00:00.00;			00.00.00)
			: 192.168.138.158, 1		100100 (00	1001001	001001007
				86), Dst Port: 80 (80),	Seat 1	Acks 1	Len: A
					and at	and ap	
10			10 00 00 08 08 00 45 00 33 c0 a8 8a 9e 5f a3				
28	79 cc c8 36	N8 58 a8 8d ac 2	15 b9 3a 17 7e 50 10	¥6.P			
30	fa fê aa ba i	0 00 00 00 00 0	0 00 00				